


A Simulation Model of Urban Disaster Recovery and Resilience: Implementation for the 1994 Northridge Earthquake

by
Scott B. Miles and Stephanie E. Chang

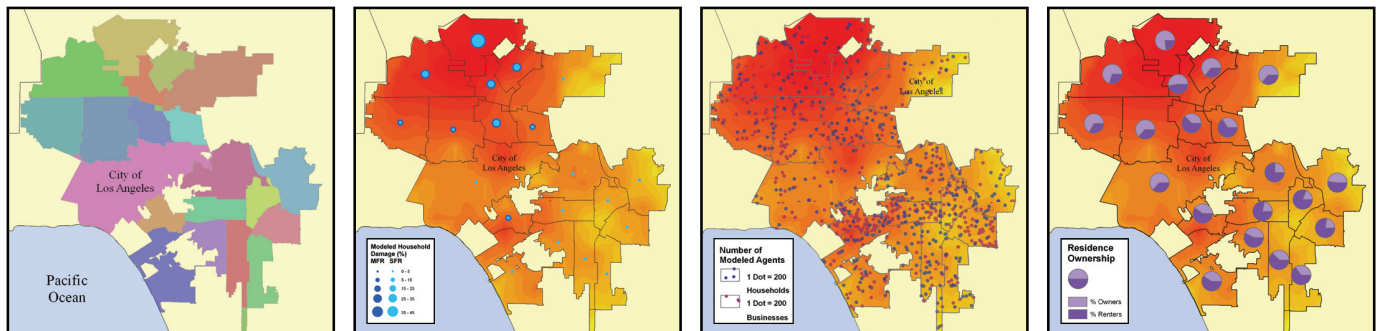

Technical Report MCEER-07-0014

September 7, 2007

NOTICE

This report was prepared by the University of British Columbia as a result of research sponsored by MCEER through a grant from the Earthquake Engineering Research Centers Program of the National Science Foundation under NSF award number EEC-9701471 and other sponsors. Neither MCEER, associates of MCEER, its sponsors, the University of British Columbia, nor any person acting on their behalf:

- a. makes any warranty, express or implied, with respect to the use of any information, apparatus, method, or process disclosed in this report or that such use may not infringe upon privately owned rights; or
- b. assumes any liabilities of whatsoever kind with respect to the use of, or the damage resulting from the use of, any information, apparatus, method, or process disclosed in this report.

Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of MCEER, the National Science Foundation, or other sponsors.

A Simulation Model of Urban Disaster Recovery and Resilience: Implementation for the 1994 Northridge Earthquake

by

Scott B. Miles¹ and Stephanie E. Chang²

Publication Date: September 7, 2007

Submittal Date: July 18, 2007

Technical Report MCEER-07-0014

Task Number 9.3.3

NSF Master Contract Number EEC 9701471

- 1 Assistant Professor, Institute for Global & Community Resilience, Department of Environmental Studies, Huxley College of the Environment, Western Washington University
- 2 Associate Professor, School of Community and Regional Planning, and Institute for Resources, Environment and Sustainability, University of British Columbia

MCEER

University at Buffalo, The State University of New York

Red Jacket Quadrangle, Buffalo, NY 14261

Phone: (716) 645-3391; Fax (716) 645-3399

E-mail: mceer@buffalo.edu; WWW Site: <http://mceer.buffalo.edu>


Preface

The Multidisciplinary Center for Earthquake Engineering Research (MCEER) is a national center of excellence in advanced technology applications that is dedicated to the reduction of earthquake losses nationwide. Headquartered at the University at Buffalo, State University of New York, the Center was originally established by the National Science Foundation in 1986, as the National Center for Earthquake Engineering Research (NCEER).

Comprising a consortium of researchers from numerous disciplines and institutions throughout the United States, the Center's mission is to reduce earthquake losses through research and the application of advanced technologies that improve engineering, pre-earthquake planning and post-earthquake recovery strategies. Toward this end, the Center coordinates a nationwide program of multidisciplinary team research, education and outreach activities.

MCEER's research is conducted under the sponsorship of two major federal agencies: the National Science Foundation (NSF) and the Federal Highway Administration (FHWA), and the State of New York. Significant support is derived from the Federal Emergency Management Agency (FEMA), other state governments, academic institutions, foreign governments and private industry.

MCEER's NSF-sponsored research objectives are twofold: to increase resilience by developing seismic evaluation and rehabilitation strategies for the post-disaster facilities and systems (hospitals, electrical and water lifelines, and bridges and highways) that society expects to be operational following an earthquake; and to further enhance resilience by developing improved emergency management capabilities to ensure an effective response and recovery following the earthquake (see the figure below).

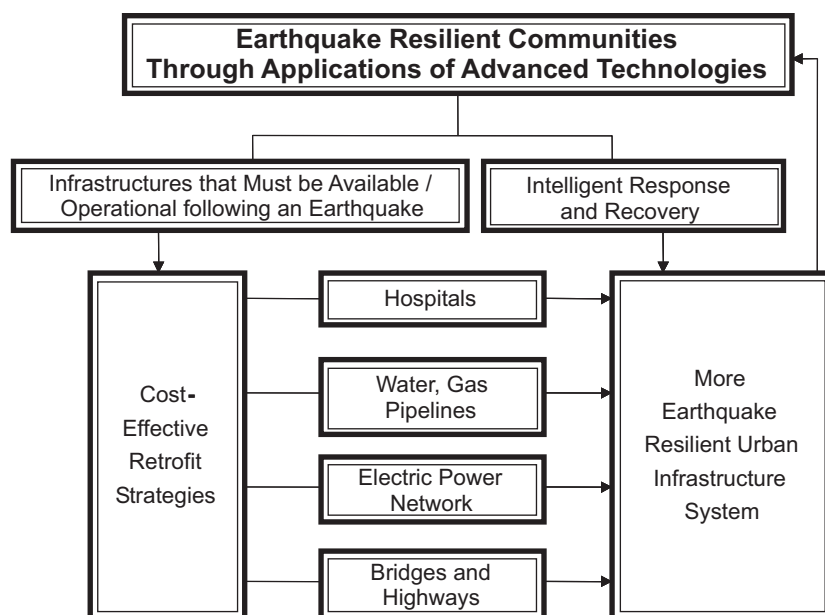

A cross-program activity focuses on the establishment of an effective experimental and analytical network to facilitate the exchange of information between researchers located in various institutions across the country. These are complemented by, and integrated with, other MCEER activities in education, outreach, technology transfer, and industry partnerships.

This technical report describes a computer-based model of urban disaster recovery. The model simulates the recovery dynamics of households, businesses, neighborhoods, and the community as a whole following a disaster. The model was applied to the City of Los Angeles for the 1994 Northridge earthquake, using detailed data on the conditions and effects of the earthquake for testing and calibration purposes. Results indicated favorable performance in certain aspects of the model and identified areas where further refinements are needed. Examples of “what-if” explorations are provided to illustrate the types of analyses that can be conducted with this model. The report concludes with a discussion of potential applications, advances, limitations, and priorities for further research. The first-generation of this model was described in a previous MCEER report, “Urban Disaster Recovery: A Framework and Simulation Model,” by Scott B. Miles and Stephanie E. Chang, MCEER-03-0005.

ABSTRACT

This technical report describes a computer-based model of urban disaster recovery. The model simulates the recovery dynamics of households, businesses, neighborhoods, and the community as a whole following a disaster. Building on prior work, this model represents a second-generation prototype. Like its predecessor, the model is based in the empirical literature and is distinctive in its emphasis on recovery time paths, spatial disparities, and linkages between different sectors of a community. Household recovery, for example, is influenced not only by housing damage but socio-economic attributes such as income level as well as by business recovery and the loss and restoration of critical infrastructures. Significant improvements have been made to both the underlying conceptual model and the model's implementation. A key refinement of the conceptual model pertains to the use of more meaningful indicators of recovery. With respect to implementation, the model is now fully modular in design, which provides substantially greater flexibility in implementation and testing. The model is also now scalable, allowing ready representation of any number of neighborhoods and agents within these neighborhoods. The refined model is applied to the City of Los Angeles for the 1994 Northridge earthquake. Extensive efforts were made to gather detailed data on the conditions and effects of the Northridge earthquake, and to use these data to test and calibrate the model to the extent possible. Nonetheless, available data were found to be quite limited for model calibration purposes. Results indicated favorable performance in certain aspects of the model and identified areas where further refinements are needed. Models of urban disaster recovery have several potential uses, including decision support and education. Examples of "what-if" explorations are provided to illustrate the types of analyses that can be conducted with this model. The report concludes with a discussion of potential applications, advances, limitations, and priorities for further research. One of the greatest needs is for more systematic empirical data on pre-disaster urban conditions, as well as disaster recovery.

ACKNOWLEDGEMENT

This work was supported primarily by the Earthquake Engineering Research Centers Program of the National Science Foundation under NSF Award Number EEC-9701471. Any opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect those of the National Science Foundation.

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1	Introduction	1
2	Model Development	3
	2.1 Conceptual Model	3
	2.1.1 Agent Recovery Concepts	8
	2.1.2 Household Recovery	8
	2.1.3 Businesses Recovery	10
	2.1.4 Agent Financial Resources	10
	2.1.5 Lifeline Restoration	10
	2.2 Improved Implementation	11
	2.2.1 Software Design Revisions	11
	2.2.2 Algorithm Implementation Revisions	12
3	Northridge Application	15
	3.1 Agent Demographics	16
	3.2 Households	20
	3.3 Businesses	26
	3.4 Lifeline System	29
4	Co-Event Model Calibration and Results	31
	4.1 Household Calibration and Results	31
	4.2 Business Calibration and Results	40
5	Post-Event Model Calibration and Results	49
	5.1 Households	49
	5.1.1 Reconstruction	49
	5.1.2 Health	56
	5.1.3 Debt	58
	5.1.4 Leave	60
	5.2 Businesses	63
	5.2.1 Reconstruction	63
	5.2.2 Demand	67
	5.2.3 Production	69
	5.2.4 Employment	71
	5.2.5 Debt	74
	5.2.6 Failure	76

TABLE OF CONTENTS (cont'd)

SECTION	TITLE	PAGE
6	Conclusions	79
	6.1 What-if applications: preliminary examples	79
	6.1.1 Types of "what-if" questions	79
	6.1.2 Examples of "what-if" scenarios	81
	6.2 Advances, contributions, and limitations	82
	6.3 Prospects and areas for further research	84
7	References	87

LIST OF ILLUSTRATIONS

FIGURE	TITLE	PAGE
2-1	Generalized static model of community recovery from disasters	4
2-2	Detailed static model of community recovery from disasters	5
3-1	Map showing Public Use Microdata Units for the City of Los Angeles	18
3-2	Map showing number of Los Angeles businesses and households modeled for application to the Northridge earthquake.	19
3-3	Proportion of higher and lower income households.	22
3-4	Proportion of households who own versus rent their residence, based on the 1990 census	23
3-5	Proportion of single- versus multi-family buildings, based on the 1990 census	24
3-6	Proportion of households with high versus low level of structural mitigation done to their residence	25
3-7	Proportion of export-oriented versus locally-oriented businesses, based on the 1994 economic census	28
3-8	Restoration of actual traffic volumes after the Northridge earthquake, and derived measures for evaluating post-disaster transportation service performance	29
4-1	Comparison of modeled and actual relationship (from EQE, 1995) between mean building damage and mean Modified Mercalli Intensity (average across each study unit)	32
4-2	Modeled percentage of household residences damaged by Northridge ground shaking	33
4-3	Modeled proportion of damaged residences with low, medium, and high damage levels	34
4-4	Comparison of modeled and actual relationship between household injury rate and mean Modified Mercalli Intensity (averaged over each study unit)	35
4-5	Modeled percentage of households experiencing some injury	36
4-6	Comparison of injury rate between lower and upper income households	37
4-7	Modeled proportion of injured households with higher versus lower income	38
4-8	Modeled percentage of households with insurance	39
4-9	Comparison of modeled and actual building damage for businesses	41
4-10	Modeled percentage of businesses with some damage	42
4-11	Modeled proportion of business with low, medium (yellow tag), and high (red tag) damage levels	43

LIST OF ILLUSTRATIONS (cont'd)

FIGURE	TITLE	PAGE
4-12	Mean building damage of businesses versus mean Modified Mercalli Intensity	44
4-13	Modeled proportion of businesses with versus without insurance	45
4-14	Modeled relationship between mean business demand reduction and mean Modified Mercalli Intensity	46
4-15	Modeled level of consumer demand reduction for businesses	47
5-1	Residential reconstruction over time for all residences, multi-family, and single family, modeled using calibration input data set.	50
5-2	Residential reconstruction over time for all residences, residences with lower incomes and residences with higher incomes modeled using calibration input data set.	51
5-3	Residential reconstruction over time for all residences, households that rent, and households that own, modeled using calibration input data set.	51
5-4	Residential reconstruction over time for all residences, multi-family, and single family, modeled using the non-calibration data set.	52
5-5	Residential reconstruction over time for all residences, households with lower incomes and residences with higher incomes modeled using the non-calibration data set	53
5-6	Residential reconstruction over time for all residences, households that rent, and households that own, modeled using the non-calibration data set	53
5-7	Map showing time to rebuild all damaged residential buildings within each PUMA unit.	55
5-8	Map showing time to complete health recovery for all residents in each PUMA	57
5-9	Map showing modeled initial post-disaster debt levels due to the Northridge earthquake	59
5-10	Cumulative number of homeowners and renters modeled to have left their residence over time show in comparison to data from a 1995 LA Times poll	60
5-11	Map showing the percentage of households modeled to leave their residence as a result of the Northridge earthquake	62
5-12	The percentage of business facilities reconstructed over time for small and large businesses	64
5-13	The percentage of business facilities reconstructed over time for smaller and larger facilities	65
5-14	Map showing time to rebuild all damaged business facilities within each PUMA	66
5-15	Map showing time to recover business demand for all businesses within each Los Angeles PUMA	68

LIST OF ILLUSTRATIONS (cont'd)

FIGURE	TITLE	PAGE
5-16	Map of relative business production levels three months after the earthquake	70
5-17	Normalized comparison of modeled reduction in employment and employment loss data from Gordon et al. (1995) for selected aggregated PUMAs	72
5-18	Comparison of modeled employment recovery and the ratio of the number of workers, by PUMA, in August 1994 to the number in August 1993	72
5-19	Map of modeled employment levels by PUMA four years after the Northridge earthquake relative to pre-earthquake employment	73
5-20	Map of average debt levels due to the Northridge earthquake disaster for each Los Angeles PUMA	75
5-21	Modeled rate of business failure as a percentage of all business in Los Angeles	76
5-22	Map of business failure rates for each Los Angeles PUMA five years after the Northridge earthquake	77
6-1	Reconstruction curves for "what-if" scenarios. (a) Baseline case, (b) Code year delayed, (c) No income disparity.	83

LIST OF TABLES

TABLE	TITLE	PAGE
2-1	Variable definitions for recovery model	6
2-2	Functional dependencies between variables of the recovery model	9
3-1	Overview of major data sources for Northridge application	16
3-2	Mapping between Standard Industry Classification sectors and recovery model SECT variable	27
4-1	Residential building damage fragility curve parameters—median and variance for lognormal cumulative distribution functions	31
4-2	Business building damage fragility curve parameters—median and variance for lognormal cumulative distribution functions	40
5-1	Statistics related to households modeled to leave or stay in their residence	63
5-2	Statistics on modeled business failure due to the Northridge earthquake	78

SECTION 1 INTRODUCTION

A community's resilience is reflected in how quickly and thoroughly it recovers from a disaster. The pace and quality of recovery are closely linked to the initial damage suffered in the disaster, the ability of the system to weather this damage, and the actions taken to respond to it. These dimensions of resilience are referred to as "rapidity," "robustness," "redundancy," and "resourcefulness" in MCEER's approach to quantifying resilience (Bruneau et al., 2003).

A community's potential to recover from a disaster is difficult to anticipate for many reasons. Recovery is both highly complex and highly uncertain. Recovery can potentially occur at different rates and ultimately attain different stable states. The resilience of a community may change over time, affecting its ability to recover from disasters. For example, with pro-active mitigation programs, the community may increase the rapidity of its recovery, perhaps reaching a higher quality stable state. If, however, vulnerability increases (e.g., urban growth continues in high-hazard areas), recovery rapidity may slow to such a degree that a lessened stable state may be obtained relative to the community's trajectory without the disaster.

One approach to developing a more systematic understanding of disaster recovery is modeling. Taking advantage of computer-based platforms for addressing computationally complex problems, recovery models can facilitate "what-if" analyses of resilience through comparison of different pre- and post-disaster scenarios. Once a basic model of community recovery is developed, it can be used to explore the effects on recovery of alterations in specific variables of interest. This can contribute insights on what variables are most influential, what types of communities are most vulnerable, and where policy interventions may be most effective. It is especially valuable to be able to characterize the effects of different policies and management plans. Such decisions range from choosing whether to retrofit a neighborhood's gas pipelines to planning to employ short-term housing instead of temporary shelters.

Miles and Chang (2003) developed a prototype model that simulates the recovery dynamics of socio-economic agents (households and businesses), neighborhoods, and communities following a disaster. This model is distinctive in its emphasis on recovery time paths, spatial disparities, and linkages between different sectors of a community. Household recovery, for example, is influenced not only by housing damage but socio-economic attributes (e.g., income level) as well as by business recovery (as businesses provide jobs) and the loss and restoration of critical infrastructures. The computer implementation of the model is based on a robust and detailed conceptual representation that facilitates application to multiple hazards, while providing significant explanatory power for interaction with decision makers and the public.

The conceptual model provides a foundation for integrating perspectives from engineering, earth science, social science, and local communities. It describes the relationships across different scales – socio-economic agent, neighborhood and community – after an earthquake occurs (Chang and Miles, 2004). The conceptual model considers attributes and behaviors of socio-economic agents and how these affect and are affected by the built environment, policy decisions, and socio-political characteristics of a community. Modeling down to the agent scale allows risk assessment to be compatible with theories of social vulnerability and risk because it

facilitates questions about, for example, how disparities in household incomes within a community may affect differential experiences in damage, loss, and recovery.

Complex and meaningful simulations arise out of implementing the conceptual model to compute the socio-economic interactions over time across multiple scales. The conceptual model was initially implemented in MATLAB as a simple prototype with a restricted number of neighborhoods and agents (Miles and Chang, 2003). It was then expanded to facilitate application to the case of the catastrophic 1995 Kobe, Japan earthquake. The implementation restricted the number of neighborhoods that could be represented, but allowed for an unlimited number of agents in each neighborhood, with the limitation of requiring the number of agents to be equal in each neighborhood. The implemented model was subjected to extensive sensitivity analysis and evaluation with respect to the Kobe case study to assist in determining priorities for model improvement. To facilitate evaluation by practitioners, a graphical user interface (GUI) was developed to afford easier interaction with the computer model (as applied to the Kobe case study). The computer model and GUI was evaluated during a focus group that involved Puget Sound, Washington, area disaster planning and management professionals (Miles and Chang, 2006). The focus group was conducted to elicit practical insights about the recovery process and user needs to guide future model development efforts.

This report describes work subsequent to Miles and Chang (2006) in which many limitations or simplifications identified through sensitivity analysis, the focus group evaluation, and the authors' experience using the model have been addressed. Improvements to the model include revisions to the conceptual representation and the computer implementation. The most significant improvement to the conceptual representation of the model is revision of the recovery indicators (and dependent modeled variables) to be more relevant to planners' information needs, as suggested during the focus group evaluation. The computer implementation of the model has been extensively revised. The model has been augmented through development of spreadsheet-based input processing. The current computer model is now modular and fully scalable. Modularity means that different algorithms can be substituted easily without having to modify other aspects of the model. Scalability means that any number of socio-political jurisdictions, socio-economic agents and physical infrastructure elements can be represented (within limits of computer storage and processing capabilities). The modular implementation of the model means any technical modification of the model will be straightforward, after appropriate revision to the conceptual model. The scalability of the model allows for larger and more complex case applications of the model. The updated model was applied to simulate the 1995 Northridge earthquake, allowing the most extensive calibration and evaluation of the model to this point.

This report is comprised of seven chapters, including the introduction. Section 2 of this report describes model improvements with respect to the conceptual representation of recovery, and the computer implementation of the model. Application of the model to the Northridge earthquake disaster is described in Section 3. Section 4 addresses model calibration and evaluation of the co-event model, with post-event model calibration and results described in Section 5. Section 6 outlines preliminary experiments and sensitivity analysis run on the new model. Section 7 summarizes advances to date, areas for further research, and conclusions.

SECTION 2

MODEL DEVELOPMENT

The original design procedure for the recovery model of Miles and Chang (2003) consisted of conceptual model development followed by operationalization of the conceptual model as a prototype computer model. The conceptual model consists of the static and functional model. The former describes the structural relationships between objects, as well as the attributes and behaviors of each object. The functional model describes the relationship between inputs and outputs of specific object behaviors (or functions) independent of specific algorithms. (See Miles and Chang 2003 for a complete explanation of the process of design and the definitions of the static and functional models.) The conceptual model was first implemented in Microsoft Excel and then imported to MATLAB/Simulink, a time series simulation modeling software. Revisions to both the conceptual and computer implementation of the recovery model of Miles and Chang (2003) have been made. These are described in Sections 2.1 and 2.2, respectively. Discussions focus on refinements that have been made to the model.

2.1 Conceptual Model

The overall static model developed by Miles and Chang (2003), shown in Figure 2-1, remains the same. A community is conceptualized as consisting of a set of neighborhoods, each of which contains numerous households and businesses. Lifelines such as transportation networks are also contained in neighborhoods, although they function as systems across the community. The household and business agents are objects in this model. They are influenced by the earthquake (or other hazard agent) and interact with each other in the context of neighborhood and community conditions over the course of disaster recovery.

Changes to the static model largely consist of the removal and addition of attributes and behaviors to respective objects (e.g., households). With respect to lifelines, a significant structural change was made by representing each lifeline network as a collection of component objects. This replaces the previous concept that one object represents, for example, the entire transportation network.

Figure 2-2 shows a more detailed static model that reflects these collective changes, with new variables highlighted. Variable definitions, many of which have been revised, are given in Table 2-1. The majority of the attributes that have been removed from the conceptual model are the default driving variables, associated with an implementation technique no longer employed (described below). The model no longer employs agent variables that represent generic recovery (i.e., RECb, RECh). Instead, several more conceptually meaningful variables are used, which are described in more detail below.

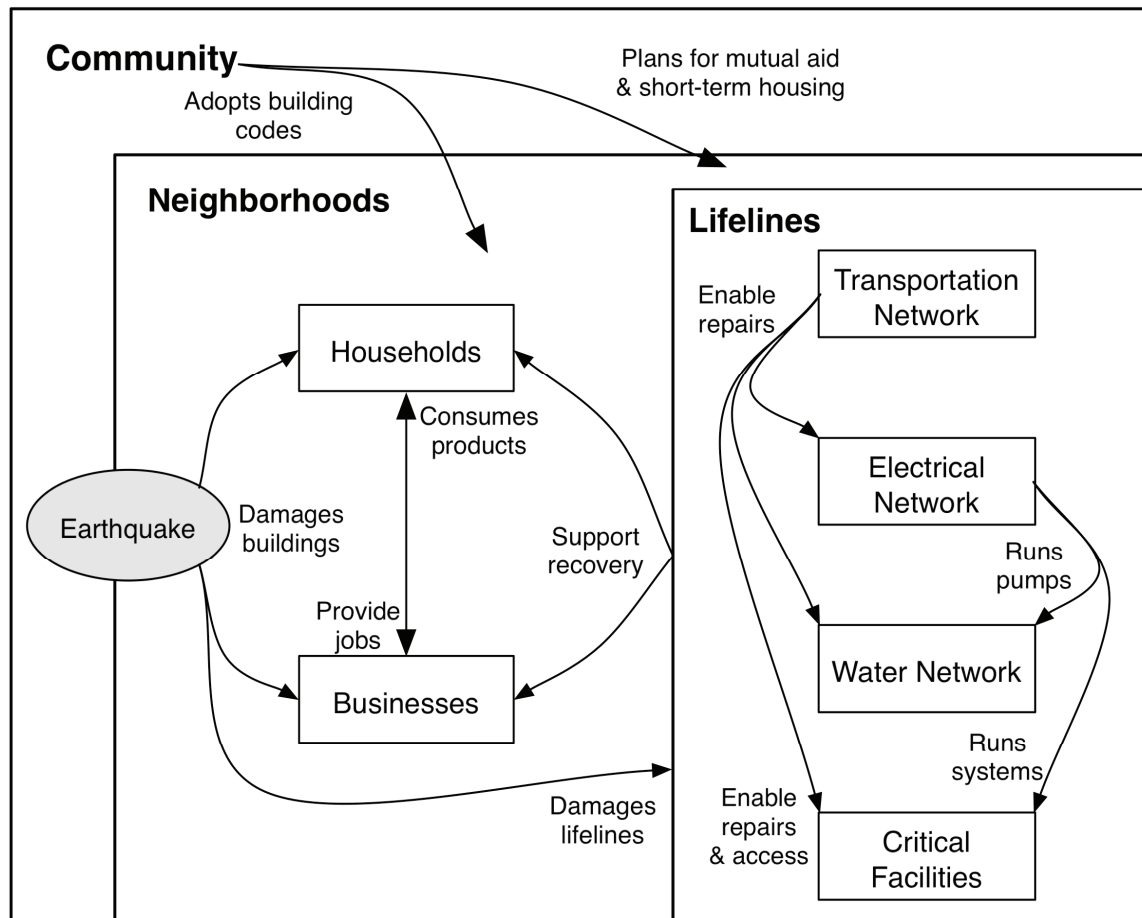


Figure 2-1 Generalized static model of community recovery from disasters

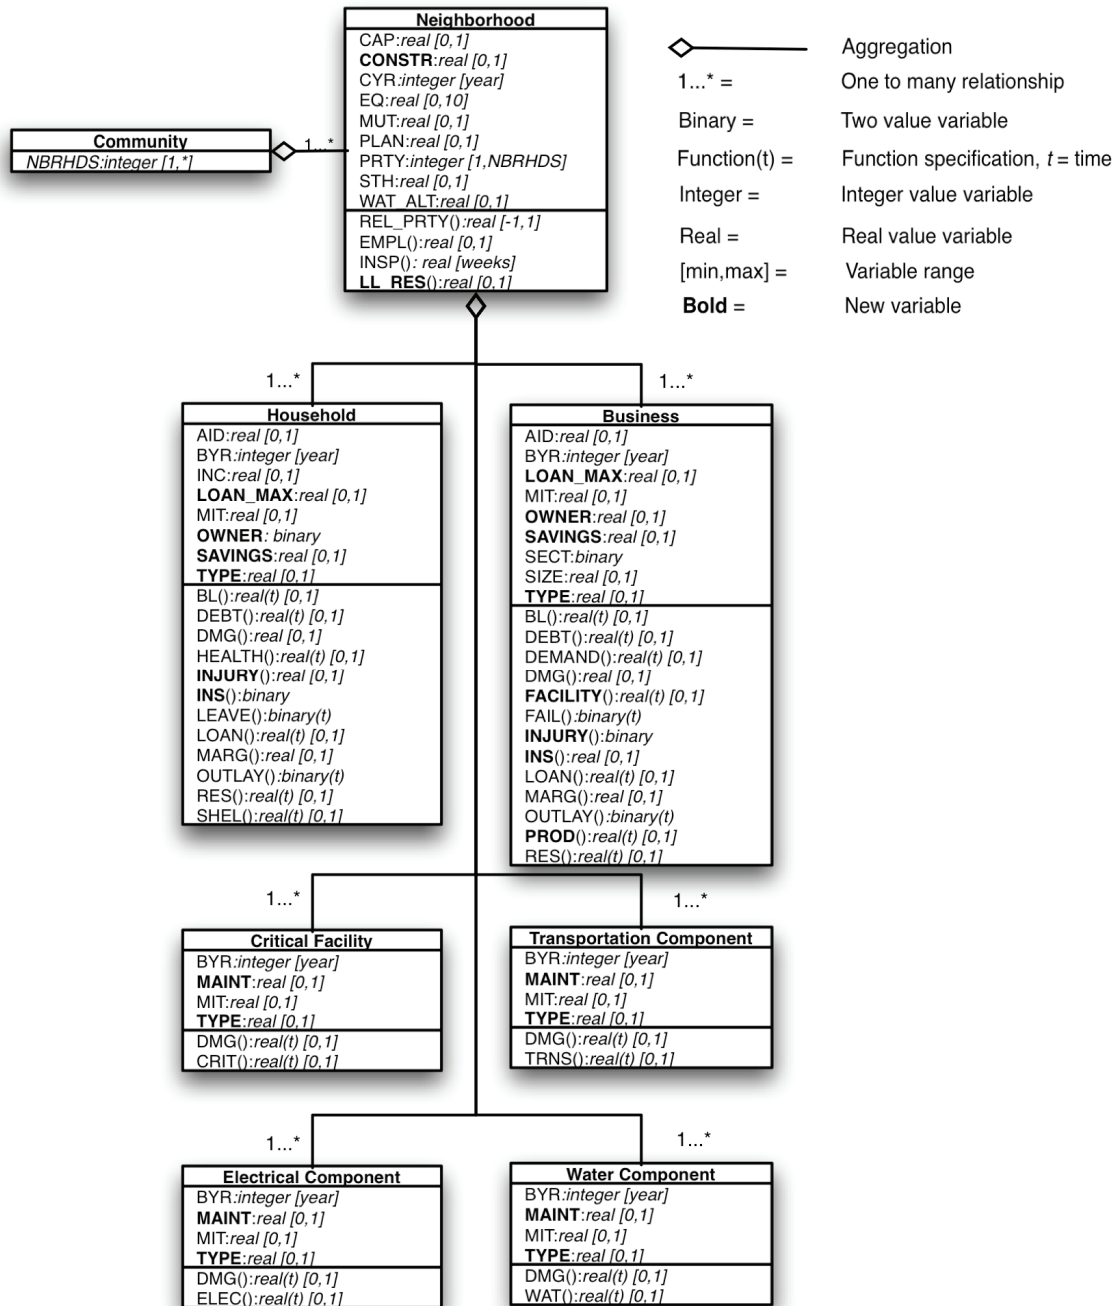


Figure 2-2 Detailed static model of community recovery from disasters.

(New variables in bold. Variable definitions given in Table 2-1)

Table 2-1 Variable definitions for recovery model

AID	= Normalized post-event grant amount.
BL	= Ratio of resources (materials, labor etc.) expended in reconstruction to building replacement value. Alternatively, percent to which reconstruction is complete. 0 to 1, with 1 being reconstructed.
BYR	= Year building or lifeline component built.
CAP	= Recovery capacity of community (proxy for integration and consensus). 0 to 1, with 1 being highest capacity.
CONSTR	= construction capacity of community.
CRIT	= Probability that component is fully reconstructed.
CYR	= year seismic code effective
DEBT	= Normalized level of debt. The inverse of LOAN.
DEMAND	= Post-event demand for product. 0 to 1, with 1 indicating pre-event demand level.
DMG	= Damage of building expressed as ratio of building replacement value.
ELEC	= Probability that component is fully reconstructed.
EMPL	= Probability that employment is available.
EQ	= Severity of earthquake's physical effects. 0 to 10, Conceptually equivalent to ShakeMap intensity/MMI
FACILITY	= Service level of a business's facility. 0 to 1, with 1 indicating operation at pre-event service level.
FAIL	= Occurrence of business failure ($Y(1)/N(0)$)
HEALTH	= Probability that household is healthy
INC	= Normalized annual income.
INJURY	= Probability that household health or business demand has been injured.
INS	= Whether or not an agent has insurance.
INSP	= Time in weeks after event that safety inspections are completed.
LEAVE	= Whether or not household has left region.
LL_RES	= Overall lifeline restoration resources available in the neighborhood.
LOAN	= Normalized amount of reconstruction loan taken out. Implicitly related to DMG.
LOAN_MAX	= Limit on post-event loan amount.
LOAN_TIME	= Time in weeks after earthquake that loan is disbursed.
MAINT	= Probability that component has been well-maintained.
MARG	= Pre-event financial marginality.
MIT	= Pre-event structural mitigation of building or lifeline component. Currently 1 (maximum) indicates a 25% increase is fragility curve median.
MUT	= Provision for mutual aid in lifeline restoration. 0 to 1, with 1 equal to maximum construction resources without mutual aid (i.e., MUT can at most double construction resources)
NBRHD	= Number of neighborhoods.
OUTLAY	= Whether or not an agent has received an insurance payment. 1 is implicitly defined as the replacement value of their building.
OWNER	= Whether or not a household owns their residence.
PLAN	= Probability of an effective restoration plan.
PROD	= Probability that business is at pre-event production level.
PRTY	= An absolute score given at the neighborhood level, indicating priority. The score can range from NBRHD (number of neighborhoods) to 1, with higher numbers indicating higher priority.
REL_PRTY	= a relative score (-1 to 1) calculated at the neighborhood level, indicating actual inspection priority
RES	= Normalized total financial resources.
SAVINGS	= Normalized savings or assets.
SECT	= Type of business sector (0:local or 1:export).
SHEL	= Probability that household has adequate shelter and associated services.
SIZE	= Normalized number of employees.
STH	= Probability that short-term housing is available, Y/N.
TRNS	= Probability that component is fully reconstructed.
TYPE	= Type of building or lifeline component—a proxy for size and/or complexity for reconstruction. 0 to 1, with 1 indicating largest or most complex building/component type.
WAT_ALT	= Provision for alternate water sources (water trucks) for neighborhood. 0 to 1, with 1 being equivalent to maximum total water service in neighborhood ($WAT_n = 1$)
WAT	= Probability that component is fully reconstructed.

Notes: Object attributes (exogenous variables) in bold. Decision variables in bold underline.

Revision of model variables led to a need to revise the functional model, which describes how outputs are related to inputs. Also, to simplify interpretation and management of the model, an effort was made to reduce the number of times the same variable is a direct input to multiple functions. That is, if a variable is an input to function A and function B, and function B is also dependent on the output of function A, the variable was removed from function B unless there was a strong conceptual reason not to do this. The revised functional dependencies are given in Table 2-2.

2.1.1 Agent Recovery Concepts

The generic (aggregated) recovery variable used for agents in the previous version of the model has been dropped. Instead two indicators for business and household agents represent recovery, each having a more concrete real-world analog. The agent recovery indicators are based on general concepts: (1) ability to perform and (2) opportunity to perform. These concepts are influenced by an agent's shelter/facility service level, as well as their financial debt. In turn, the opportunity and ability to perform influence whether an agent is forced to fail/leave. The specific variables for households and businesses are described below. As part of this revision to the recovery variables, the model no longer represents recovery as four distinct stages.

2.1.2 Household Recovery

For households, the ability to perform is represented by household health (HLTH). Among other variables, health is directly influenced by availability of critical facilities (CRIT) and serviceability of shelter (SHEL, either their own residence or short-term housing). Shelter serviceability is influenced not only by residence reconstruction (BL), but availability of lifeline services (WAT and ELEC). Reconstruction time is now influenced by the size (TYPE, single-family vs. multi-family) of the respective building in addition to the construction capacity in the community (CONSTR). Reconstruction can only begin after inspections have been completed in the neighborhood (INSP), which is influenced by the quality of the preparedness plan, the recovery capacity of the community (CAP), and the neighborhood's priority (PRTY). Health influences a household's ability to pay off any incurred debt (DEBT). The current version of the model accounts for whether or not a household owns their residence (OWNER) so that if they do not, they do not incur debt with respect to any reconstruction loans. The opportunity to perform is represented by employment level in their neighborhood and broader community (EMPL). Employment influences a household's opportunity to pay off any incurred debt. Debt is one of the main influences of whether a household is forced to leave their neighborhood (LEAVE).

Table 2-2 Functional dependencies between variables of the recovery model

Community/Neighborhood

REL_PRTY = f(PRTY, NBRHDS)
 INSP = f(EQ_AVG, PLAN, CAP, REL_PRTY)
 LOAN_TIME = f(EQ_AVG, PLAN, CAP, REL_PRTY)
 NBRHD_EMPL = f(PROD_n, DEM_n)

Businesses

DMG = f_{cdf}(SAVINGS, BYR, BMIT, CYR, EQ)
 INJURY = f_{cdf}(SIZE, EQ)
 MARG = f_{rand}(SIZE)
 INS = f_{rand}(OWNER, SIZE)
 OUTLAY = f(INS, INSP)
 LOAN = f(OUTLAY, DMG, LOAN_TIME, MARG, LOAN_MAX, AID)
 LOAN_TIME = f(INSP)
 RES = f(LOAN, AID, SAVINGS, OUTLAY)
 BL = f_m(INSP, RES, BTYPE, CONSTR)
 FACILITY = f(ELEC_n, BL)
 PROD = f_m(FACILITY, TRNS_n, TRNS_c, SIZE, HEALTH_c, FAIL)
 DEM = f_m(SECT, DEBT_c, DEBT_n, SIZE)
 DEBT = f(DEM, SIZE, LOAN, PROD, LOAN_TIME, FAIL)
 FAIL = f_m(FACILITY, DEM, DEBT, PROD)

Households

DMG = f_{cdf}(SAVINGS, BYR, MIT, CYR, EQ)
 INJURY = f_{cdf}(INC, DMG)
 MARG = f_{rand}(INC)
 INS = f_{rand}(MARG, INC, OWNER)
 OUTLAY = f(INS, INSP)
 LOAN = f(OUTLAY, DMG, LOAN_TIME, MARG, LOAN_MAX, AID)
 LOAN_TIME = f(INSP)
 RES = f(LOAN, AID, SAVINGS, OUTLAY)
 BL = f_m(INSP, RES, BTYPE, CONSTR)
 SHEL = f(STH, ELEC_n, WAT_n, BL)
 HEALTH = f_m(CRIT_n, RES, SHEL, LEAVE)
 DEBT = f(HEALTH, INC, LOAN, NBRHD_EMPL, LOAN_TIME, LEAVE)
 LEAVE = f_m(SHEL, HEALTH, DEBT, NBRHD, EMPL)

Lifelines

DMG = f_{cdf}(MAINT, CRIT_BYR, CRIT_MIT, CYR, EQ)
 LL_RES = f(MUT, CONST, PLAN, CAP, PRTY, NBRHDS)
 CRIT = f_m(CRIT_TYPE, LL_RES)
 TRNS = f_m(TRNS_TYPE, LL_RES)
 ELEC = f_m(ELEC_TYPE, LL_RES, TRNS_c)
 WAT = f_m(WAT_TYPE, WAT_ALT, LL_RES, TRNS_c, ELEC_n)

Notes: n — variable averaged over the neighborhood. C — variable averaged over the community. f_{cdf} - Function implemented using lognormal cumulative distribution function fragility curve(s). f_{rand} - Function implemented using uniform random number generator. f_m - Function implemented as a Markov Chain.

2.1.3 Businesses Recovery

For businesses, the ability to perform is represented by a business's capacity to be productive (not necessarily economic productivity or throughput) (PROD). The service level of a business's physical facility (FACILITY) influences this capacity, which is in turn influenced by a combination of reconstruction (BL) and lifeline service restoration (WAT and ELEC). Reconstruction time is now influenced by the complexity or size of the respective facility (BTTYPE), in addition to the construction capacity in the community (CONSTR). Reconstruction can only begin after inspections have been completed in the neighborhood (INSP), which is influenced by the quality of the preparedness plan (PLAN), the recovery capacity of the community (CAP), and the neighborhood's priority (PRTY). The ability to perform is also influenced by the community-wide health level of households and by the transportation network reconstruction level (TRNS) (within the neighborhood if the business's sector (SECT) is locally oriented, or throughout the community if the sector is export-oriented). A business's ability to perform influences its ability to pay down any debt (DEBT). Similarly to households, businesses do not incur debt from reconstruction loans if they do not own their facility (OWNER). The opportunity to perform is represented by the demand for a business's product or services (DEMAND). Recovery of demand is influenced by some proportion of household debt within the respective neighborhood or the entire community, depending on the business's size (SIZE). Demand influences a business's opportunity to pay down any incurred debt, which in turn influences whether the business fails (FAIL).

2.1.4 Agent Financial Resources

The ability of an agent to reconstruct their residence or facility is influenced by their financial resources (RES). In the previous version of the model, this variable was not a simple aggregation of distinct financial resources. In the current model, however, it is the sum of insurance (INS), reconstruction loans (LOAN), disaster aid in the form of grants (AID), and pre-event savings (SAVINGS). In the previous version of the model there was no representation of grants; AID was conceptualized in the previous version as indicating the availability of loans. If the agent owns their building or facility, the maximum level of financial resources is implicitly related to the value of the building or facility. Whether or not an agent has insurance (and what amount) is now conceptually distinct from when the insurance is outlaid (OUTLAY). All elements of the financial resources are agent-specific, however a maximum value for loans (LOAN_MAX) can be specified at any resolution from agent-specific to community-wide.

2.1.5 Lifeline Restoration

To facilitate eventual representation of service outage for critical facilities, electricity, transportation, and water, all lifelines are represented as a set of components. Each component has values for attributes of construction age, maintenance level, component type, and degree of structural mitigation. In the previous version, lifelines were represented in aggregate at the neighborhood scale, having only a neighborhood-wide attribute of structure mitigation level. Currently, the model conceptually equates lifeline service restoration and lifeline component reconstruction for critical facilities, electricity, transportation, and water networks (CRIT, ELEC, TRNS, WAT). The time in which a particular lifeline component is reconstructed is influenced

by new variables—the particular type of component (e.g., transformer vs. power line) (TYPE) and the overall lifeline restoration resources (LL_RES) available in the neighborhood. The neighborhood lifeline restoration resources is influenced by to the construction capacity in the community (CONSTR), the quality of the preparedness plan (PLAN) and mutual aid agreement (MUT), the recovery capacity of the community (CAP), and the neighborhood’s priority (PRTY).

2.2 Improved Implementation

A majority of the work in revising the recovery model consisted of changes to the implementation of the conceptual model. Implementation refers to both the algorithms used in specifying the functional dependencies of the conceptual model and software design (in this case within MATLAB). A significant number of software design changes were made, including splitting the model into two (co-event and post-event models), making the model modular and scalable, and facilitating model inputs using Microsoft Excel files. From the standpoint of algorithm implementation, the most significant change is dropping use of several deterministic “driving variables”—simple linear equations used to create the dynamics of the simulation—thereby eliminating the majority of the arbitrarily defined multivariate polynomial equations. This change was accomplished through use of Markov chain modeling (described further below). The other significant algorithm implementation change was made in the use of fragility curves to calculate damage and injury (a new variable). The implementation improvements lead an (intended) improvement in how hazards are represented in the model. Each of these improvements is described in turn below.

2.2.1 Software Design Revisions

Both conceptually and as implemented, the model separates representation of pre-event/co-event dynamics from post-event dynamics. One advantage of this is that a series of events can be simulated by linking several co-event and post-event models. The co-event model simulates a series of variables that relate to conditions prior to and immediately following the earthquake. This includes an agent’s pre-event financial marginality (MARG) and whether an agent has insurance at the time of the event. For household agents, the immediate effect of the hazard event on health (household injury) is simulated. For business agents, the immediate effect of the event on business demand is simulated. For all agents and all lifelines, damage to built infrastructure (i.e., buildings or lifeline components) is simulated. The post-event model simulates variables relating to conditions over time as the community and its constituent agents and elements recover in the weeks and months following the disaster. This includes restoration of built infrastructure with respect to agents and lifelines, as well as the various recovery indicators (and intermediate variables) described above.

All major conceptual or implementation features of the model have been encapsulated in separate Simulink models. Beforehand, the recovery model was one large Simulink model (though graphically organized by features). The model is now truly modular, meaning that the method in which a particular model is implemented can be changed without affecting compilation of the overall (co-event and post-event) model. Further, the modularity facilitates

substituting a data source for a model reference. For example, rather than modeling lifeline restoration, actual lifeline restoration time-series data can be used.

The model now supports any number of neighborhoods, with each neighborhood having any number of agents. The number of neighborhoods was hard-coded in the previous version of the model. The previous version of the model also required that all neighborhoods have the same number of businesses and households (e.g., all neighborhoods had to have both 100 households and businesses). As implemented now, the number of neighborhoods and agents is determined by the input data. That is, at run-time, the model allocates arrays to match the number of neighborhoods and agents for which there is data. This revision should facilitate implementation of agent migration features into the model in future.

To facilitate the compilation of larger input data sets, a data input tool has been built to input data from Microsoft Excel for running the model. The input data can be specified as MATLAB workspace variables or can be imported (using the new tool) from a series of Excel files. Seven Excel files are required to describe, respectively, (1) community-wide and policy variables for each neighborhood, (2) households and their attributes for each neighborhood, (3) businesses and their attributes for each neighborhood, and (4~7) the components of each respective lifeline (critical facilities, electrical network, transportation network and water network) and associated attributes for each neighborhood.

2.2.2 Algorithm Implementation Revisions

For all dynamic functions (sub-models), except for the function for calculating debt, Markov chains have replaced the use of “driving variables.” So rather than most variables serving to influence the default driving variable (slope value and intercept), most variables are treated as probabilities. For a particular dynamic output then, each state is calculated as a comparison between a uniform random number and the aggregation of all input variables (probabilities). Functions for which Markov chains have been implemented include building and lifeline component restoration, health recovery, business demand recovery, business production recovery, and whether an agent leaves/fails.

Currently the model is specified with a set of four fragility curves that relate MMI or the USGS TriNet ShakeMap shaking intensity scale (0 to 10) to four levels of building and lifeline component damage (25%, 50%, 75%, 100%) (DMG). Because of its role in determining loan (LOAN) amounts, DMG is implicitly the ratio of damage cost to the total replacement value. (To be consistent, damage to lifeline components can be conceptualized similarly, though there are not parallel concepts of loans and insurance for lifelines in the model.) Each fragility curve is a lognormal cumulative distribution function. The fragility curves representing the four damage levels differ by the respective median and variance. The median values for each agent are determined by their building age (CYR vs. BYR) and building/facility type for households and businesses. Currently, the median values for respective lifeline components are determined by the component’s age and level of maintenance (MAINT). Modeled damage level is equal to the highest damage level in which the probability for a given shaking intensity exceeds a normally distributed random number. Structural mitigation of buildings/facilities and lifeline

components is now represented as a uniform increase in the median value of each damage level's fragility curve. Currently, the maximum increase in median value is 25%.

The effects on agents' well being is also determined using fragility curves. However, in this case only one fragility curve is used (that is, not one for each level). The immediate post-event household health state is determined by the calculated injury level (INJURY). The fragility curve for household injury is a lognormal cumulative distribution function that relates building damage to injury probability. The median of the fragility curve increases with increasing household income (INC). That is, increasing income levels will result in lower probability of injury. The immediate post-event business demand level is determined as the "injury" to a business's demand (INJURY). The fragility curve for business demand reduction is a lognormal cumulative distribution function that relates shaking intensity to demand reduction probability. The median of the fragility curve increases with increasing business size. That is, increasing business size will result in lower probability of reduced demand for product/services.

In the previous version of the model, earthquake shaking intensity was represented on a scale from 0 to 1. Now the representation of generic hazard is controlled by the use of fragility curves. This means that the form of the model's fragility curves dictates the units and scale of input data describing the hazard. The hazard now can be represented at the agent and lifeline component scale. While the model still represents the location of agents at the spatial resolution of neighborhoods, representing the hazard by agents facilitates representation of a wider spectrum of hazard scenarios. For example, a terrorist attack may target all very large, export-oriented businesses or, alternatively, all major transportation network components. (Note that input data tools and input-output operations for this have not been developed, but the model implementation does currently allow for it.) Increased spatial resolution is facilitated in the current version of the model by allowing for an unlimited (within the constraints of MATLAB) number of "neighborhoods" (spatial units). With such a resolution, for example, the confined pattern of a flood can be represented.

Now multiple hazard events can be represented over time by arranging a series of Co-Event/Post-Event Model runs. For example, the effects of a main shock earthquake can be modeled, followed by recovery modeling for, say, four weeks, followed by the modeling of the effects of an aftershock and subsequent recovery. (Again, the data input tools and input-output operations have not been developed for this, but the implementation allows for it.) In this way, small intensity, long duration events can be represented the model.

SECTION 3 NORTHRIDGE APPLICATION

The previous versions of the recovery model have been applied to a fictional city (Chang and Miles, 2004) and Kobe, Japan (Miles and Chang, 2006) for the purposes of evaluating and calibrating the model. The revisions to the model make it necessary to evaluate and calibrate the model again. We chose to apply the recovery model to the 1994 M=6.7 Northridge, California earthquake, which in terms of financial losses is still one of the worst disasters in United States history (Petak and Elahi, 2001). Moreover, among U.S. earthquakes, this is probably the best-documented and most thoroughly studied. In applying the previous version of the model to Kobe, Japan, large simplifications were required in representing the disaster because of limitations of the model. However, the amount and quality of data available on the recovery of Kobe made these simplifications worthwhile. Now that the model can handle any number of neighborhoods, agents, and lifeline components, application to Northridge (and the higher volume and quality of associated data and information) makes more sense.

The model was applied to the City of Los Angeles, California, which included the areas of highest shaking intensity and greatest loss. Application of the model consists of developing datasets to parameterize each of the endogenous inputs listed in Table 2-1, as well as running the model—specifically, the co-event and post-event models. Nine neighborhood level variables had to be parameterized (CAP, CONSTR, CYR, EQ, MUT, PLAN, PRTY, STH, WAT_ALT). All but EQ was assumed to be the same value inside the Los Angeles city boundary. Based on a review of the literature, the maximum value (1) was assigned to the variables representing the recovery capacity (CAP), construction capacity resources (CONSTR), the effectiveness of mutual aid (MUT), the quality of a pre-disaster plan (PLAN), and the use of short-term housing (STH). Recovery capacity and general preparedness was high because of previous earthquakes in Southern California, such as the 1971 San Fernando earthquake. The pre-disaster plan had been adopted soon before the Northridge earthquake (Wu, 2003). For short-term housing, high apartment vacancy rates allowed effective use of rent vouchers to provide housing (Loukaitou-Sideris and Kamel, 2004; McCarty et al., 2005). Mutual aid was either in place or set in motion with respect to at least emergency management, water network repair, and building inspection (Comfort, 1994; EQE, 2001, Loukaitou-Sideris and Kamel, 2004). To our knowledge, no major alternative water source (WAT_ALT) was employed after the earthquake to aid recovery. We chose to set the building code year (CYR) as 1976, reflecting the major improvements in building standards that were in place by that time as the result of the San Fernando earthquake. Data characterizing earthquake ground shaking (instrumental intensity) for the Northridge earthquake were gathered from the USGS TriNet ShakeMap system, clipped to the boundary of Los Angeles, and averaged for each neighborhood unit (defined below).

In general, data describing agent demographics and the lifeline system had to be gathered and processed for input into the model, in addition to data describing the spatial distribution of ground shaking severity. Demographic data describing attributes of households and businesses were developed based on gathered census information and, for variables lacking adequate primary data, data simulation. The components for modeling lifeline recovery were not evaluated as part of this study. Instead, time series data describing the restoration of service for each lifeline type was developed and used directly as input to the recovery model. This facilitated

focusing on the household and business aspects of the model, while demonstrating the modularity of the model—in this case, substituting data for model components. Data processing for application of the recovery model was done using geographic information systems (GIS) and spreadsheet software. An overview of data sources used for the Northridge application is given in Table 3-1. Specific data development for the agent demographics and lifeline system attributes are described in the following two sections.

Table 3-1 Overview of major data sources for Northridge application

Feature	Data Sources
Northridge earthquake ground motion	US Geological Survey TriNet ShakeMap, http://earthquake.usgs.gov/eqcenter/shakemap/sc/shake/Northridge/
Boundaries <i>Los Angeles Community Planning Areas</i> <i>Public Use Microdata Units</i> <i>Zip Code Areas</i>	Department of City Planning, City of Los Angeles (email request) University of Minnesota Population Center's Integrated Public Use Micro Data, http://usa.ipums.org/usa/ US Census Bureau Zip Code Tabulation Areas, http://www.census.gov/geo/www/cob/z52000.html
Household demographics	University of Minnesota Population Center's Integrated Public Use Microdata Series, http://usa.ipums.org/usa/
Business demographics	U.S. Census Zip Code Business Pattern Standard Industrial Classification, http://censtats.census.gov/cbpsic/cbpsic.shtml
Lifelines	Various secondary literature sources (described below)


3.1 Agent Demographics

Demographics for both households and businesses were characterized using information from the US Census Bureau. However, the resolution, detail, and direct sources of the data differed dramatically. Household data available at the census tract level is an average of individual census survey response (to maintain anonymity). The recovery model requires data about specific households and their attributes. We chose therefore to use 1990 Public Use Microdata 5% State Sample from the University of Minnesota Population Center's Integrated Public Use Microdata Series (PUMS) (originally collected by the US Census Bureau). This data set provides individual records of households from a 1-in-20 national random sample of the census population for areas no smaller than 100,000 people. These areas are referred to as PUMAs (Public Use Microdata Areas).

There are 21 PUMAs within the City of Los Angeles. Thus, the number of neighborhoods represented in the recovery model corresponds to the 21 PUMAs in Los Angeles. A map showing the L.A. PUMAs and their relation to the L.A. Community Planning Areas (i.e., official neighborhoods) is given in Figure 3-1. The sample size across these PUMAs consisted of a total of 67,440 households (Figure 3-2).

For businesses, data readily available through the US Census is much less detailed and is provided for different spatial units than data available for households. We used 1994 Zip Code Business Patterns data for parameterizing the model. These data describe the number of different businesses by size in each Standard Industrial Classification sector. The data were aggregated within each PUMA to provide a common spatial unit of analysis with the household demographics. The total number of businesses in Los Angeles represented by this data is 102,684 (Figure 3-2). Note that unlike the household data, this data is not a sample of the population, but rather represents the entire population. However, the data may undercount the number of small businesses.

For both households and businesses, the available data did not cover all agent-attribute variables of the recovery model, requiring some data to be simulated for the purpose of parameterizing the model. Also, all demographic data required some processing—even if data existed for a particular variable—to translate the data into the units of analysis required by the model (i.e., most variables have a maximum value of 1 and a minimum of 0, requiring some normalization). The development and distribution of data describing each household and business variable within the recovery model is discussed, respectively, in the following sub-sections.

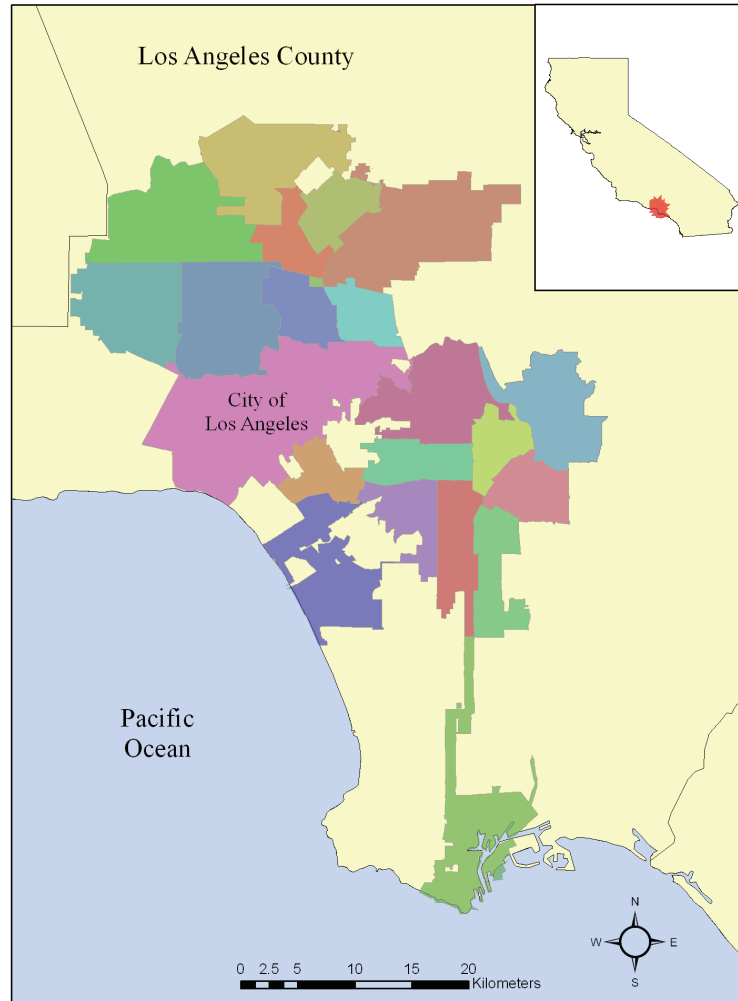

PUMA Units: Community Planning Areas

- 6501: Northeast Los Angeles
- 6502: Boyle Heights, Central City, Central City North
- 6503: Southeast Los Angeles
- 6504: West Adams, Baldwin Hills, Leimert
- 6505: South Los Angeles
- 6506: Wilshire
- 6507: Hollywood
- 6508: Westlake
- 6509: Bel Air, Beverly Crest, Brentwood, Pacific Palisades
- 6510: North Hollywood, Valley Village
- 6511: Arleta, Pacoima
- 6512: Van Nuys, North Sherman Oaks
- 6513: Mission Hills, Panorama City, North Hills
- 6514: Sunland, Tujunga, Lake View Terrace, Shadow Hills, East La Tuna Canyon, Sun Valley, La Tuna Canyon
- 6515: Granada Hills, Knollwood, Sylmar
- 6516: Canoga Park, Winnetka, Woodland Hills, West Hills
- 6517: Northridge, Chatsworth, Porter Ranch
- 6518: Reseda, West Van Nuys, Encino, Tarzana
- 6519: Westwood, West Los Angeles
- 6520: Westchester, Playa del Rey, Venice, Palms, Mar Vista, Del Rey
- 6521: San Pedro, Wilmington, Harbor City, Harbor Gateway

Figure 3-1 Map showing Public Use Microdata Units for the City of Los Angeles—the neighborhood unit for application of the recovery model

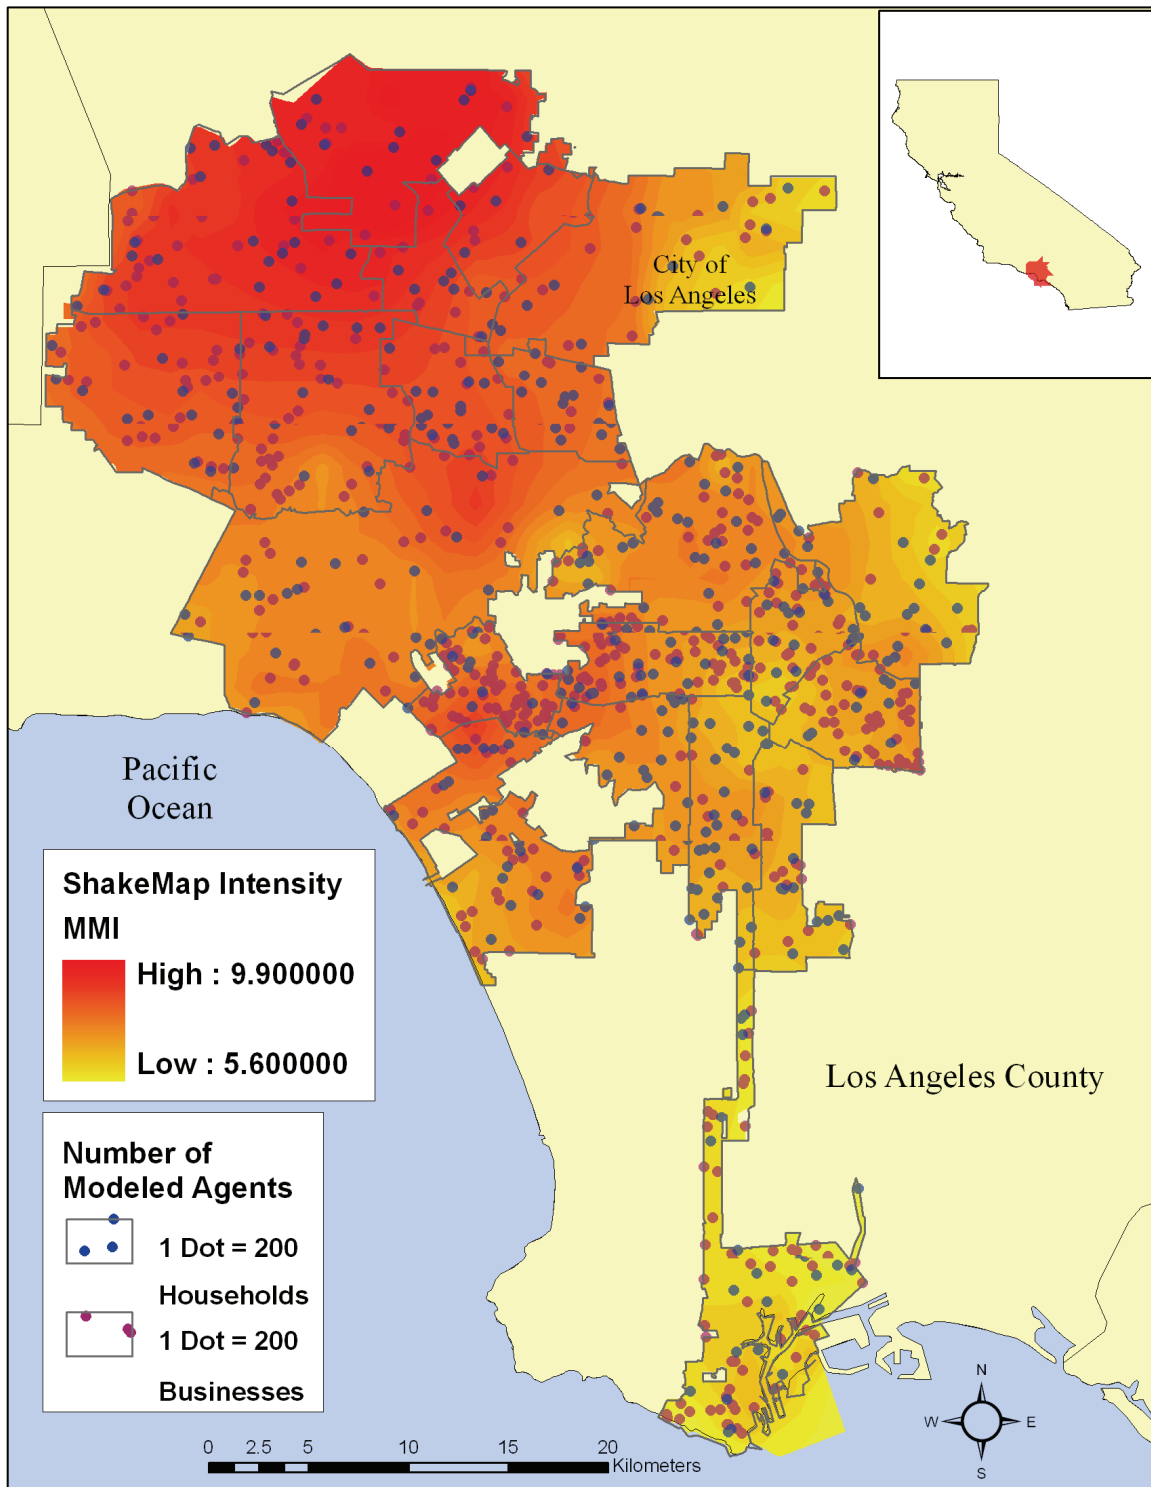


Figure 3-2 Map showing number of Los Angeles businesses and households modeled for application to the Northridge earthquake. Household data is based on the 1990 census; business data is based on the 1994 economic census

3.2 Households

From the PUMS dataset, there were data available to directly describe several attributes of households: income (INC), building year (BYR), building size (TYPE), and ownership (OWNER). For parameterizing INC, each income value (in dollars) was normalized by the 95th percentile income of the Los Angeles, which was calculated to be \$125,000, to get income values that ranged from 0 to 1 (incomes greater than \$125,000 were assigned a value of 1). Figure 3-3 shows a map of the distribution of high versus low incomes across Los Angeles. For the map, high income is defined as greater than half the 95th percentile income. Data describing whether the household owned their residence was translated such that a household that owned their residence had OWNER=1, while a household that didn't had OWNER=0. Spatial distribution of residence ownership is shown in Figure 3-4. Data describing the age of the building in which the household resided was available from the PUMS dataset, but the ages were given as ranges (e.g., 2 to 5 years old). To translate this data into an estimation of the year the structure was built, the minimum age value for each range was subtracted from 1990 (the census year). No residences newer than 1990 were represented in the simulation of the 1994 Northridge disaster. The lack of residences newer than 1990 has little effect because the model uses BYR to compare to see if it exceeds the code year (CYR), which for this application was set to 1976. The variable TYPE was parameterized using data on the number of units in the structure in which the particular household resides. The PUMS data describes whether a structure is a single-family house or one of six sizes of multi-family building (2, 3-4, 5-9, 10-19, 20,-49, and 50+ family units). A single-family home was assigned a TYPE=0, while multi-family buildings were assigned a value corresponding to the minimum number of units in the particular range divided by 50 (the maximum number of units). Figure 3-5 shows a map of the proportion of single- versus multi-family buildings in each LA PUMA.

The PUMS dataset did not provide data describing household savings (SAVINGS), structural mitigation (MIT), aid amount in the form of grants (AID) given to each household after the earthquake, or the post-earthquake loan amount provided to each household. Household savings was estimated by subtracting annual costs tracked by the census (e.g., rent/mortgage, utilities, etc.) from the household's annual income and divided by the value of the house. For renters, SAVINGS=0 was assigned, which is intended to represent that multi-family building residents or owners are unlikely to use personal savings to pay for reconstruction.

No data (that we're aware of) exists on the degree to which each residence had been structurally retrofitted at the time of the Northridge earthquake. Thus, we simulated this data based on data from the PUMS dataset, with the general assumption that very large residences were more likely to have been retrofitted. The simulation algorithm used a random inverse normal distribution (i.e., enter a uniform random number as the probability into a normal curve to get the simulated value). If a structure had 10 or more units, we assumed the average MIT=0.5 with a variance of $(1-INC)*(1990-BYR)$. This reflects a decreasing chance and quality of mitigation with decreasing income, combined with an increasing chance with increasing building age. For buildings with less than 10 units, we assumed the mean MIT=0 (no retrofit) with a variance of $INC*(1990-BYR)$. This reflects increasing likelihood and quality of mitigation with increasing income, combined with an increasing chance with increasing building age. Figure 3-6 shows the

modeled proportion of households with high versus low levels of structural mitigation done to their residence.

The amount of post-earthquake grant and loan assistance available to households was estimated based on requirements set out by the Federal Emergency Management Agency (FEMA) and the Small Business Association (SBA) after the Northridge earthquake. For grant assistance, no funds were available to households that didn't own their residence. This is both due to the fact that renters would obviously not be given assistance to rebuild their residence and that, at the time, only loans were available to apartment owners for reconstruction assistance (Tierney, 1995; Johnston, 2000). For households that owned their residence, the maximum grant amount was set at \$22,200, which is the sum of available grants from FEMA's homeowner's grant programs (Loukaitou-Sideris and Kamel, 2004). For input into the model AID was set equal to this amount normalized by the value of the household's home. Within the model, the grant amount actually disbursed to households is based on the cost of damage to the house—each household is not necessarily given the maximum grant amount. The maximum available loan amount was also estimated differently for renters and owners. For renters, because the maximum amount that SBA would provide apartment owners—\$1.5 million (Johnston, 2000) —exceeded the top code of the census data on building value (\$999,999), LOAN_MAX=1 (Loukaitou-Sideris and Kamel, 2004). In reality, of course, the loan would be given to the owner of the building, not to the renter, but the recovery model does not currently represent this level of detail for rental units (including tracking what agents live in the same building). For owners, the maximum available loan was \$200,000 (Loukaitou-Sideris and Kamel, 2004), which, for input into the model, was normalized by the value of their building.

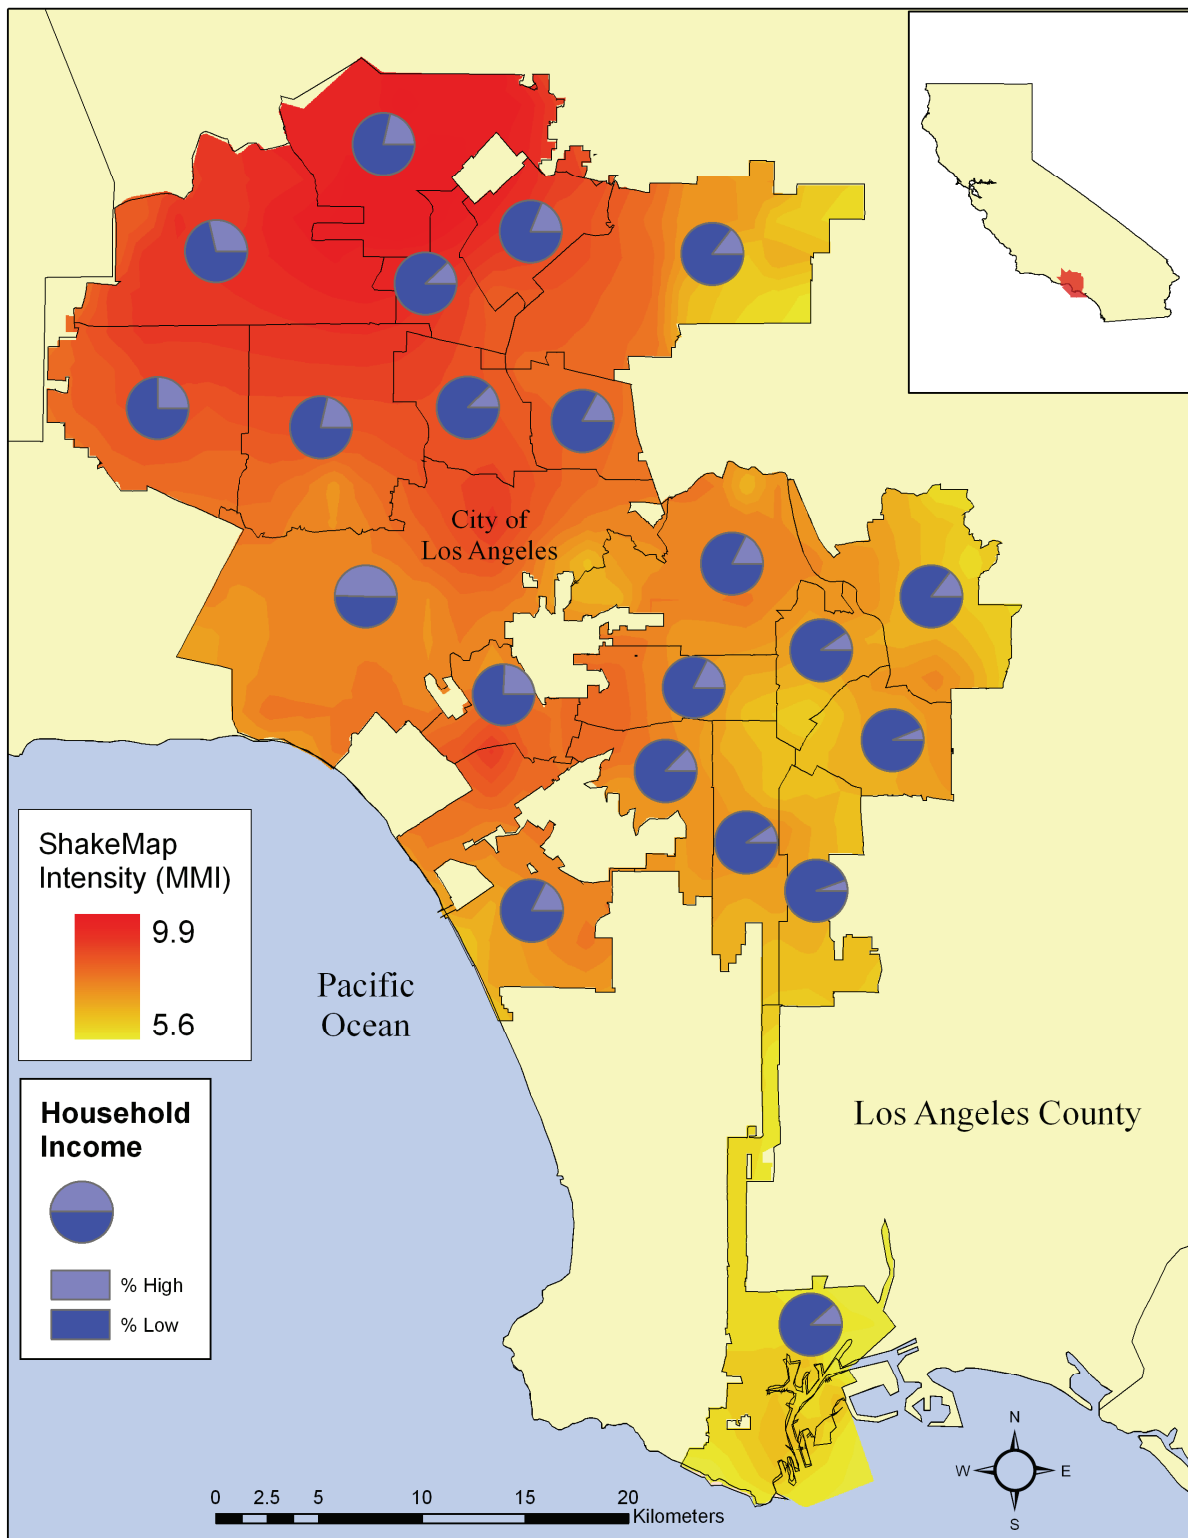


Figure 3-3 Proportion of higher and lower income households. The threshold is $INC = 0.5$ or \$62,500 (half of the 95th percentile income of the area in 1990), based on the 1990 census

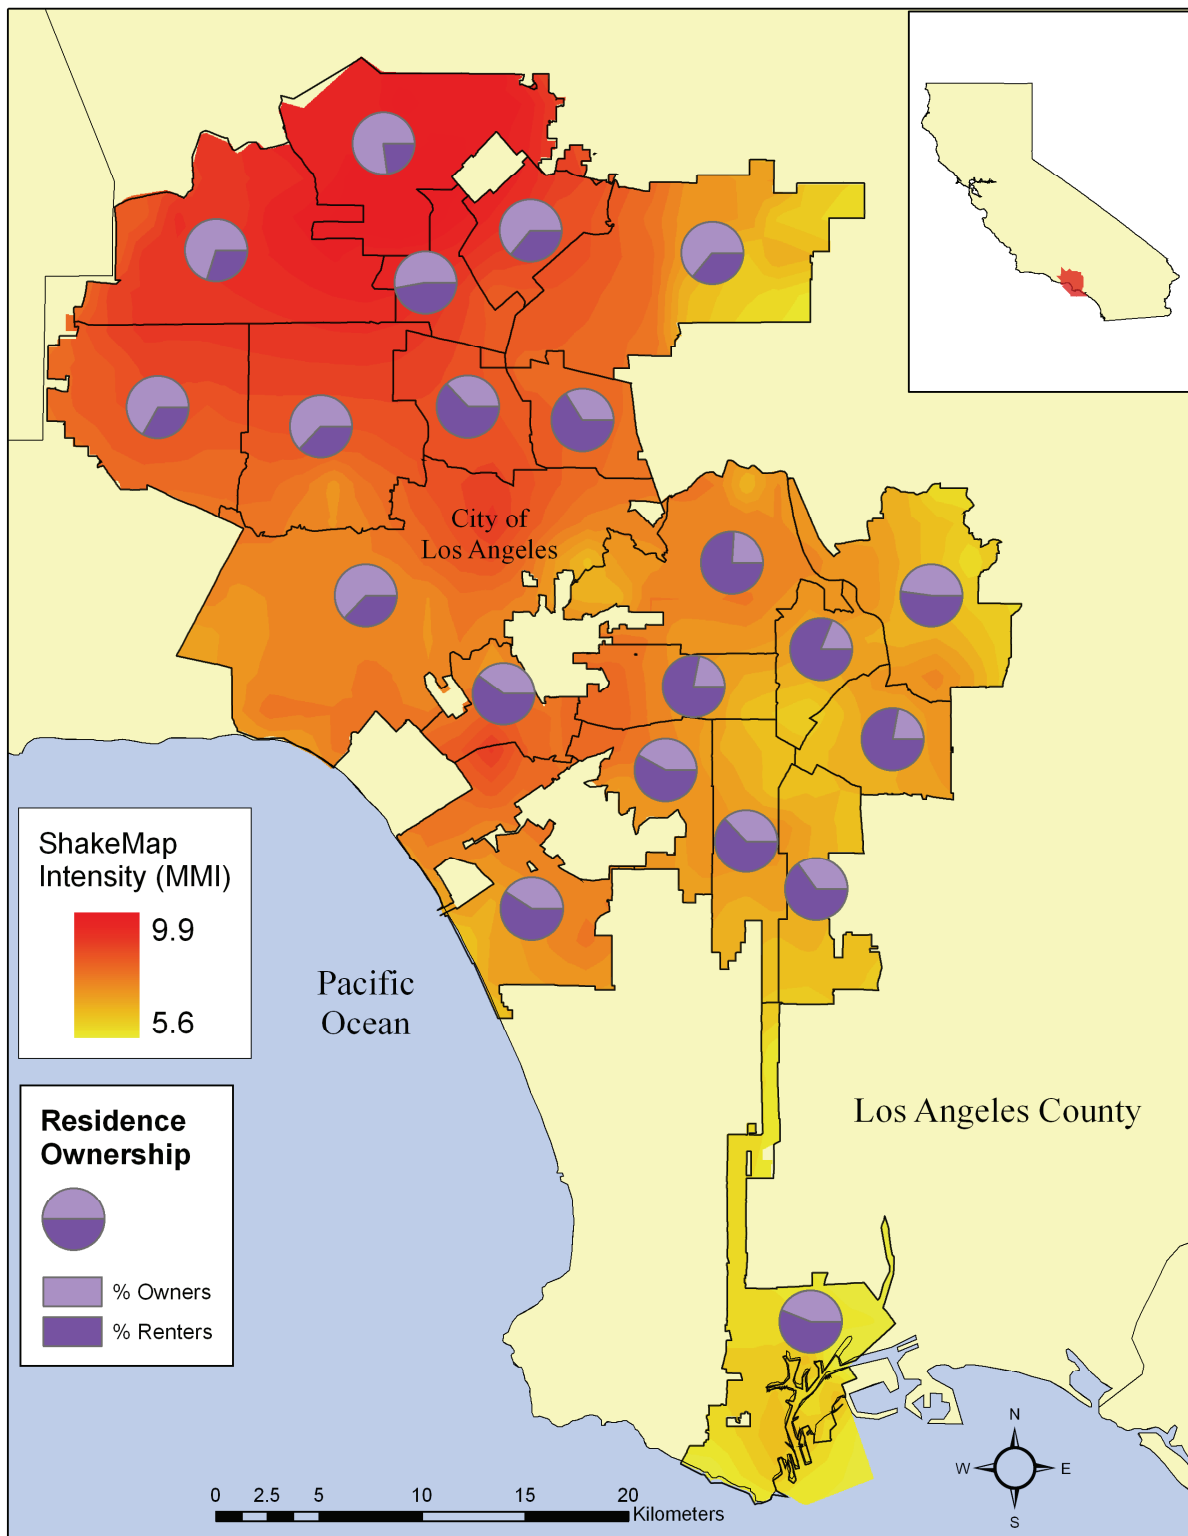


Figure 3-4 Proportion of households who own versus rent their residence, based on the 1990 census

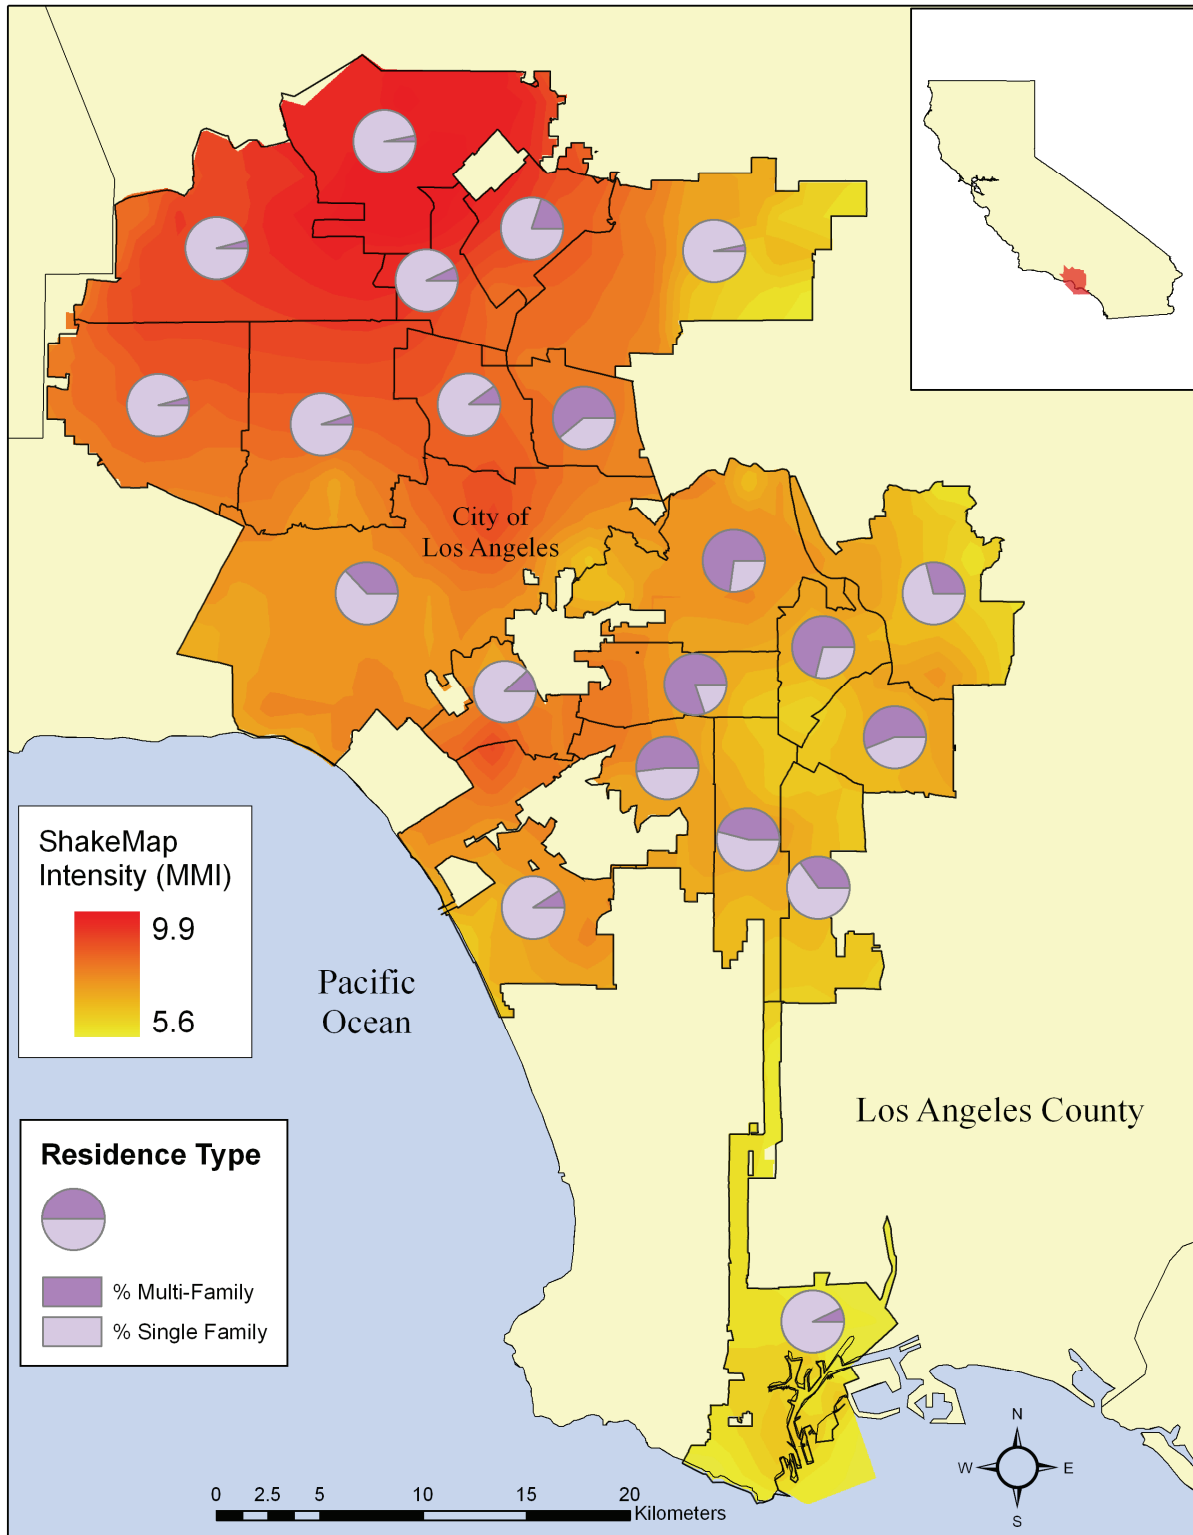


Figure 3-5 Proportion of single- versus multi-family buildings, based on the 1990 census

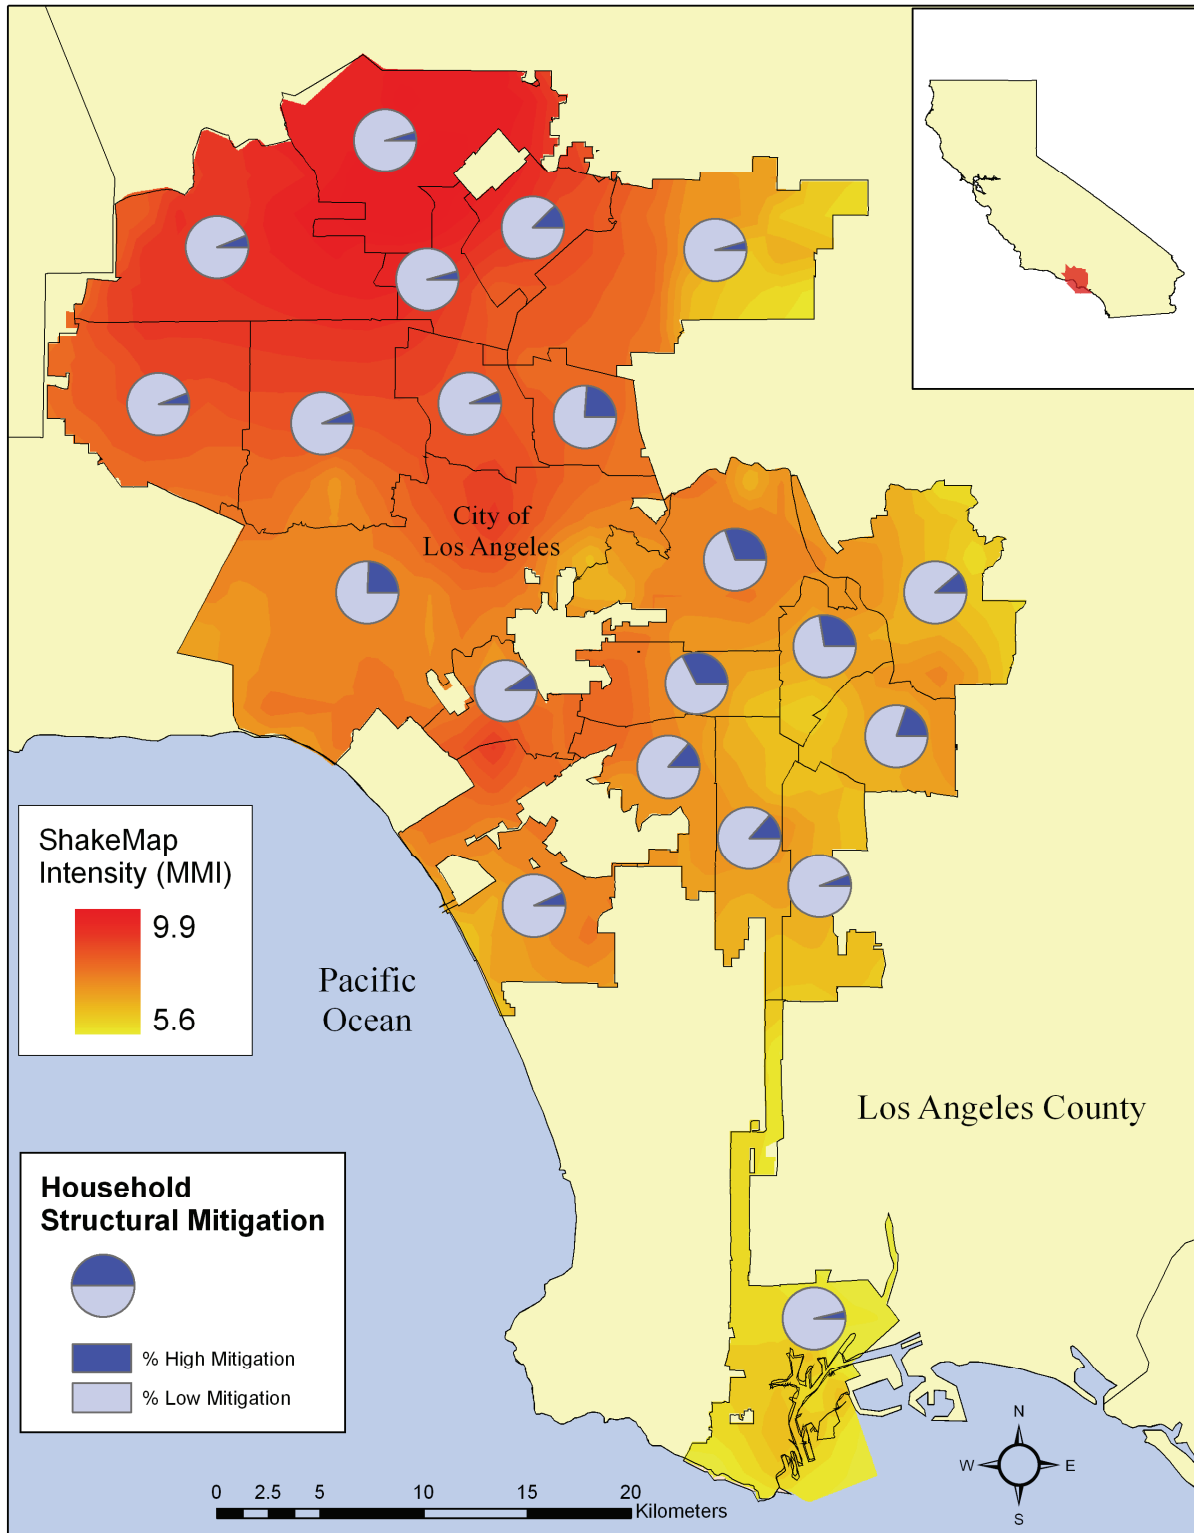


Figure 3-6 Proportion of households with high versus low level of structural mitigation done to their residence, with the threshold being $BMIT = 0.5$. These data were simulated, with higher incomes having a higher likelihood of having higher levels of structural mitigation

3.3 Businesses

The 1994 Zip Code Business Patterns Standard Industrial Classification (SIC) dataset includes data that can be used to parameterize the SIZE and SECT variables of the recovery model. Prior to being able to use the data, we had to map the individual SIC sector to the SECT variable values (0=locally- and 1=export-oriented businesses). The mappings between these variables are given in Table 3-2. The distribution of business types across Los Angeles is shown in the map of Figure 3-7. Within SIC, business size is defined in terms of number of employees. With the businesses sectors mapped to SECT, the number of each locally- and export-oriented businesses within each size range of the SIC dataset were summed across all the zip code areas within each of the 21 PUMAs. Summation was done by using GIS to note each zip code boundary (based on the 2000 US Census Zip Code Tabulation Areas) that fell completely or predominantly within each respective PUMA and summing the appropriate data within a spreadsheet. The value for SIZE was calculated then as the minimum value of each SIC size range, divided by 500 employees (the predominant size threshold defining large businesses for the SBA). Large businesses make up less than 1% of the total number of businesses in each Los Angeles PUMA. The only other recovery model variable for businesses that had some readily suitable information (that we're aware of) was that for availability of grants and the maximum possible post-earthquake loan amount. According to Tierney, (1995) little or no grant money was available to businesses for recovery. So for businesses, we set AID=0. For households, the maximum available loan amount was normalized by the value of the residence to calculate LOAN_MAX. This data wasn't available for businesses in a way that we could associate the values with the SIC dataset. The maximum allowed loan from the SBA was \$1.5 million for businesses. The average commercial property value in 2002 was \$1.8 million, which is about \$1.5 million in 1994 dollars. Assuming that property values increased from 1994 to 2002, this suggests that the SBA limit of \$1.5 million was a small amount above the average commercial property value in 1994. This means there were properties that were worth more than the SBA loan limit. Thus we made an assumption that larger businesses likely had properties of high value. Businesses with SIZE=1 have a LOAN_MAX=0.5 (half of their property's value), SIZE between 0.5 and 1 have a LOAN_MAX=0.85 (85% of their property's value) and for SIZE less than 0.5, LOAN_MAX=1.

Table 3-2 Mapping between Standard Industry Classification sectors and recovery model SECT variable

Standard Industry Classification (SIC) industry grouping	SECT (export=1/local=0)
Agricultural services, forestry, and fishing	Export-oriented (i.e., independent of local neighborhood recovery)
Construction	Export-oriented
Manufacturing	Export-oriented
Wholesale trade	Export-oriented
Transportation and public utilities	Locally-oriented
Finance, insurance, and real estate	Locally-oriented
Services	Locally-oriented
Unclassified establishments	Locally-oriented

The remaining attribute variables for businesses in the recovery model had to be simulated. To simulate SAVINGS, a random inverse normal distribution was used with a mean of SECT*SIZE and an assumed variance of 0.05. In other words, on average local businesses have little savings, regardless of their size, but for export-oriented businesses, savings increase with size. Without specific data, we assumed all businesses owned their buildings (OWNER=1) and hence go into debt if loans are taken out. We assumed that the age of the building (BYR) for each business was a uniformly distributed random number between 1930 and 1994. The 1930 minimum means that more pre-1976 (CYR) buildings are likely than post-1976. TYPE (facility size and complexity) was calculated with a random inverse normal distribution with a mean equal to SIZE and the variance being 0.1. Lastly, the degree to which a business mitigated its buildings against loss (MIT) was assumed to be uniformly random between 0 and 1. This means that on average half of the businesses were assumed to have MIT less than 0.5 and half greater. Originally, this variable was simulated based on SIZE and SECT, but the more complex calculation was dropped as part of model calibration (i.e. model performance was better assuming MIT was random).

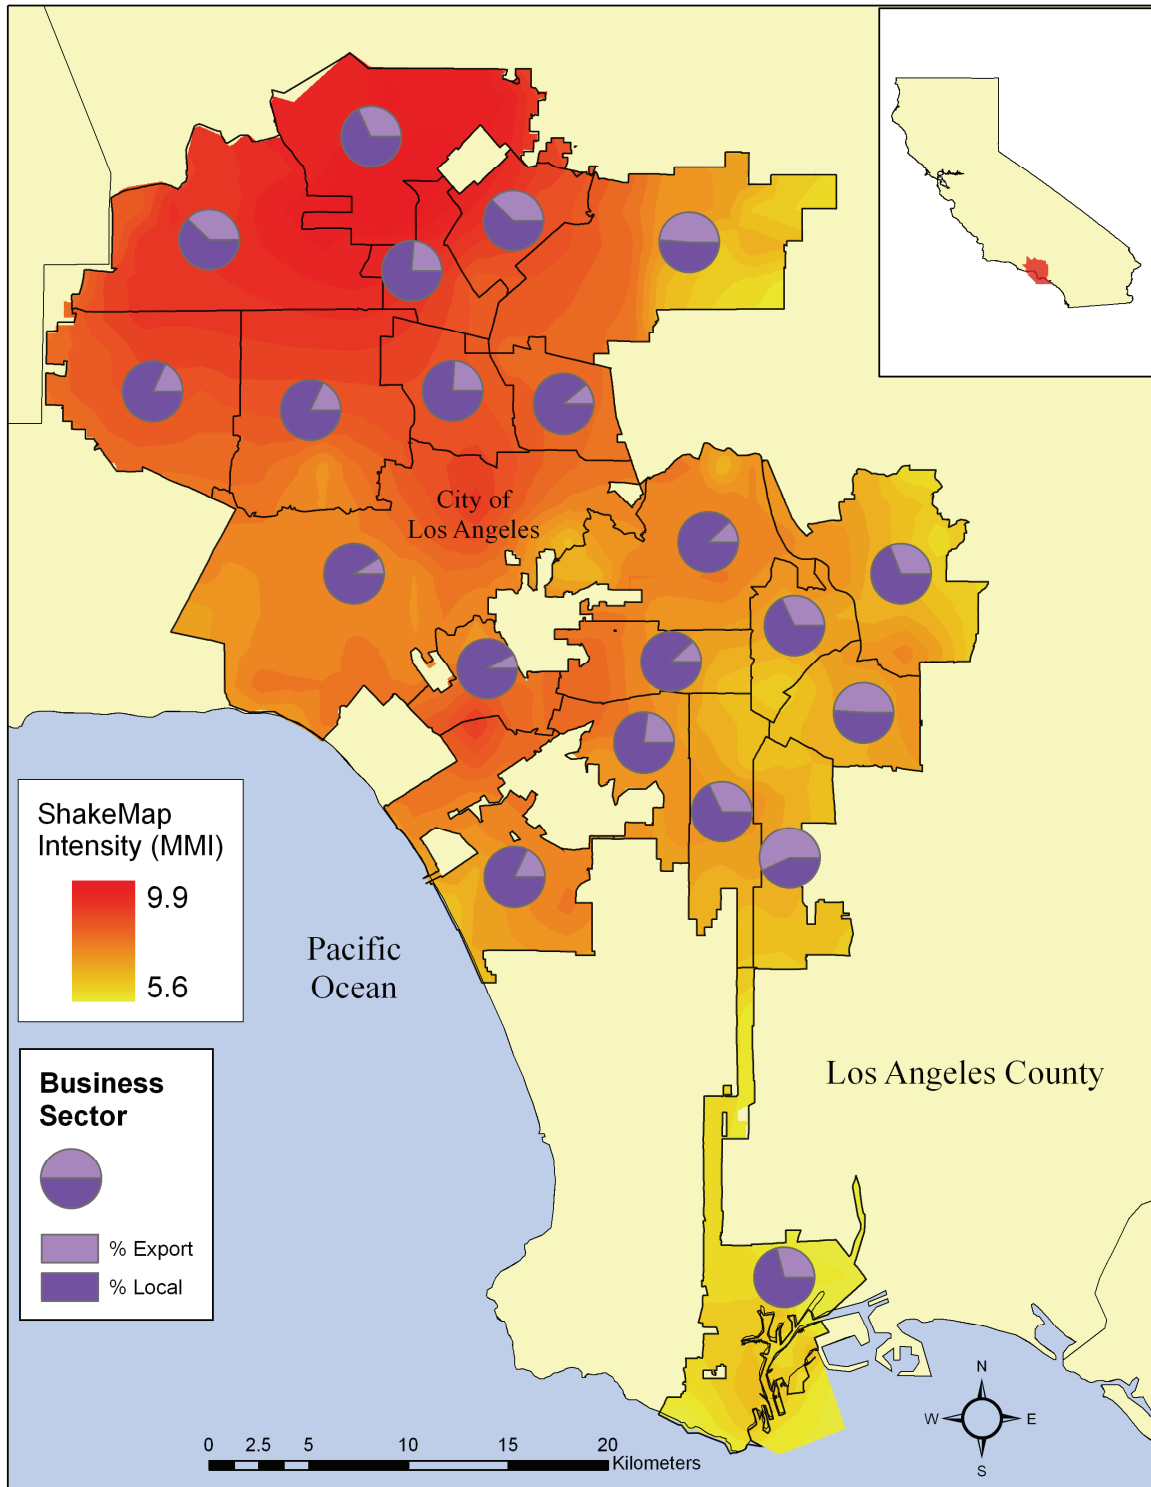


Figure 3-7 Proportion of export-oriented (SECT = 1) versus locally-oriented (SECT = 0) businesses, based on the 1994 economic census

3.4 Lifeline System

For this study, we focused primarily on the development and evaluation of the household and business components of the recovery model. Towards this end, the components for modeling the service recovery of lifelines—critical facilities, electrical network, transportation network, and water network—were replaced by time series data describing service recovery for each lifeline network. The new modularity of the recovery model made it straightforward to use lifeline-service time series data as input to the model by modifying the model to read the data rather than make calls to each lifeline sub-model. In the future, data will need to be developed describing each lifeline component variable (CONSTR, MAINT, MIT, BYR) in order to fully develop and calibrate the component models.

Inputs describing the service restoration of the transportation network in Los Angeles after the Northridge earthquake were developed based on the work of Chang and Nojima (2001). A set of post-disaster transportation network performance measures were developed and applied to earthquake disasters, including the Northridge earthquake disaster. Figure 3-8 includes a measure of traffic volume restoration of major highways in the Los Angeles area after the earthquake. This time series (denoted by ‘T’ in Figure) was assumed to be representative of transportation recovery for each PUMA within the City of Los Angeles study area for this project.

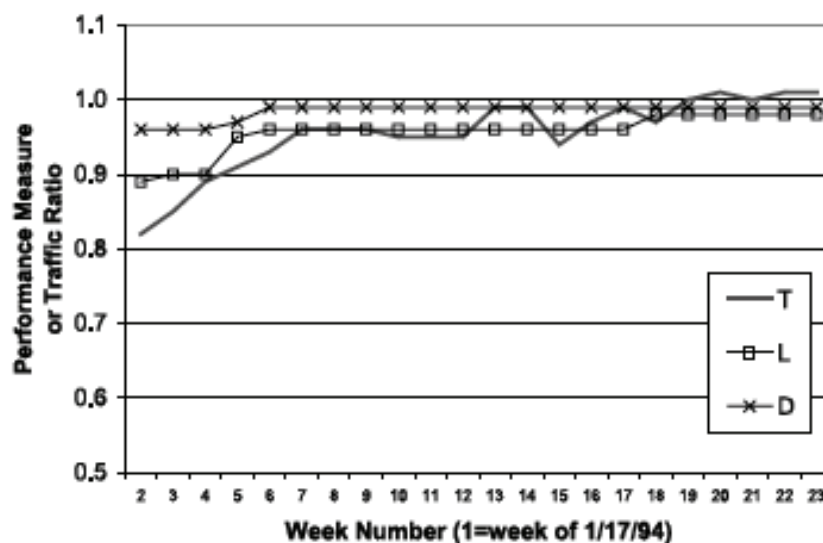


Figure 3-8 Restoration of actual traffic volumes (T) after the Northridge earthquake, and derived measures for evaluating post-disaster transportation service performance (L,D) (Chang and Nojima, 2001)

Any electrical power outages within Los Angeles were restored within the first week after the earthquake, if not within the first couple days (Chang, 2000; Davidson and Cagnan, 2005). A week is the time resolution of the recovery model and so all neighborhoods were modeled to have electricity after the first model time step. This was similarly the case for water service

restoration—any outages were fixed within the first week after the earthquake (LADWP, personal communication). For critical facilities, we focused on service outages of local hospitals. Based on a survey of several references that describe hospital damage and evacuation, cross-referenced with zip codes of existing Los Angeles hospitals, a time series was created for the two PUMAs (6513 and 6517) in which we estimated there was hospital service loss (OSHDP, 2005; FEMA, 2004; Schulz et al. 2003; SSC, 1995). In the former PUMA unit, all four hospitals were damaged with three restoring service within the first four weeks after the earthquake, and one being permanently closed. For the latter PUMA, care service was restored after the first week.

SECTION 4

CO-EVENT MODEL CALIBRATION AND RESULTS

The recovery model was run to simulate the impact and recovery of the Northridge earthquake with data developed to represent the conditions of the City of Los Angeles and its lifeline networks, as well as the attributes of residing households and businesses. The developed data was organized in seven Microsoft Excel spreadsheets (one each for the neighborhood, household, business, critical facilities, transportation network, electrical network, and water network variables), with each spreadsheet, except for the neighborhood variables, having an individual worksheet corresponding to each of the 21 PUMAs. A script was run to import this data into the MATLAB workspace, prior to running the co-event model, which stores outputs in the same workspace to allow for subsequently running the post-event model. Results of both the co-event and post-event model were compared against various data gathered for evaluating the performance of each sub-model. When data was available for a particular output variable, calibration was done by either varying model parameters (not input data), revising model algorithms, or in one case (MIT for businesses) the means in which the input data was simulated. In this chapter, the calibration and final results of the co-event model are described, with the post-event model being described in the following chapter.

4.1 Household Calibration and Results

The three major sub-models that required calibration for the co-event model with respect to households were for calculating building damage (DMG), injury to building occupants (INJURY), and whether or not a household had insurance (INS). Calibration of the sub-models for DMG and INJURY was done by varying the median and variance parameters for the respective fragility curves. The parameters defining the fragility curves associated with household building damage levels for single-family residences (SFRs) and multi-family residences (MFRs) are listed in Table 4-1.

Table 4-1 Residential building damage fragility curve parameters—median and variance for lognormal cumulative distribution functions

	25% Damage Level	50% Damage Level	75% Damage Level	100% Damage Level
Single-family residence	median=2.253 variance=0.1	median=2.385 variance=0.15	median=2.518 variance=0.175	median=2.65 variance=0.2
Multi-family residence	median=2.142 variance=0.1	median=2.268 variance=0.15	median=2.394 variance=0.175	median=2.52 variance=0.2

Figure 4-1 shows the results of calibrating residential damage prediction, comparing the model damage estimates averaged across each neighborhood versus average shaking intensity, to

observations from the Northridge earthquake (EQE, 1995). Up to MMI=8, the co-event model predicts a similar trend as measured after the Northridge earthquake, with slight under-prediction for SFRs and slight over-prediction for the MFRs. Beyond MMI=8, model predictions diverge from the data of EQE (1995), with damage for single-family buildings being over-predicted and damage for multi-family buildings being under-predicted. Model predictions for these shaking intensities however are bounded by the observed trends for two types of buildings. Figure 4-2 shows a map of the percentage of the total number of SFRs and MFRs that experience any damage computed using the calibrated damage fragility curves. Notice that in general a larger proportion of MFRs were predicted to have experienced some damage than SFRs, as was generally observed. Figure 4-3 shows a map describing the level of predicted damage for the population of damaged residences (all types). Comparing these two figures, there are some neighborhoods where a low overall percentage of damaged buildings are predicted, but of those modeled to experience some damage the level of damage is relatively high. This is due to the influence of building type (MFRs being more vulnerable) and randomness in the model.

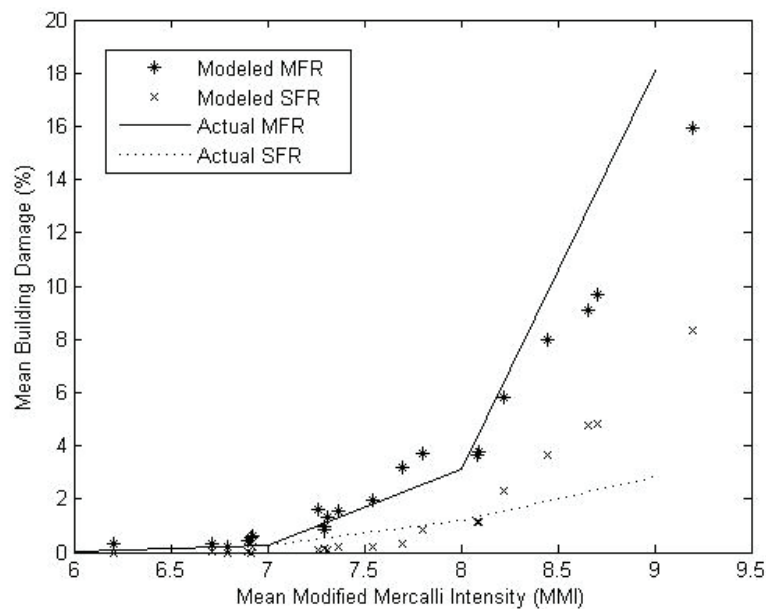


Figure 4-1 Comparison of modeled and actual relationship (from EQE, 1995) between mean building damage and mean Modified Mercalli Intensity (average across each study unit)

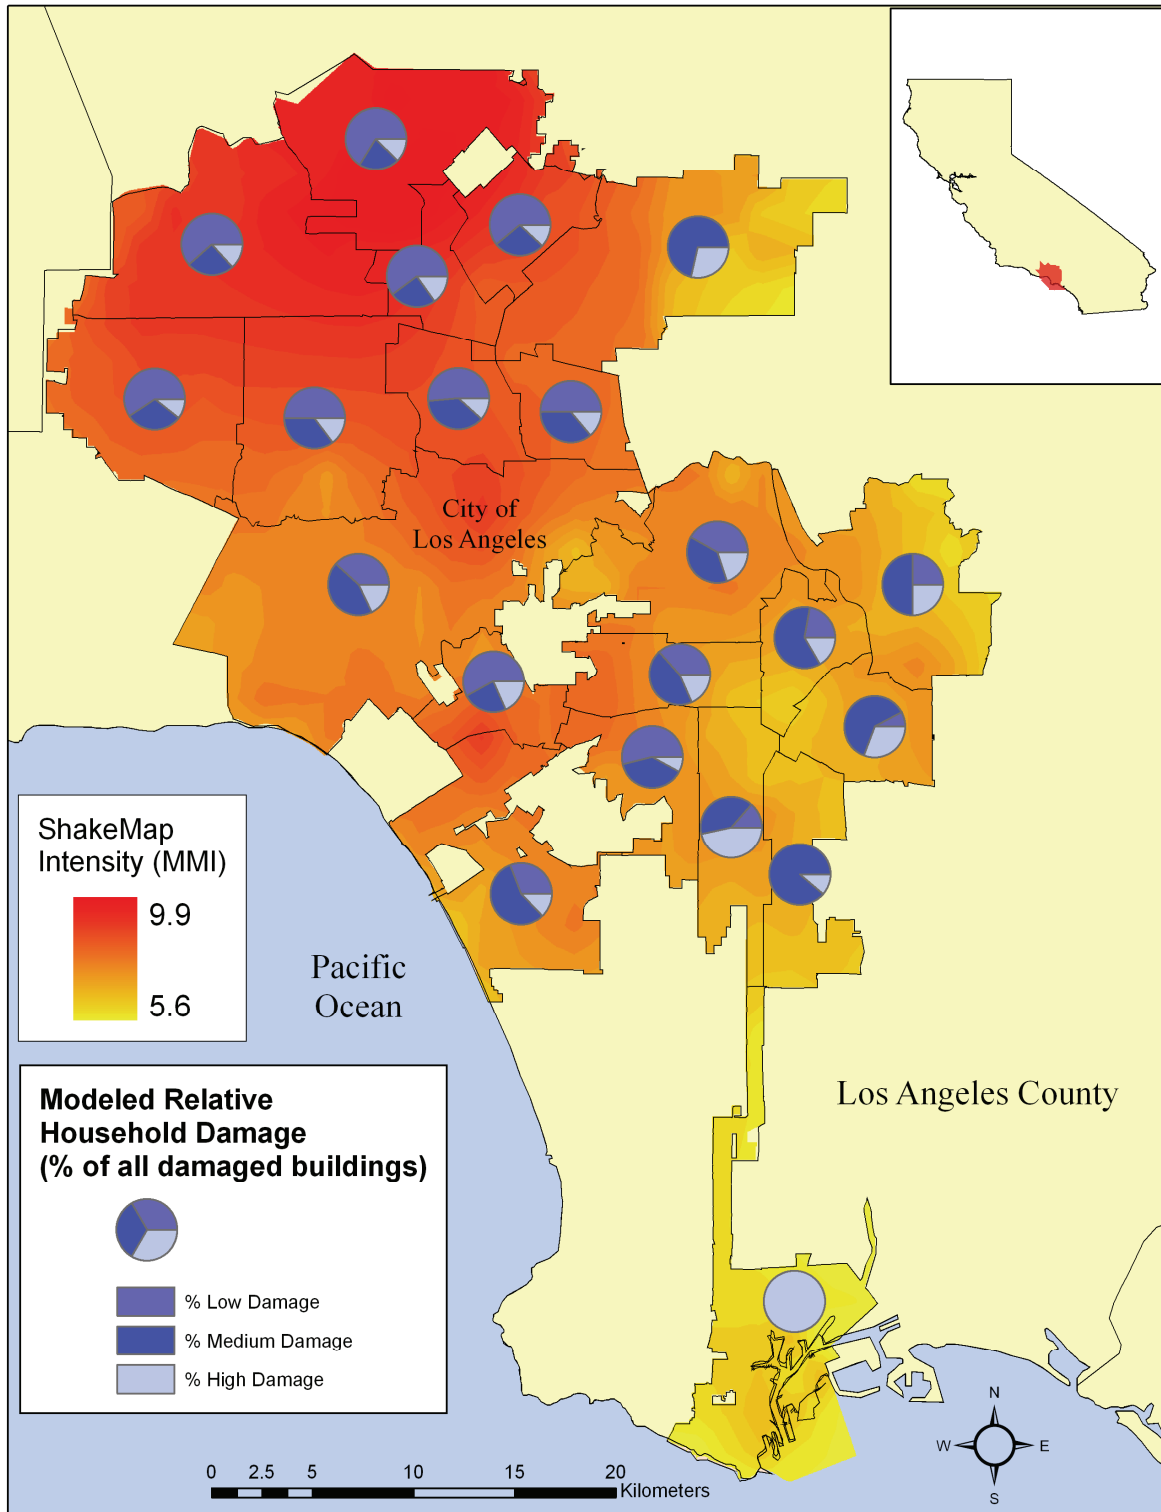


Figure 4-2 Modeled percentage of household residences damaged by Northridge ground shaking. (MFR: multi-family residence; SFR: single-family residence)

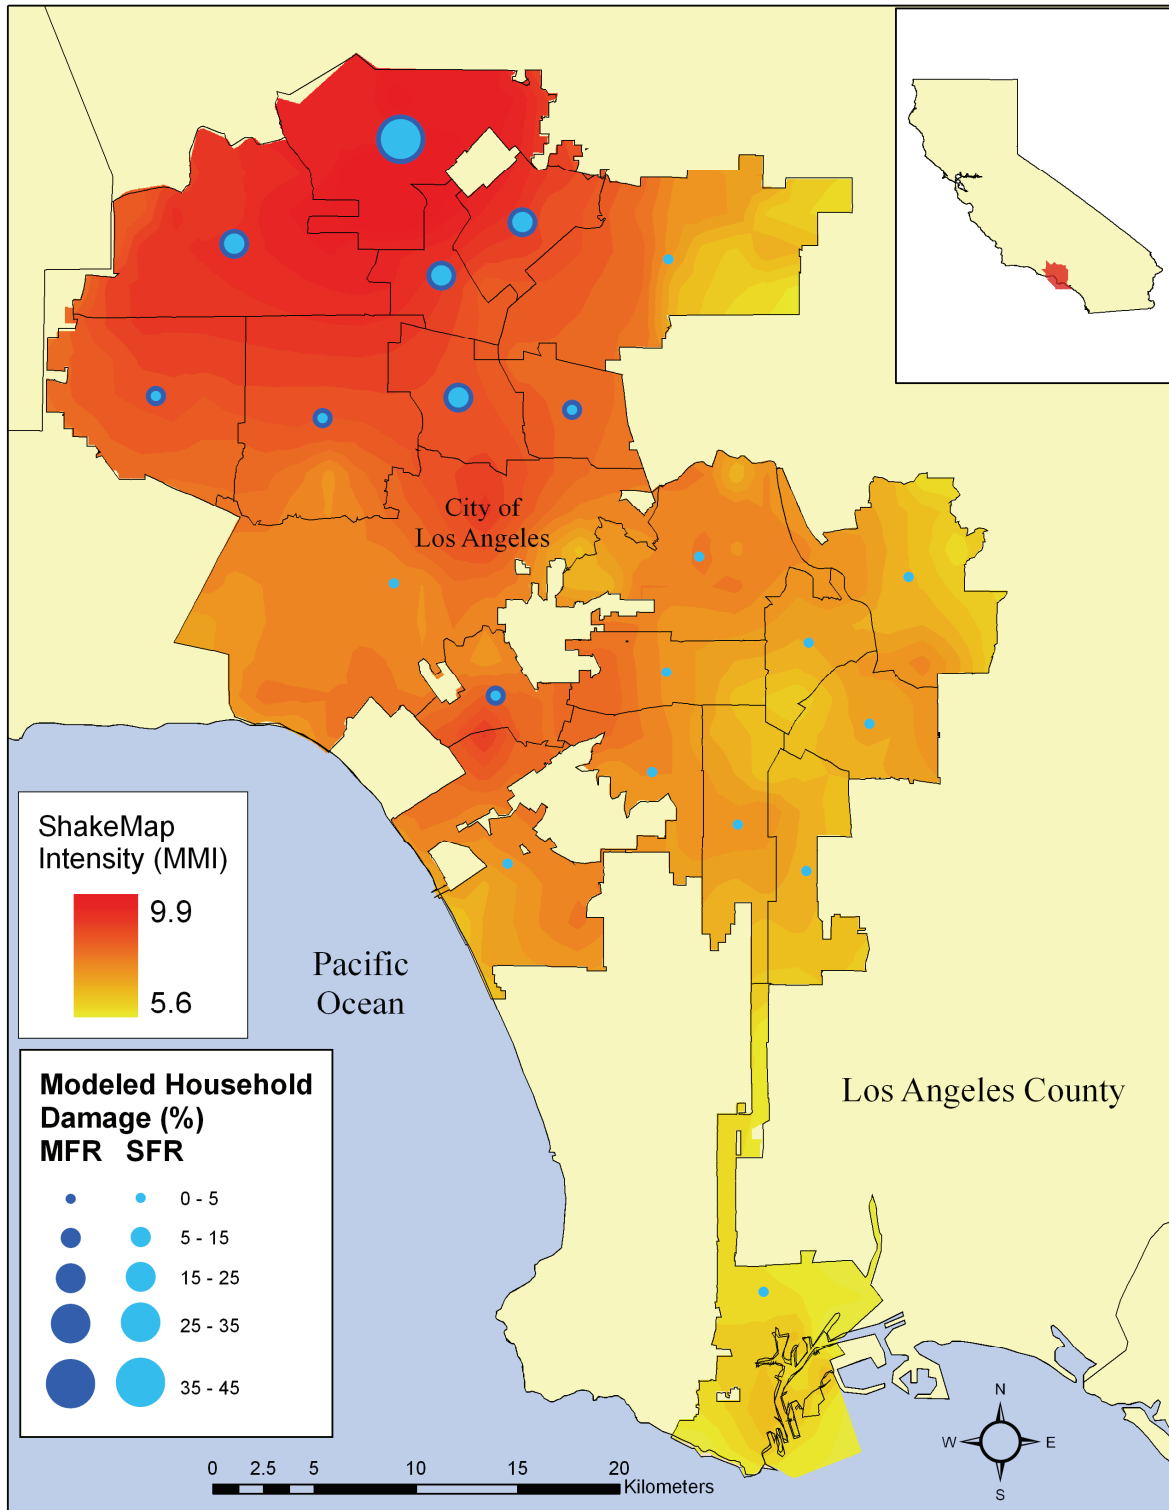


Figure 4-3 Modeled proportion of damaged residences with low, medium (yellow tag), or high damage (red tag) levels

Calibration of the sub-model for predicting household INJURY was conducted similarly to that for residential damage (by varying the median and variance of the associated fragility curve). In this case, we had two different data sources with which to calibrate the model. The final median value of the injury fragility curve is 2.275, while the variance is 0.2. Seligson et al. (2002) conducted a survey in which they found about 8% of households reporting having experienced some injury as a result of the Northridge earthquake. As calibrated, the co-event model predicted 3.76% of the total household population with some injury. Peek-Asa et al. (2000) have data describing injury rate versus average shaking intensity similar to the residential damage trends of EQE (1995) in Figure 4-1. These data are plotted in Figure 4-4 with calibrated model predictions averaged over each PUMA. Through calibration, the model is able to exhibit the bilinear trend of the Peek-Asa et al. (2000) observations, but over-predicts injury rates significantly beyond MMI=8. Further adjustments to the fragility curve parameters to decrease the predicted rate lead to predictions of no injuries. Observing that the actual injury rates are quite small, this behavior may be the result of using only 5% of the total population. Figure 4-5 shows a map of the percentage of total households predicted to have experienced some injury across each of the Los Angeles PUMAs. The predicted percentage for each PUMA is generally lower than that for residential damage shown in Figure 4-2. One of the variables having a significant influence on predicted injuries in the co-event model is a household's income. Figure and Figure 4-7 describe the predicted trend of injury rates with respect to income. Suitable data for calibrating the model with respect to income were not available, but we would expect a higher proportion of injuries to be associated with low incomes. Data are available that show a strong relationship with increasing age of residents to injury (Peek-Asa et al., 2000). However, currently the model does not account for age.

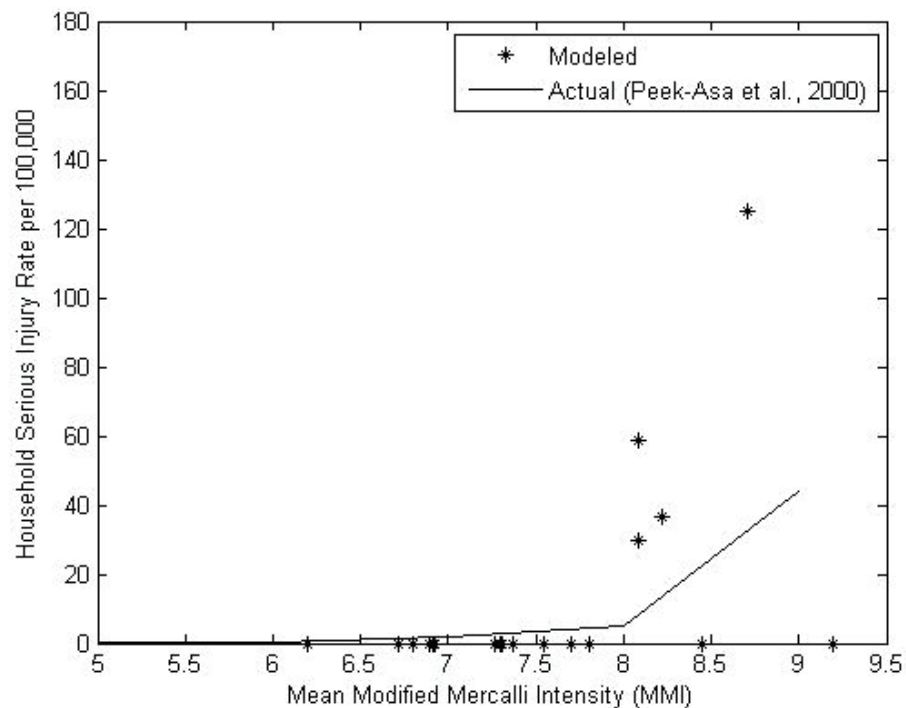


Figure 4-4 Comparison of modeled and actual relationship between household injury rate and mean Modified Mercalli Intensity (averaged over each study unit)

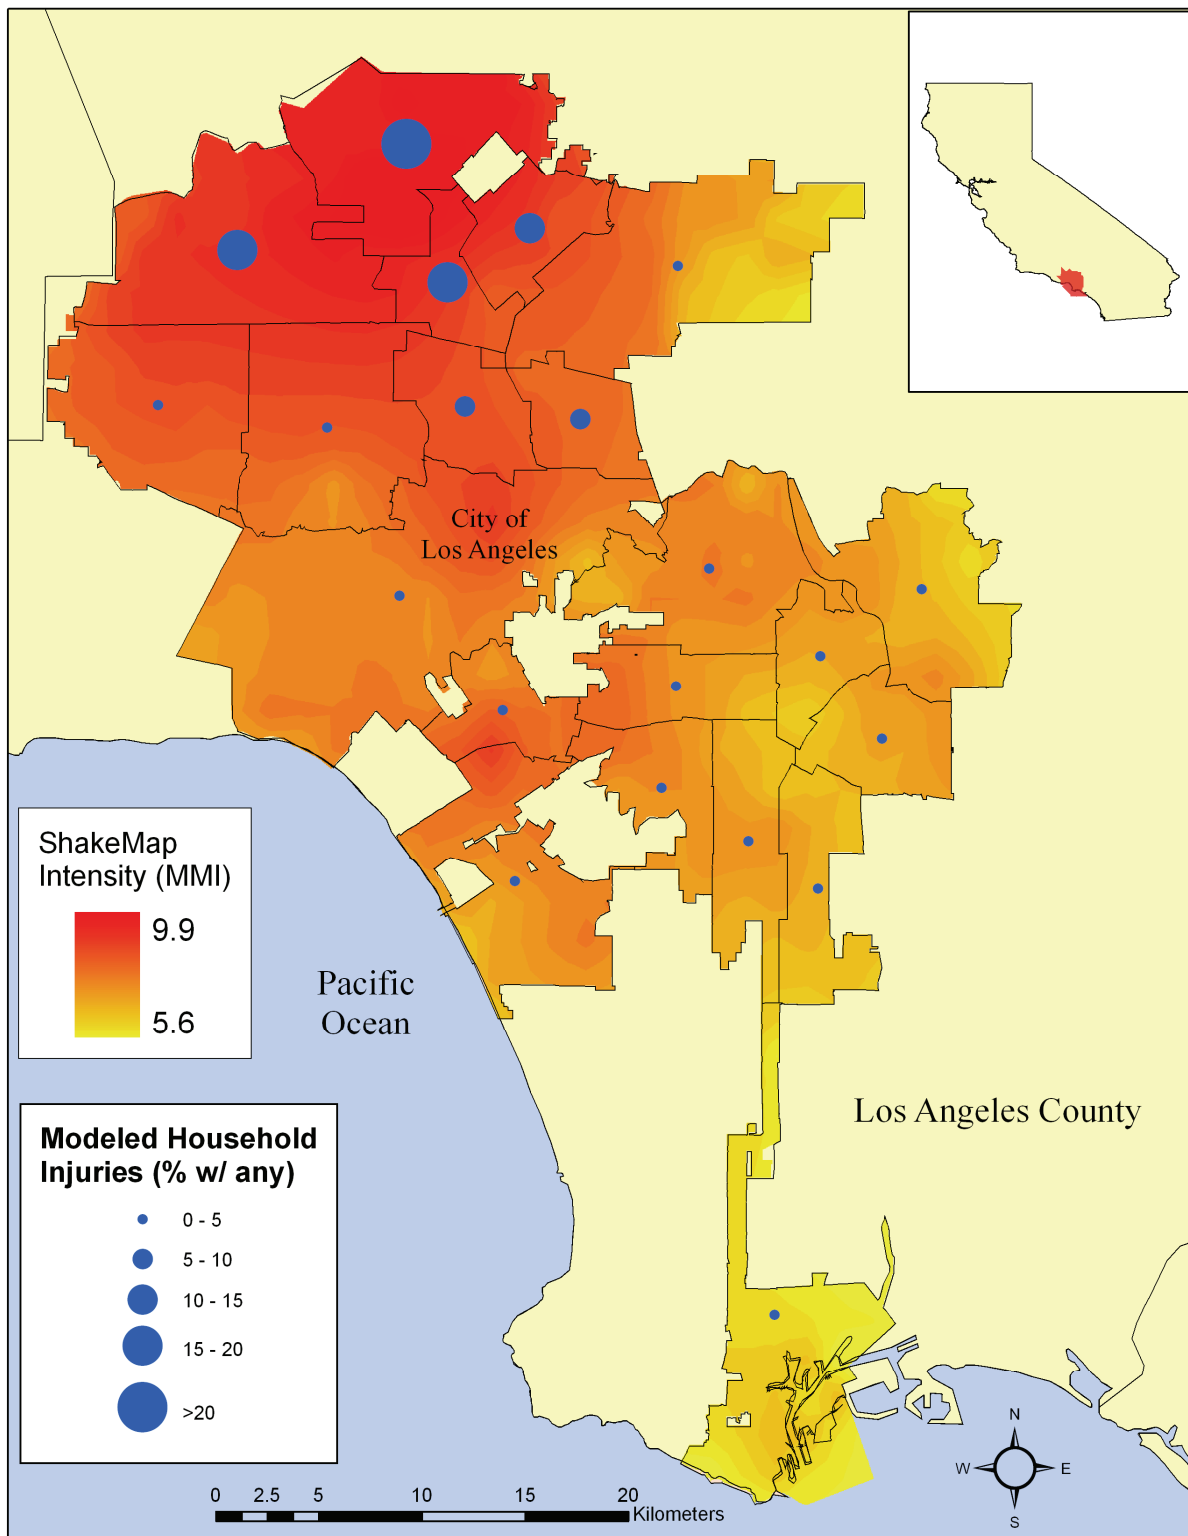


Figure 4-5 Modeled percentage of households experiencing some injury

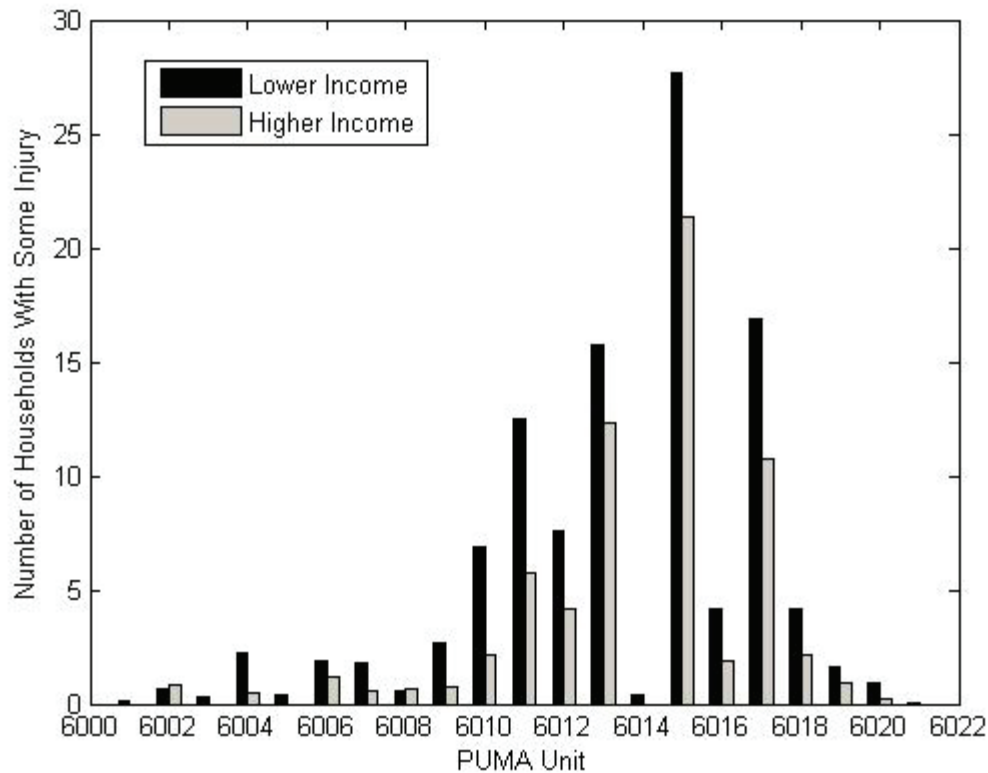


Figure 4-6 Comparison of injury rate between lower (INC<0.5) and upper income (INC>0.5) households

The final co-event sub-model associated with households was calibrated for predicting whether or not a household has insurance prior to a disaster (INS). According to Loukaitou-Sideris and Kamel (2004) about 40% of Los Angeles households had insurance, while Johnston (2000) estimated that 60% did. The percentage of households predicted to have insurance is about 34%. The sub-model for predicting INS does not have a specific parameter that can be varied in order to calibrate predictions. The algorithm treats INC, (1-MARG), and OWNER as probabilities and compares the combination of these probabilities with a uniform random number. The proximity of the predicted value to the actual percentage of households with insurance suggests that this algorithm is reasonable. Figure shows a map of the percentage of households with insurance. Note that generally the PUMAs with the highest average shaking intensities also have the highest proportion of households predicted to have insurance. This result is strongly influenced by the distribution of the proportion of homeowners (Figure 4-8).

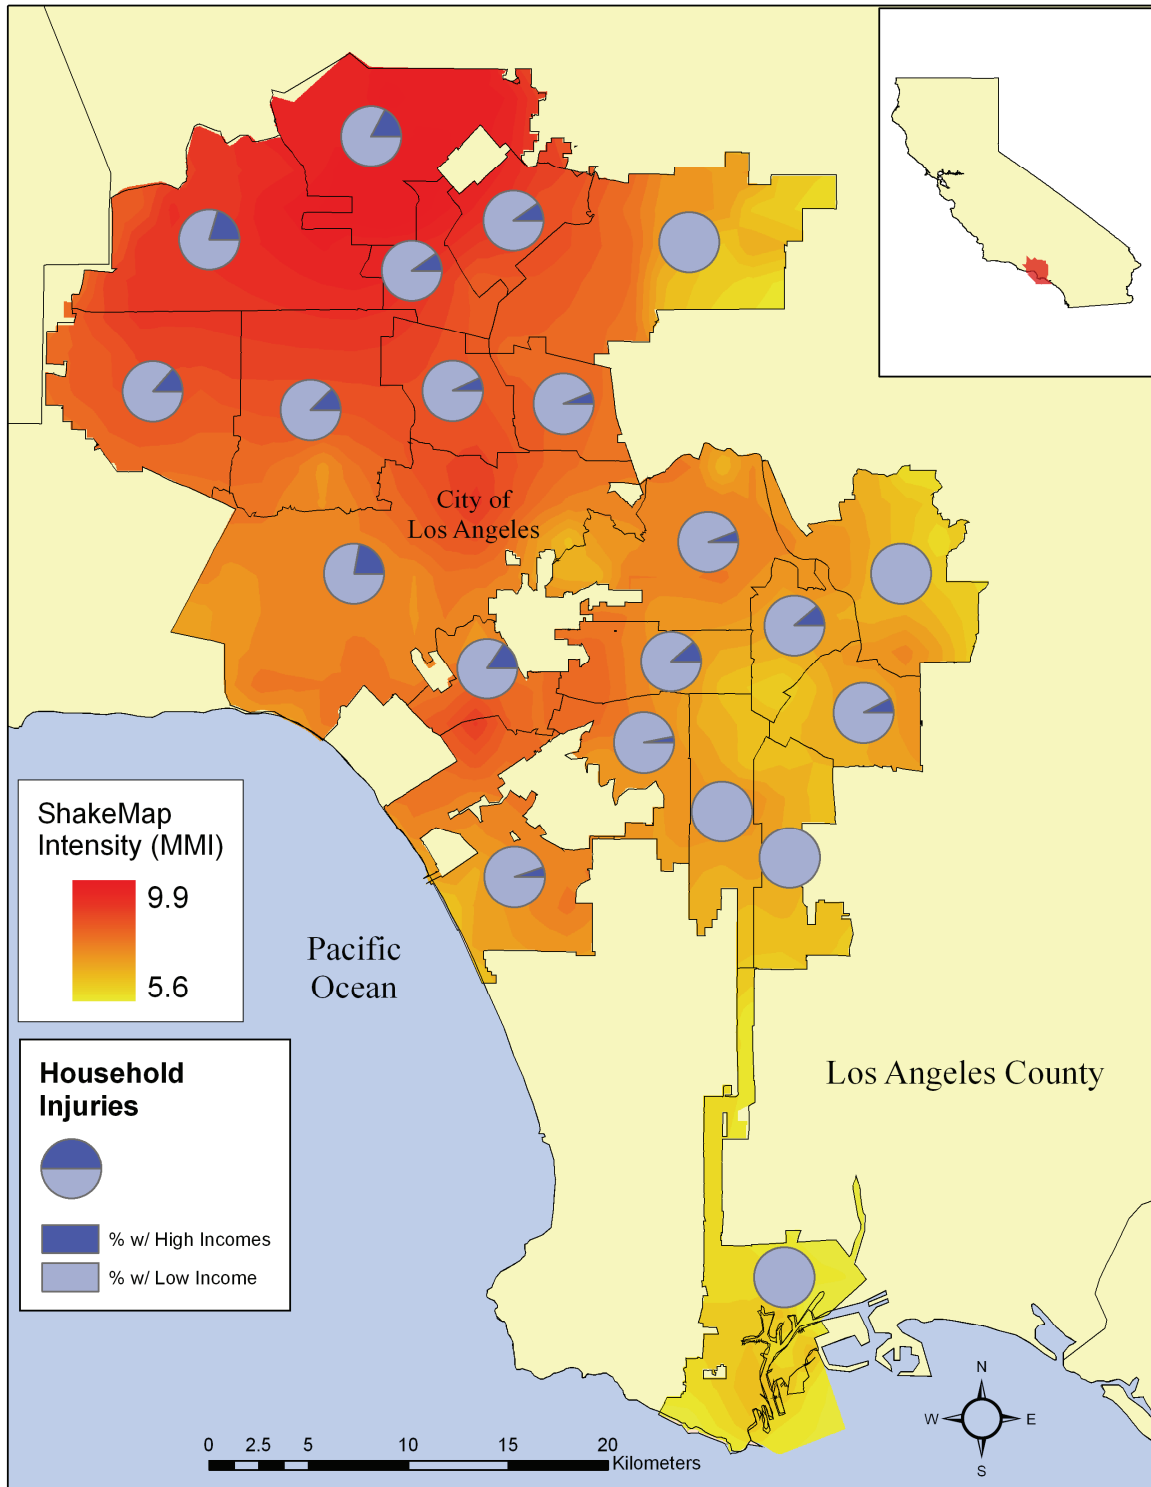


Figure 4-7 Modeled proportion of injured households with higher versus lower income, with the income threshold being $INC = 0.5$ (about \$62,500 in 1990)

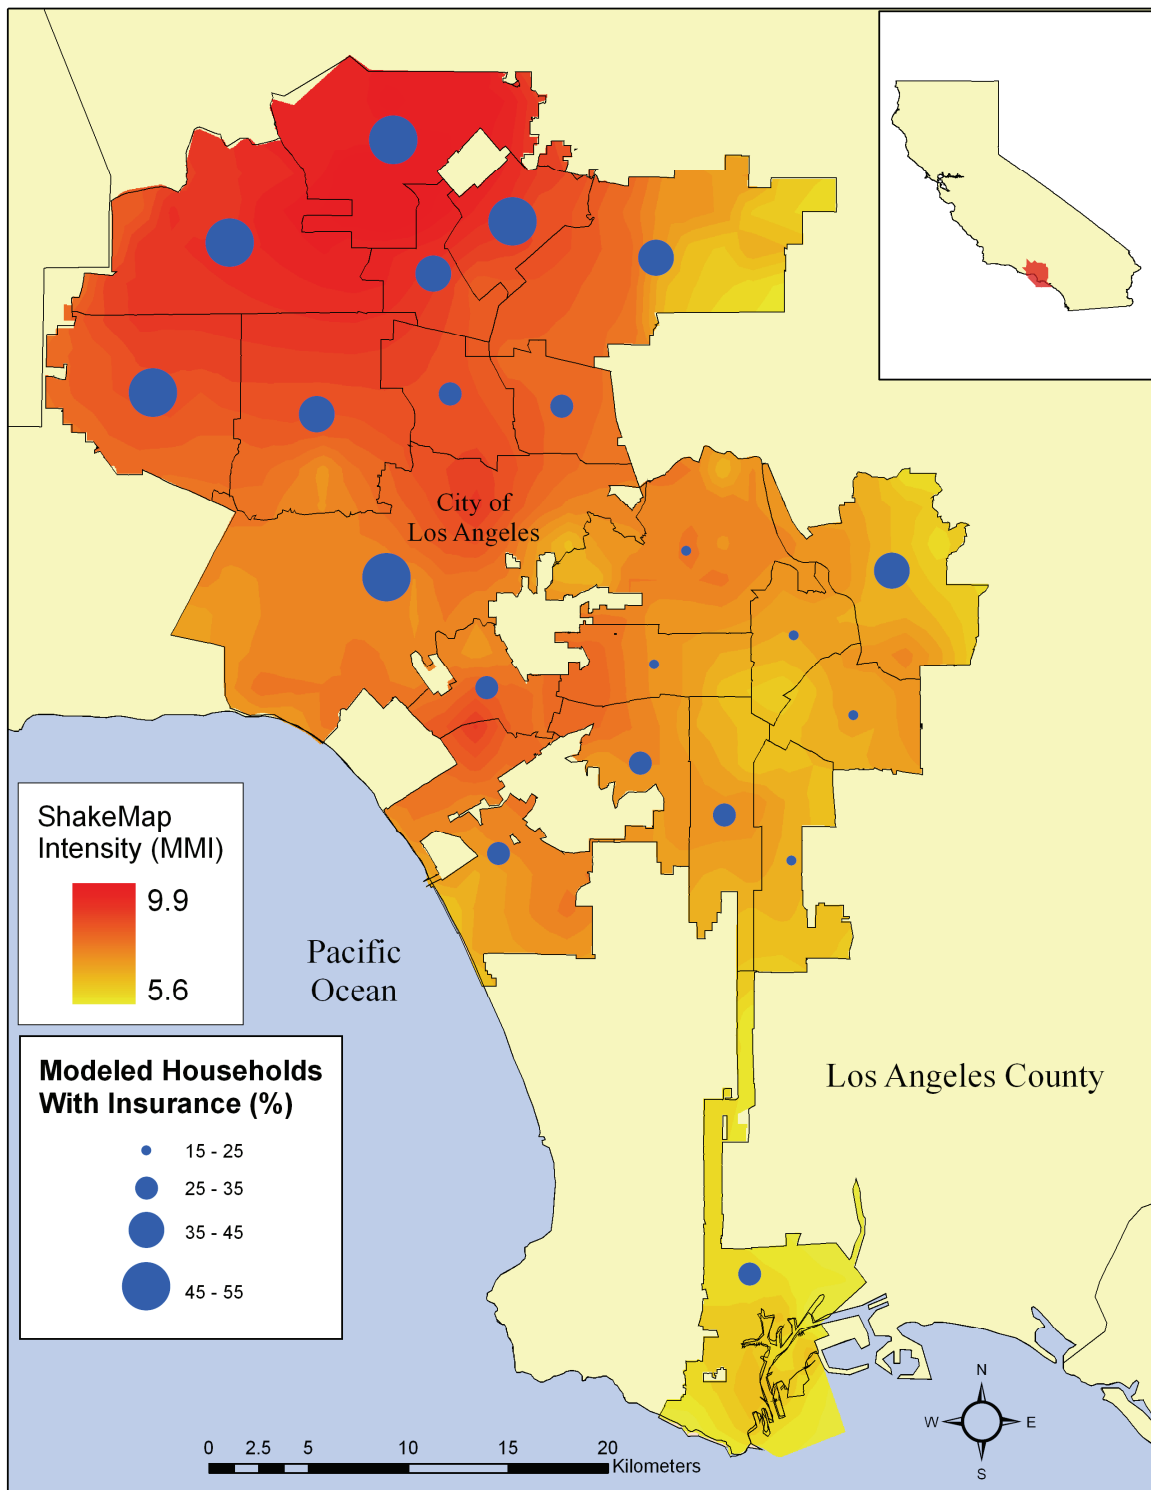


Figure 4-8 Modeled percentage of households with insurance

4.2 Business Calibration and Results

The sub-models in the co-event model associated with businesses that can be evaluated and calibrated are similar to those for households. However, the type of data that can be used in comparison to model predictions differs with respect to building damage and is not available for the immediate reduction in demand for businesses (i.e., INJURY). Data available for insurance is comparable. Data from Tierney (1995) describe the percentage of businesses across Los Angeles with some damage, as well as the percentage that were yellow and red tagged. Data also describe the percentage of small versus large businesses with some damage. These data were used to calibrate the business building damage fragility curves.

Table 4-2 Business building damage fragility curve parameters—median and variance for lognormal cumulative distribution functions

	25% Damage Level	50% Damage Level	75% Damage Level	100% Damage Level
Small buildings (TYPE=0)	median=2.01 variance=0.1	median=2.129 variance=0.15	median=2.467 variance=0.175	median=2.365 variance=0.2
Large buildings (TYPE>0)	median=2.095 variance=0.1	median=2.219 variance=0.15	median=2.342 variance=0.175	median=2.465 variance=0.2

Figure 4-9 shows the comparisons between observed and predicted damage after calibration of the business building damage fragility curves. Yellow and red-tags are associated with 33% to 66% and 66% to 100% damage, respectively. Overall, the prediction for businesses with some damage (21%) is close to the observation (22%). The model over-predicts the percentage of buildings suffering low damage (11.6% vs. 13%), while it under-predicts the percentage of red-tagged buildings (18.2% vs. 20.7%). Tierney (1995) observed that a higher percentage of small businesses suffered damage than large businesses. The model predicts a similar trend, while slightly over-predicting the absolute number of each type of businesses with some damage. Business size is not directly considered in computing building damage, but influences the result through building type (TYPE), age of occupied buildings, and the degree to which the business has taken structural mitigation measures (MIT). A map showing the predicted distribution of businesses with some structural damage across Los Angeles is given in Figure 4-10, while Figure 4-11 shows the relative percentage of damaged businesses that were yellow and red tagged. The proportion of yellow and red tagged buildings is predicted to be similar across all of Los Angeles, which probably reflects the fact that the data used in calculating damage was stochastically simulated. For comparison with Figure 4-1, the relationship of average building damage with shaking intensity is shown in Figure 4-12. The magnitude and trajectory of the trend is somewhat similar to that for damage of MFRs.

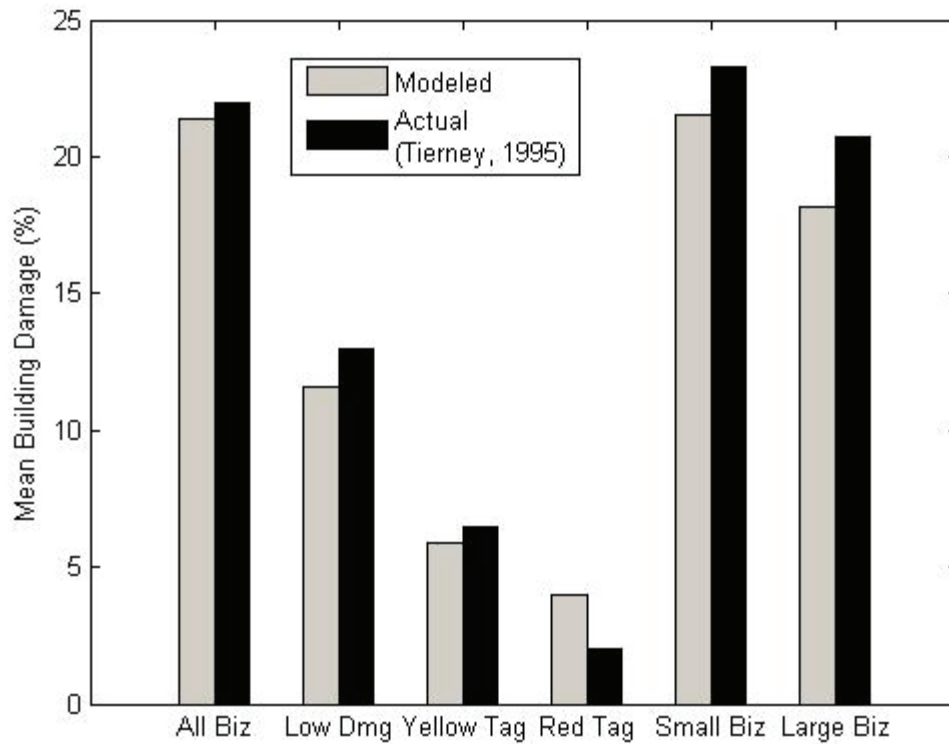


Figure 4-9 Comparison of modeled and actual building damage for businesses: All businesses with some structural damage, all businesses with low damage, all businesses with medium structural damage (yellow tag), all businesses with high structural damages (red tag), small businesses with some structural damage, and large businesses with some structural damage

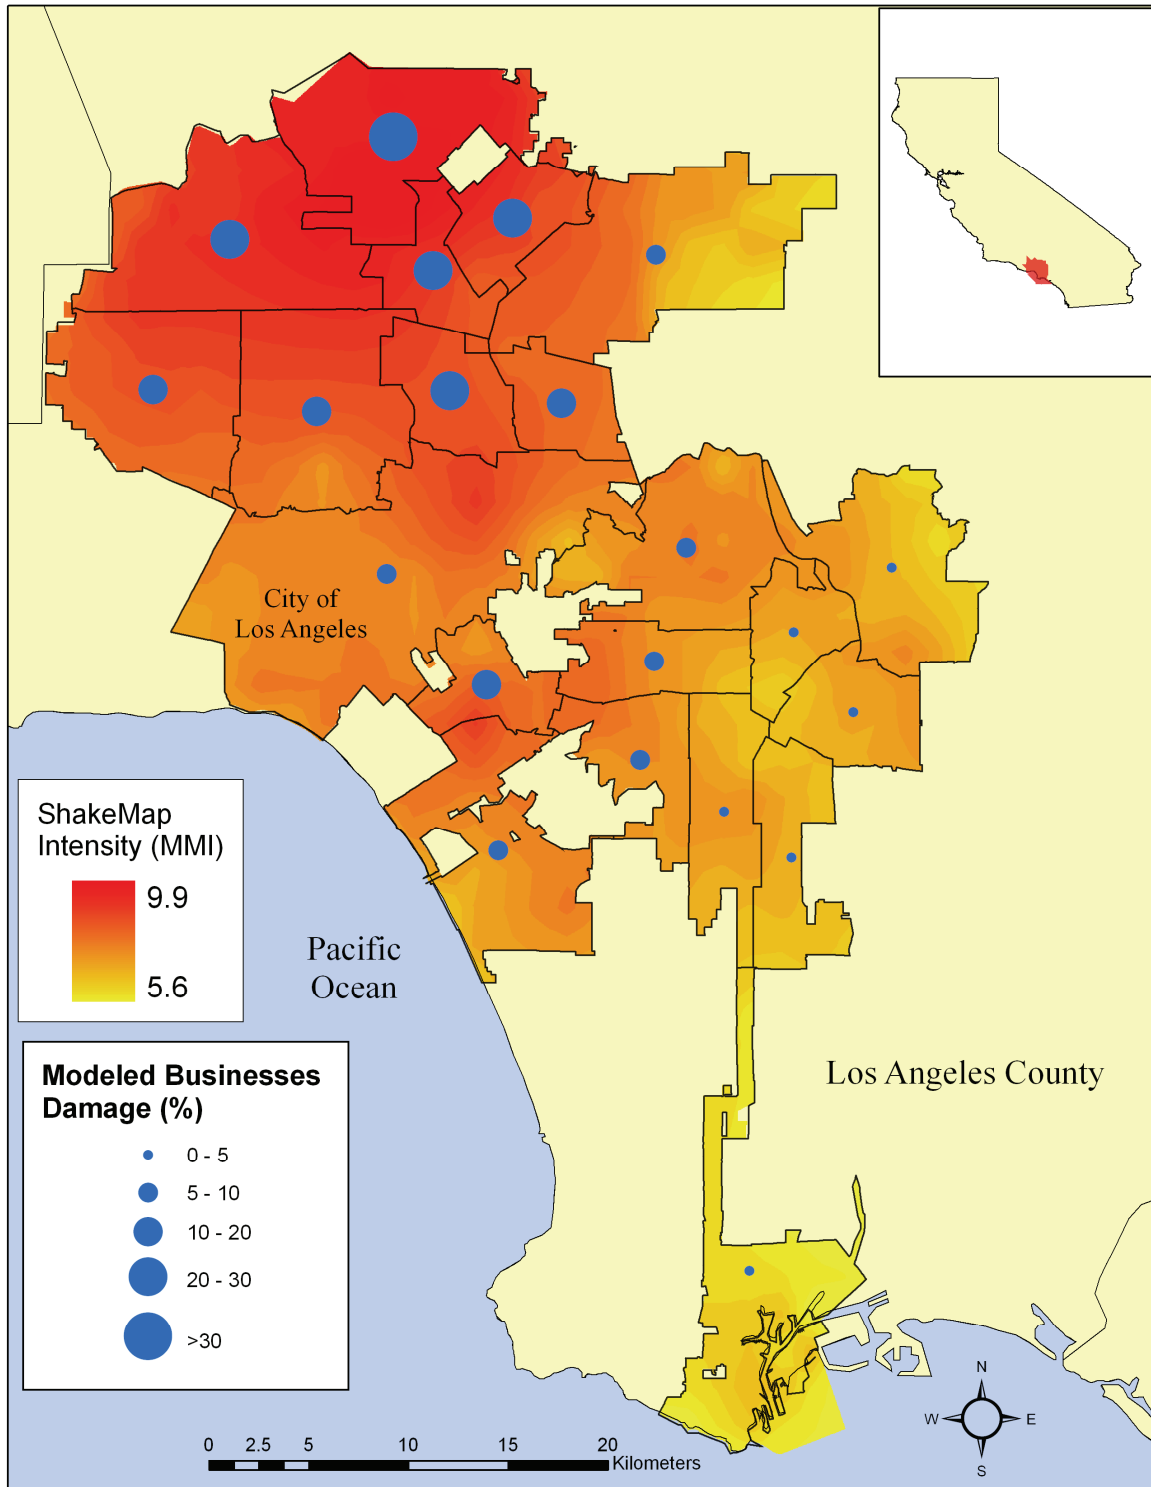


Figure 4-10 Modeled percentage of businesses with some damage

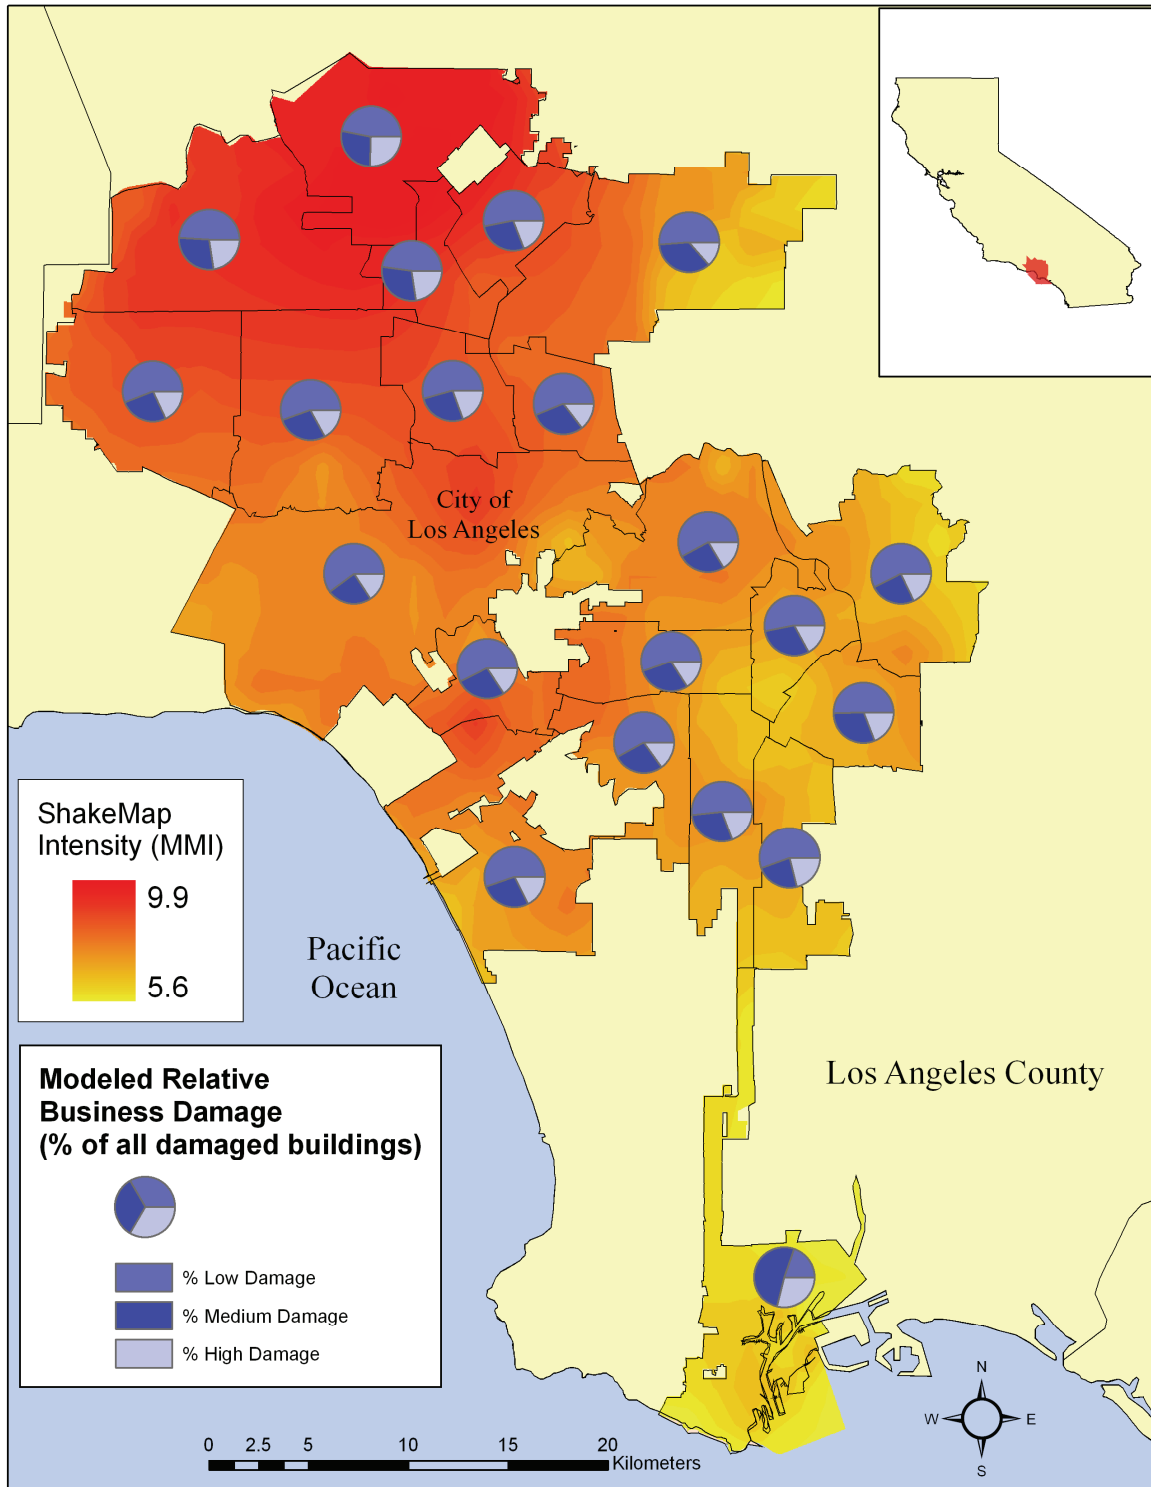


Figure 4-11 Modeled proportion of business with low, medium (yellow tag), and high (red tag) damage levels

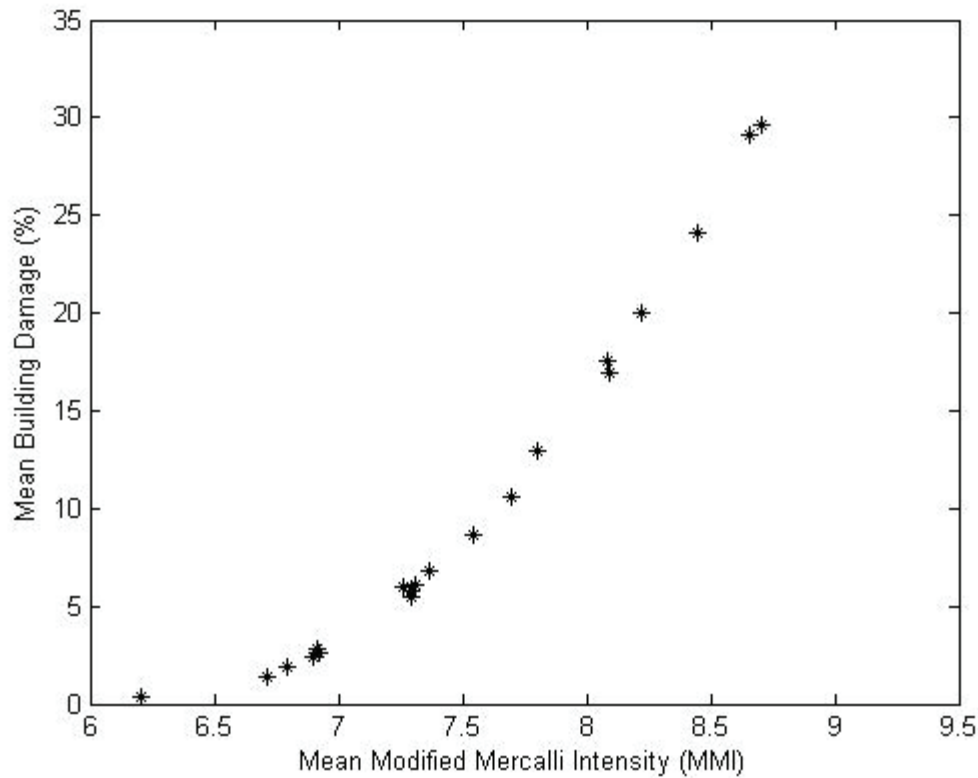


Figure 4-12 Mean building damage of businesses versus mean Modified Mercalli Intensity (MMI), averaged across each of the 21 study units in Los Angeles

The percentage of businesses in Los Angeles with insurance at the time of the Northridge earthquake was about 10% according to Alesch et al. (2004) and 20% according to Tierney (1995). The sub-model for business insurance, unlike for households, has an exponent that can be calibrated, which was varied to get a prediction of 15% modeled businesses with insurance. Figure 4-13 presents a map that shows the distribution of businesses with and without insurance across Los Angeles, which largely follows the distribution of business size.

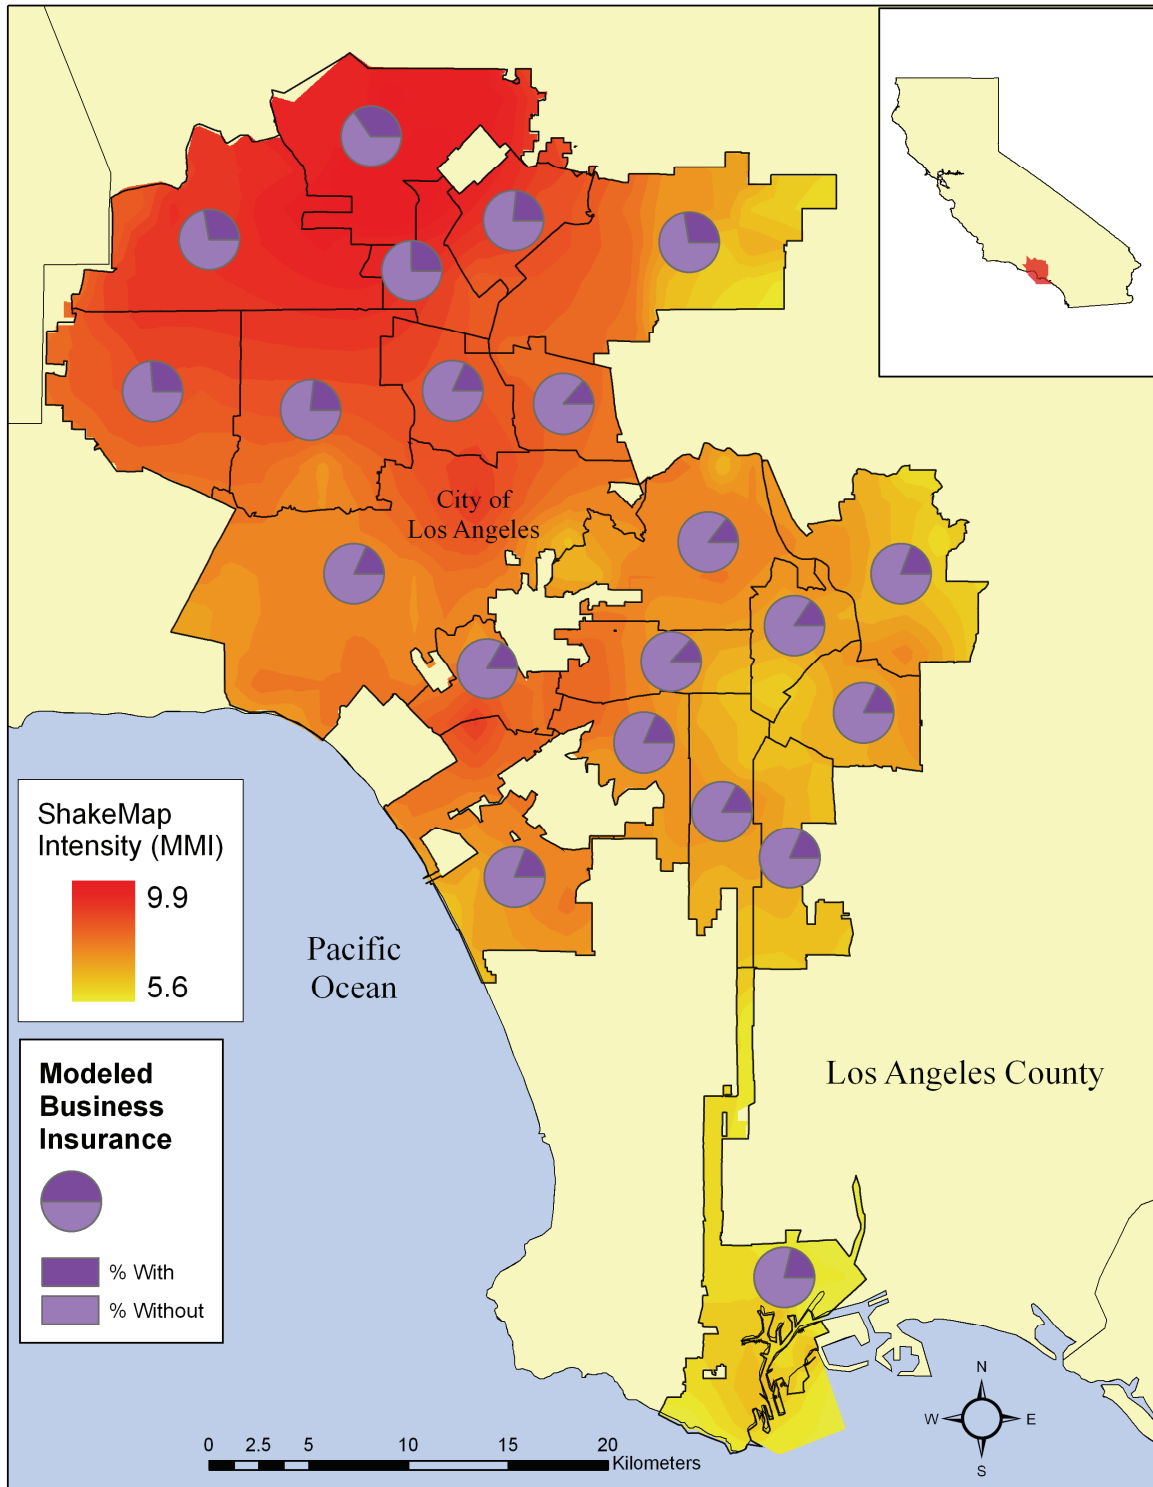


Figure 4-13 Modeled proportion of businesses with versus without insurance

No data is available that describes the immediate impact of the Northridge earthquake on demand for products and services from which to calibrate the co-event model. The median and variance of the fragility curve then were assumed such that there was a smooth transition from no effect on business demand at MMI=7 to complete disruption at MMI=10+. The median for the lognormal cumulative distribution function is 2.1, while the variance is 1. Figure 4-14 is a plot of business demand reduction versus shaking intensity; Figure 4-15 shows this information in map form.

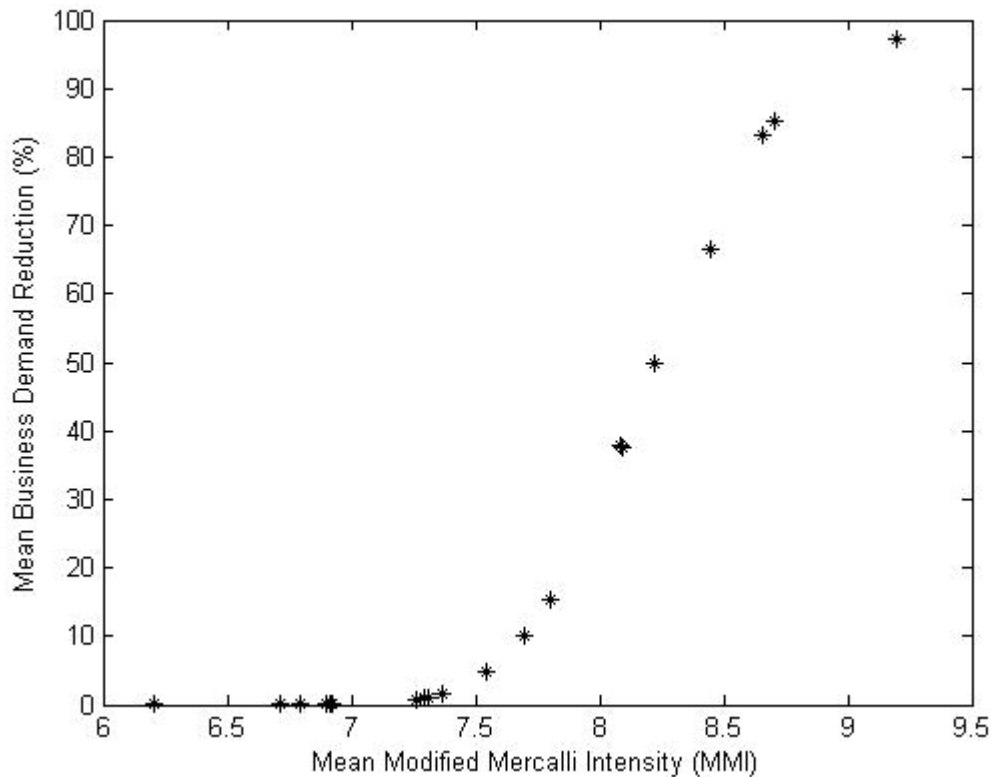


Figure 4-14 Modeled relationship between mean business demand reduction (injury) and mean Modified Mercalli Intensity (average over each study unit)

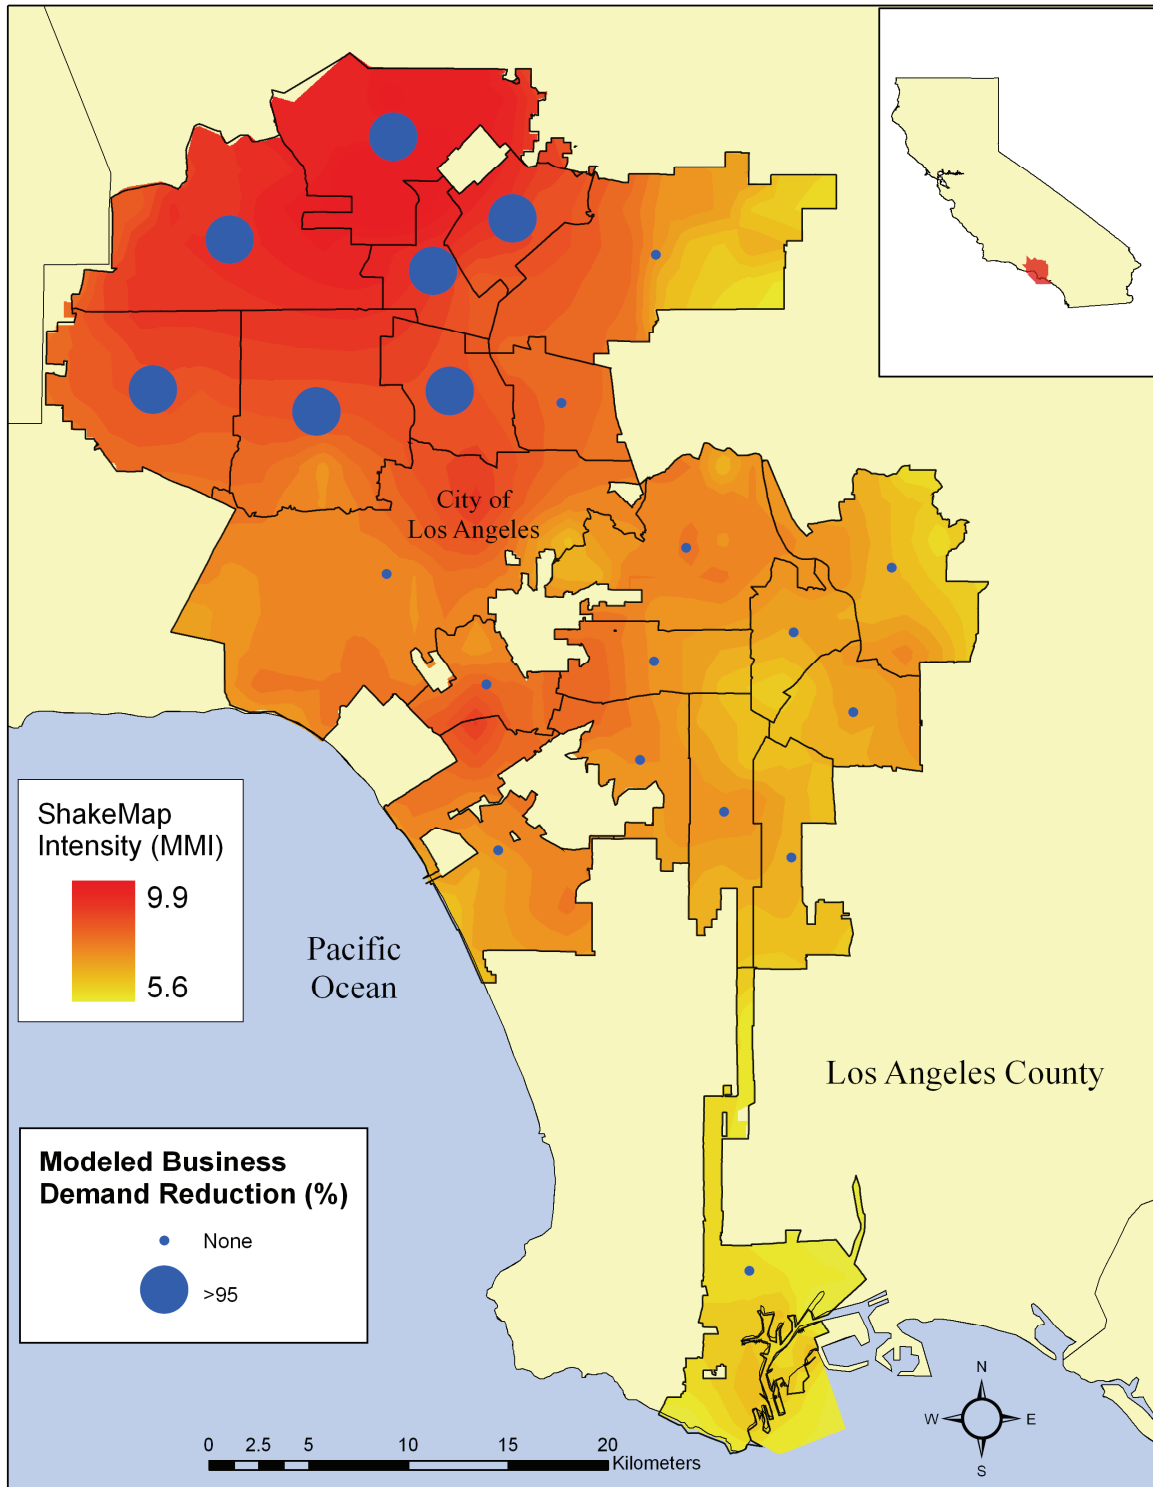


Figure 4-15 Modeled level of consumer demand reduction for businesses

SECTION 5

POST-EVENT MODEL CALIBRATION AND RESULTS

With the co-event model calibrated with respect to the Northridge disaster, the outputs were used to apply the post-event model in order to calibrate and evaluate it. Similarly to calibration of the co-event model, the components of the post-event model were calibrated if suitable secondary data sources were available. For illustrative purposes and to better understand overall behavior, outputs were generated describing recovery indicators for which calibration data wasn't developed. Because of the size and complexity of the post-event model, in comparison to the co-event model, a different overall approach was taken for calibration and evaluation. Calibration was done on a 10% random sample of the Northridge household and business data set described in Chapter 3. After calibration was completed, the post-event model was run on a non-overlapping 30% sample of the same original data set to ensure consistent performance of the model. The calibration and evaluation of the post-event model is described below for the household sector first.

5.1 Households

The only widely available data for calibrating the household components of the post-event model are associated with residential reconstruction. The results and calibration of the household reconstruction model component are described in Section 5.1.1 below. Following this, the results of the post-event model with respect to household health recovery and estimation of debt levels due to the disaster are presented. Finally, calibration of the component that models whether each household will stay or leave after the disaster is described, together with various statistics about this particular model output that help to understand the overall behavior of the model.

5.1.1 Reconstruction

The data used for calibrating the residential reconstruction component of the post-event model were compiled from several sources (Kamel and Loukaitou-Sideris, 2004; Wu and Lindell, 2004; Comerio, 1997; Comerio, 1996; Chu, 1995). Calibration was done through visual comparison of plotted calibration data with various plots of the percent of residences rebuilt with time across the entire community (Figure 5-1 through Figure 5-6). Following the findings of Comerio (1997, 1996) and the significant influence of building type and ownership status, the emphasis for the calibration was to get the best visual fit with respect to the type of residential buildings and whether or not the residence was owner-occupied or rented. To simulate the pattern of the calibration data required modifying the model to constrain the speed of reconstruction in the early weeks after the hazard event. This was done by incorporating the restoration of the transportation network (e.g., to enable the delivery of building supplies, etc.). Also added was an absolute time component where the probability of transition increases with time over the first year after the hazard event. After this modification, the calibration was done by varying the reconstruction recovery step-size of the model component's Markov chain algorithm.

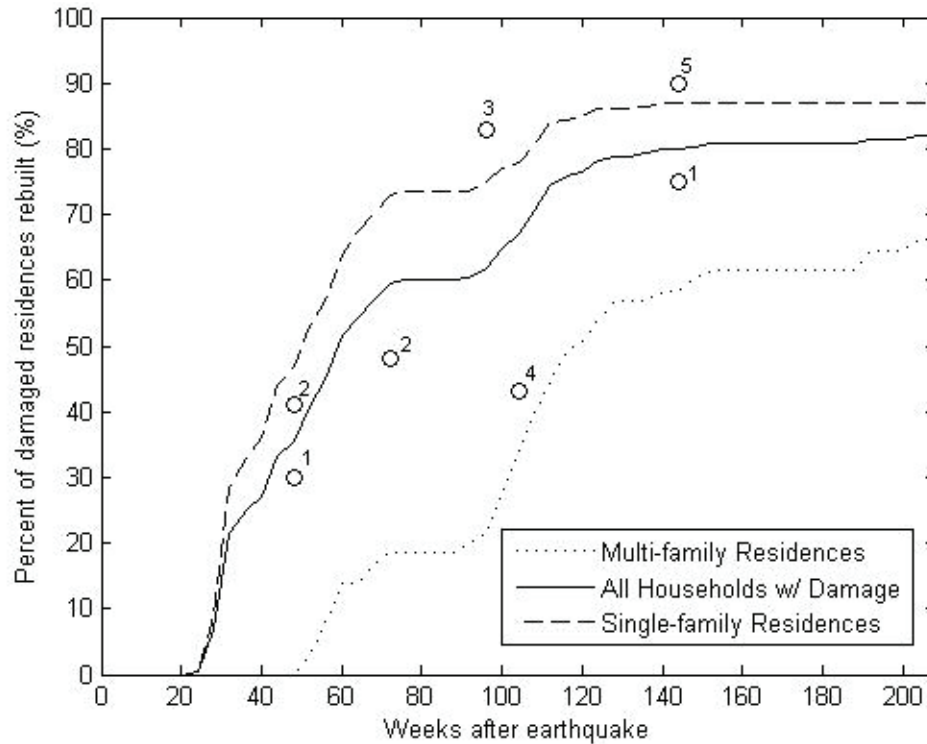


Figure 5-1 Residential reconstruction over time for all residences, multi-family, and single family, modeled using calibration input data set. Labeled circles correspond to reconstruction data from respective references. (1) Comerio (1997), (2) Chu (1995), (3) Comerio (1996), (4) Wu and Lindell (2004), (5) Kamel and Loukaitou-Sideris (2004)

The modeled reconstruction trends for MFRs and SFRs are shown in Figure 5-1. Overall, the reconstruction of the MFR stock is slower than for SFR, bounding the lower-value calibration data. While only one calibration data point (1: Comerio, 1997) is associated specifically with MFR reconstruction, post-disaster studies found a significant lag in time to repair MFR units. For example, Loukaitou-Sideris and Kamel (2004), noted that “more programs and resources were available to wealthier homeowners in neighborhoods with a larger stock of single-family housing than in poor neighborhoods with higher concentrations of rentals and multifamily apartment buildings” (p. viii). Figure 5-2 then shows the modeled trend for residential repairs with respect to higher ($INC \geq 0.5$) and lower ($INC < 0.5$) income levels. The modeled relationship between wealth and reconstruction speed is evident, exhibiting a larger positive effect than an SFR building type. The greater difference between the higher income reconstruction rate and overall trend in comparison to the lower-income trend is indicative of the fewer number of higher income households. None of the calibration data points are associated with a distinction in income. Figure 5-3 is a plot of the relative reconstruction trends associated with whether the occupant owns or rents their residence. The difference between trends is similar to that between SFR and MFR, as would be expected since MFR residents typically are renters. However, the difference in repair speed between owner-occupied and renter-occupied is modeled to be even greater than the difference between building types. Loukaitou-Sideris and Kamel (2004) found that of areas in Los Angeles with the highest damage and lowest post-disaster financial assistance there was a higher-than-average percentage of renter-occupied units.

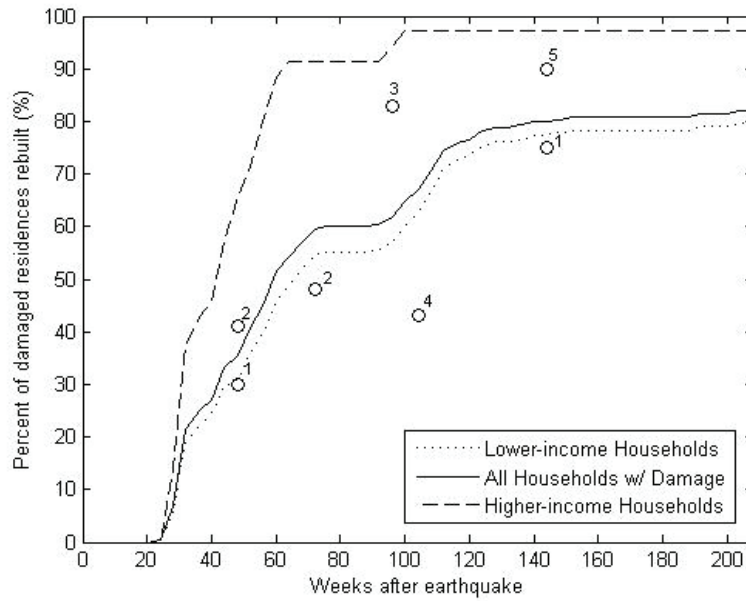


Figure 5-2 Residential reconstruction over time for all residences, residences with lower incomes ($INC < 0.5$), and residences with higher incomes ($INC \geq 0.5$), modeled using calibration input data set. Labeled circles correspond to reconstruction data from respective references. (1) Comerio (1997), (2) Chu (1995), (3) Comerio (1996), (4) Wu and Lindell (2004), (5) Kamel and Loukaitou-Sideris (2004)

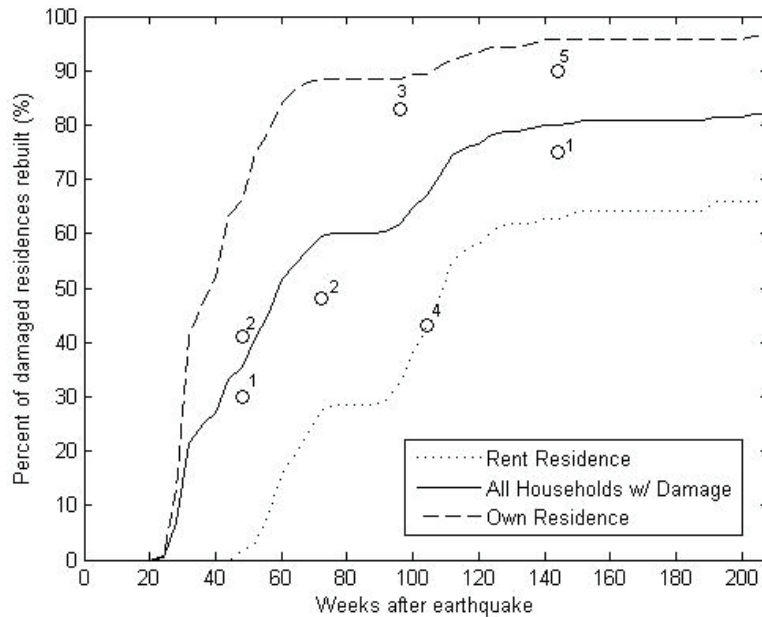


Figure 5-3 Residential reconstruction over time for all residences, households that rent, and households that own, modeled using calibration input data set. Labeled circles correspond to reconstruction data from respective references. (1) Comerio (1997), (2) Chu (1995), (3) Comerio (1996), (4) Wu and Lindell (2004), (5) Kamel and Loukaitou-Sideris (2004)

After calibrating the model on the calibration data set—a randomly chosen 10% of the data records of the full Northridge input data set—the post-event model was applied to a different set of data records from the full input data set (30% uniform random sample). Figure 5-4 through Figure 5-6 show the reconstruction trends modeled using the non-calibration data sample for building type, income, and ownership status, respectively. The modeled trends are generally similar to those computed with the calibration data set (Figure 5-1 through Figure 5-3), suggesting that the random calibration data set is representative of the full data set.

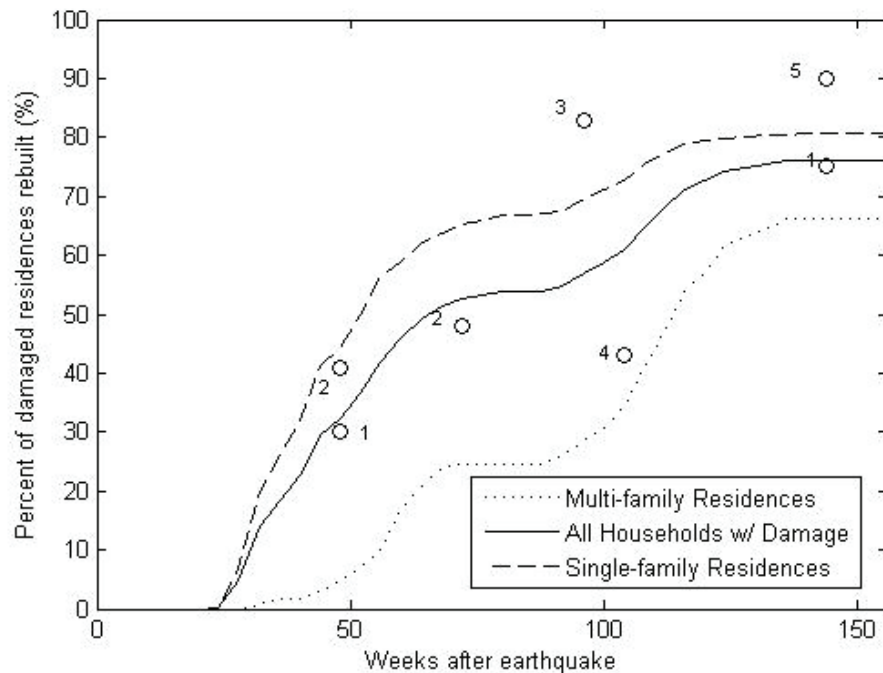


Figure 5-4 Residential reconstruction over time for all residences, multi-family, and single family, modeled using the non-calibration data set. Labeled circles correspond to reconstruction data from respective references. (1) Comerio (1997), (2) Chu (1995), (3) Comerio (1996), (4) Wu and Lindell (2004), (5) Kamel and Loukaitou-Sideris (2004)

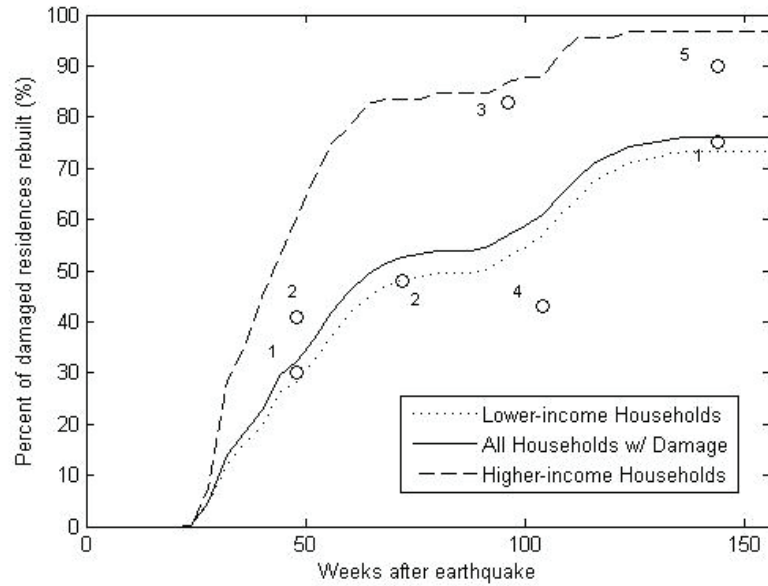


Figure 5-5 Residential reconstruction over time for all residences, households with lower incomes ($INC < 0.5$), and residences with higher incomes ($INC \geq 0.5$), modeled using the non-calibration data set. Labeled circles correspond to reconstruction data from respective references. (1) Comerio (1997), (2) Chu (1995), (3) Comerio (1996), (4) Wu and Lindell (2004), (5) Kamel and Loukaitou-Sideris (2004)

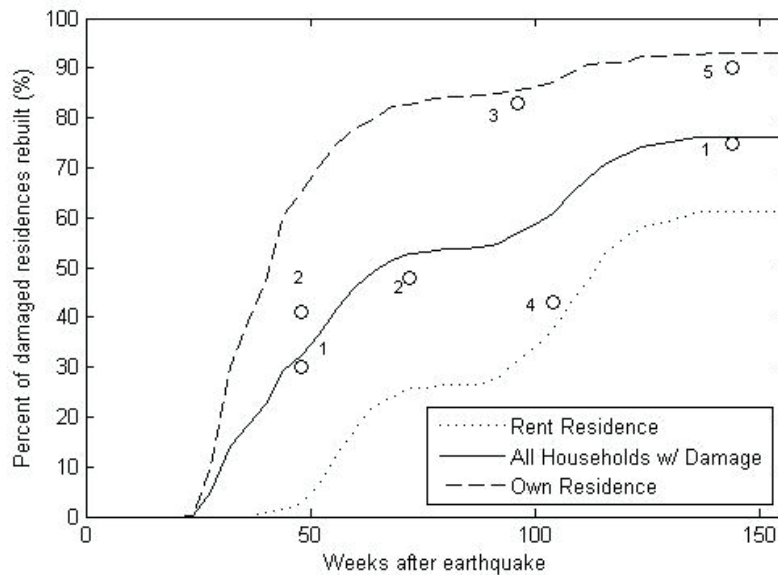


Figure 5-6 Residential reconstruction over time for all residences, households that rent, and households that own, modeled using the non-calibration data set. Labeled circles correspond to reconstruction data from respective references. (1) Comerio (1997), (2) Chu (1995), (3) Comerio (1996), (4) Wu and Lindell (2004), (5) Kamel and Loukaitou-Sideris (2004)

The results of the calibrated post-event model were analyzed and mapped across the Los Angeles PUMAs to further illustrate the behavior of the modeled reconstruction trends. The spatial distribution of PUMA-wide reconstruction time for all damaged residences is shown in Figure 5-7. There was no damage in PUMAs 6502, 6503, and 6521. The PUMAs associated with longer repair times (larger graduated symbols) correspond to areas with higher rates of lower incomes, MFRs and renter-occupied units (see Figures 3-1 and 3-3). In the north part of the study area (San Fernando Valley), there is also a relatively high proportion of lower-income residents, but a much lower rate of both MFRs (and corresponding damage) and renter-occupied units.

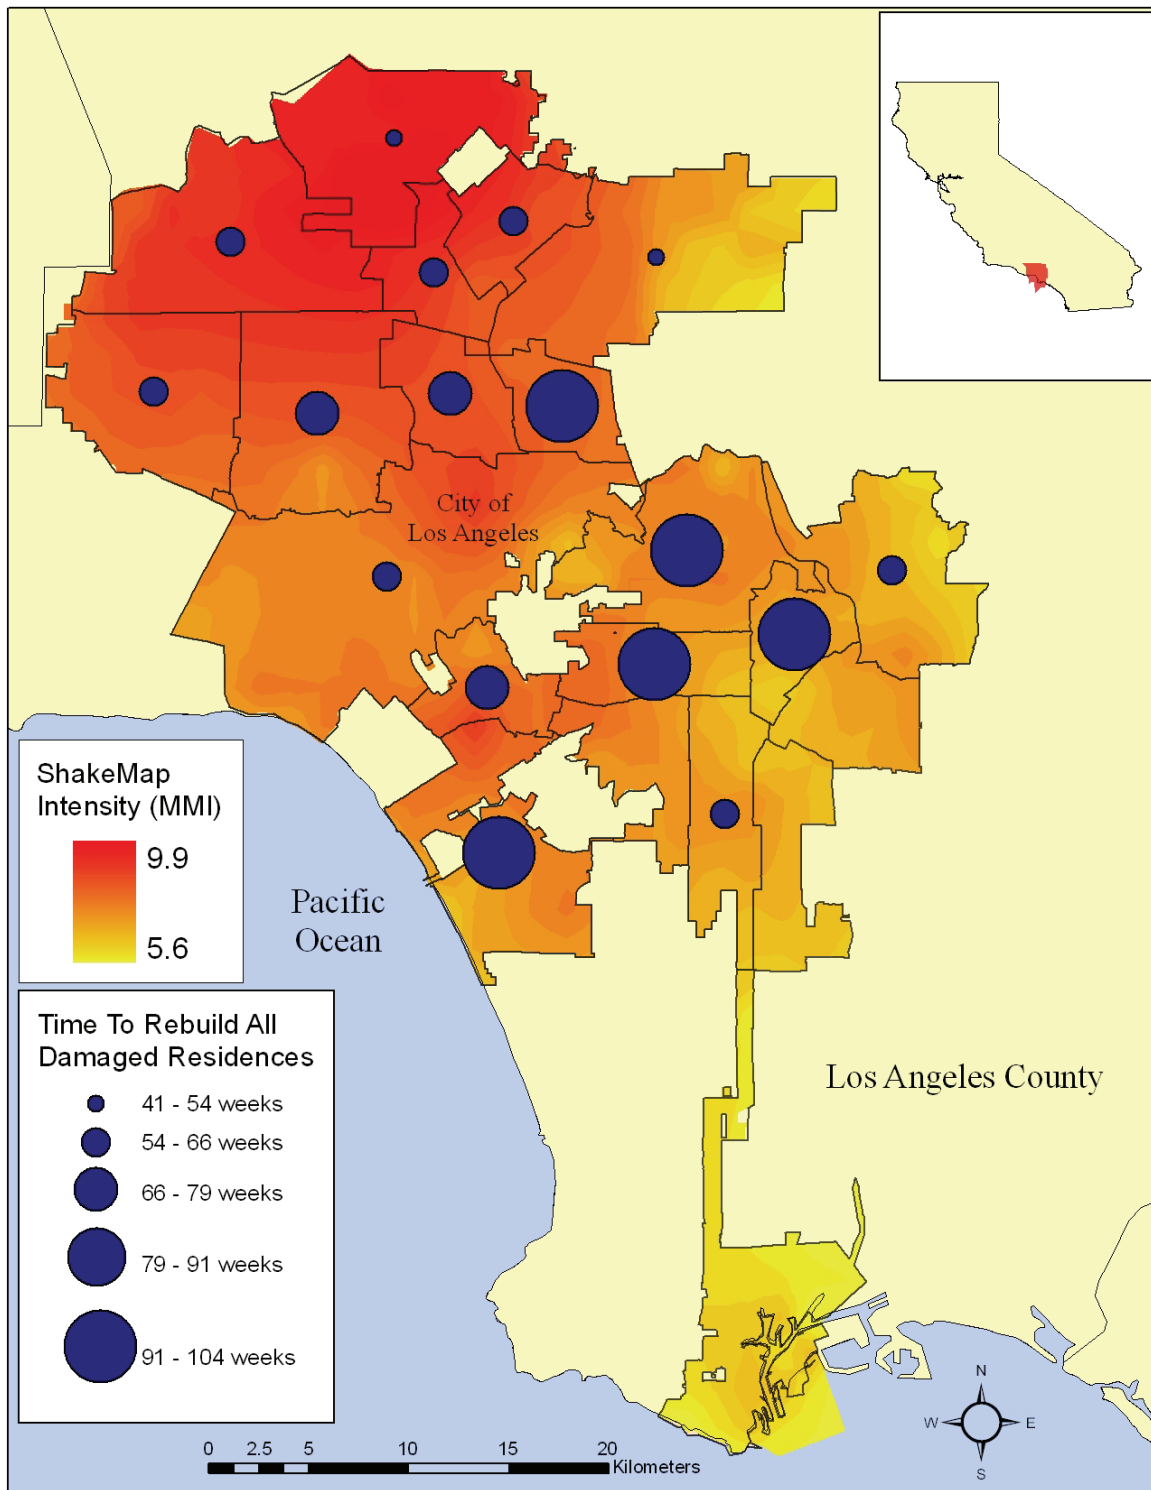


Figure 5-7 Map showing time to rebuild all damaged residential buildings within each PUMA unit. PUMAs 6502, 6503, and 6521 had no damage, other PUMAs without a graduated symbol have residences that have not been fully repaired

5.1.2 Health

The health component of the post-event model was not calibrated due to a lack of suitable data (that we are aware of) for comparison from secondary sources. The spatial distribution of modeled health recovery is shown in Figure 5-8. The differences in the time for all residences to recover their health across Los Angeles PUMAs largely correspond to the distribution of incomes. It is important to note that the modeled number and extent of injuries is quite low in all PUMAs (Figure 4-5). In the future, it is necessary to develop a health recovery dataset in order to calibrate the actual health recovery times computed by the post-event model.

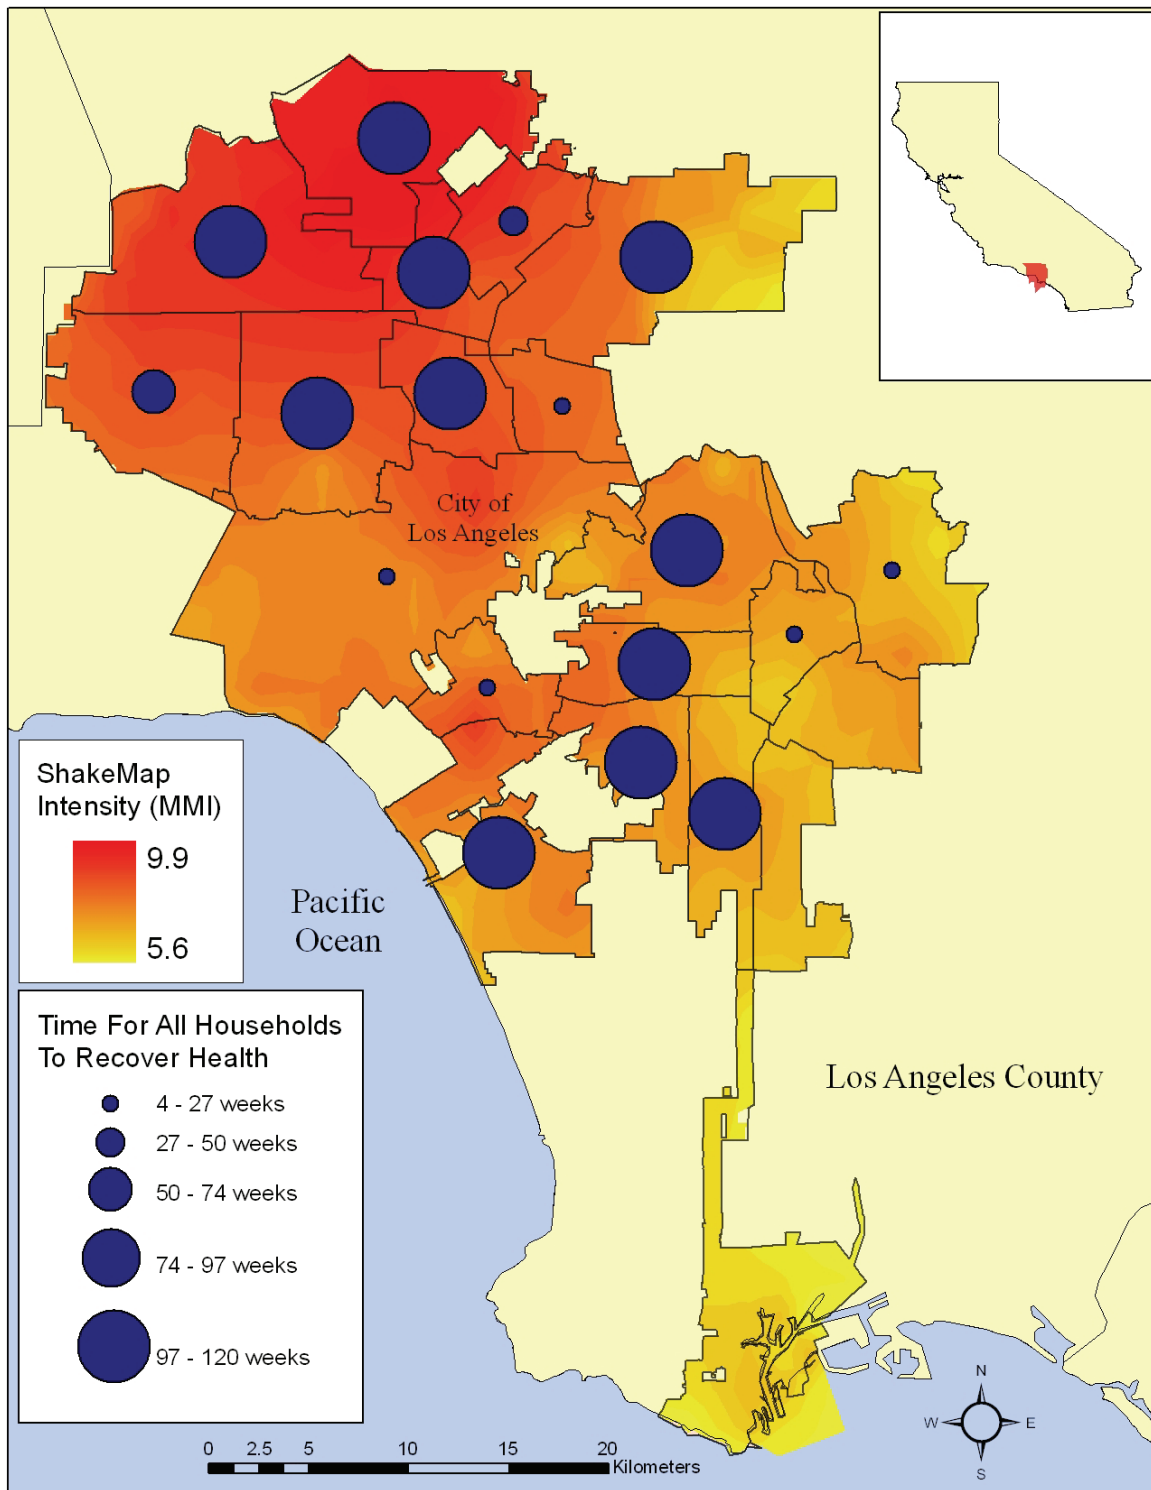


Figure 5-8 Map showing time to complete health recovery for all residents in each PUMA

5.1.3 Debt

Household debt is another component of the post-event model that has not yet been calibrated due to secondary data-source limitations. The modeled results for household debt across Los Angeles using the post-event model are shown in Figure 5-9. The model currently only represents debt specifically related to loans taken out to repair owner-occupied residences. This partly explains the modeled spatial distribution of initial debt levels. Areas with a high percentage of renters will not be modeled to incur a high rate of debt for repairing owner-occupied units. In areas where there is a predominance of owner-occupied units, the differences in average debt levels due to the earthquake are from damage (associated with shaking intensity and structural mitigation) and, to a lesser extent, income. High-income households are more likely to have insurance, obviating the need for taking out a loan, or can use their own savings, if they have any.

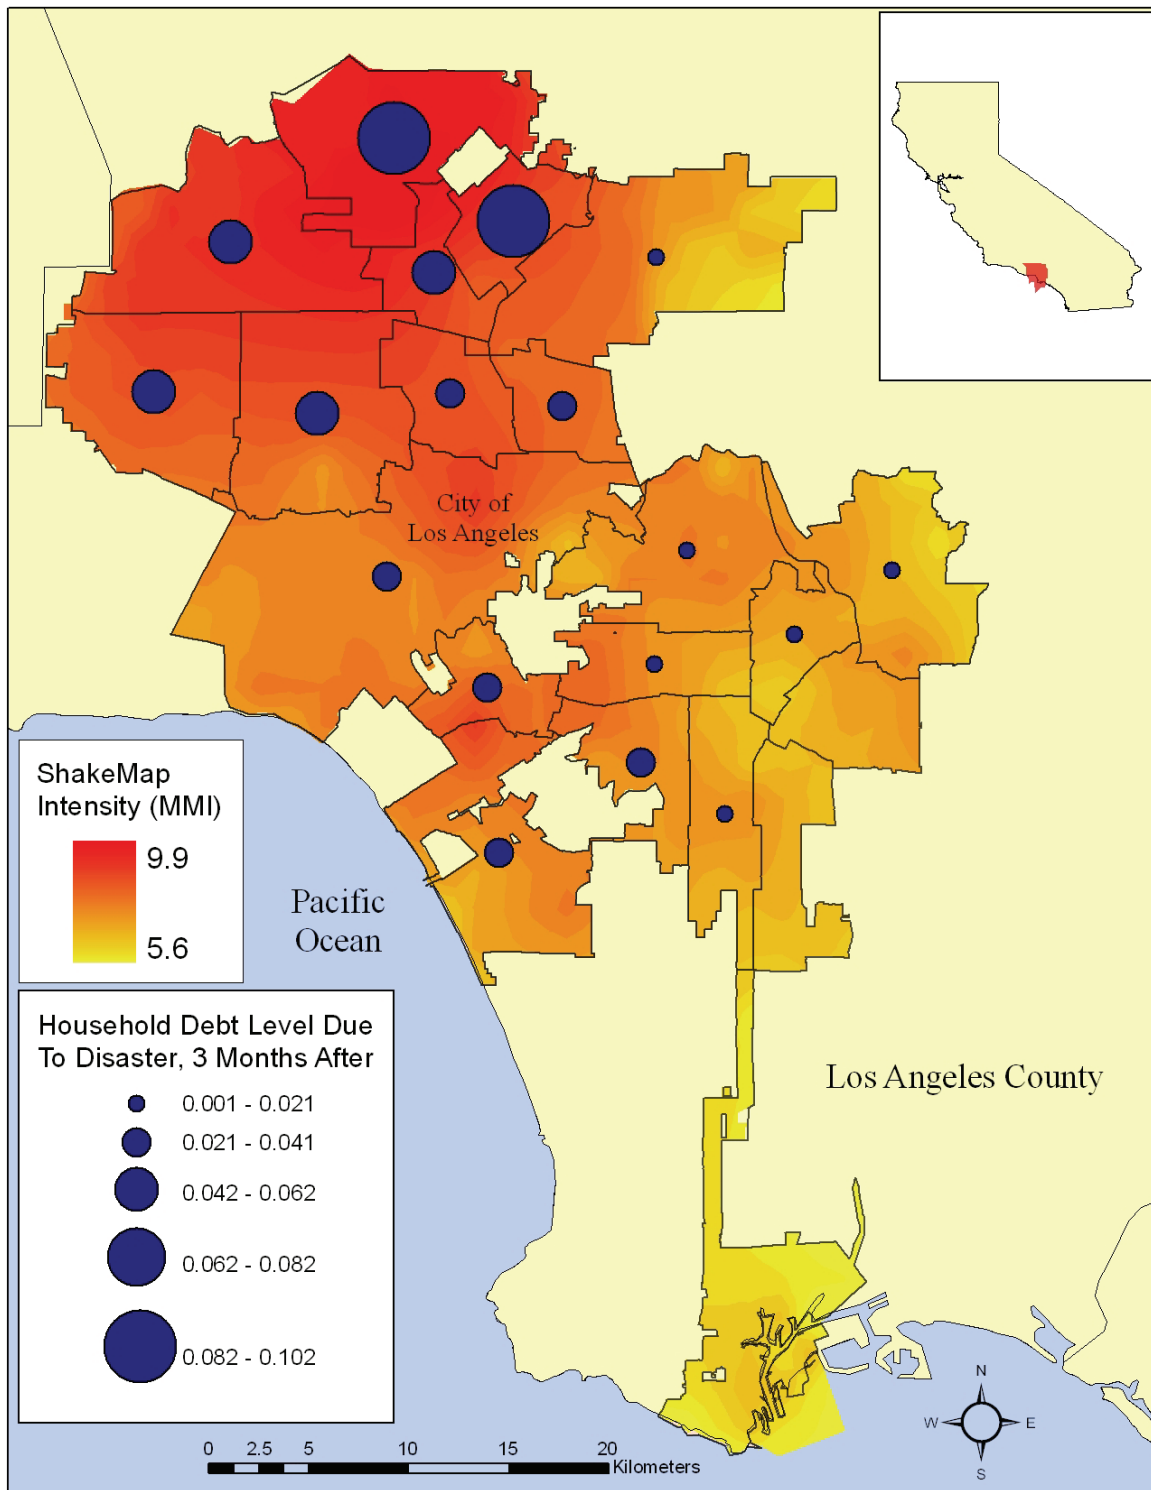


Figure 5-9 Map showing modeled initial post-disaster debt levels due to the Northridge earthquake

5.1.4 Leave

A poll conducted 18 months after the earthquake found that 91% of homeowners within the San Fernando and Santa Clarita Valleys lived in the same place as they did before the earthquake (Chu, 1995). The model was therefore calibrated so that at 18 months after the earthquake, 9.2% of all homeowners across the study area were predicted to have left their residence. Similarly, the poll found that 25% of renters in the same area had permanently moved out of their residence 18 months after the earthquake. The model was calibrated so that 25.5% of renters left their residence at the same time. Calibration of this component was done by controlling the variance of the Gaussian random number generation used for the corresponding Markov chain model. Note that the model does not currently represent where residents move to upon leaving their residences. Conceptually they could remain in the same neighborhood (PUMA), move to another neighborhood in Los Angeles, or migrate out of the area. Figure 5-10 shows the cumulative number of households in owner-occupied and renter-occupied units that were modeled to have left over time. The cumulative number of residents modeled to leave increases with time past the calibration point, but the rate at which residents leave decreases significantly at about 12 weeks after the earthquake, with the rate going to zero at about 140 weeks. Model results for this component are nearly identical for both the calibration data set and the larger non-calibration data set.

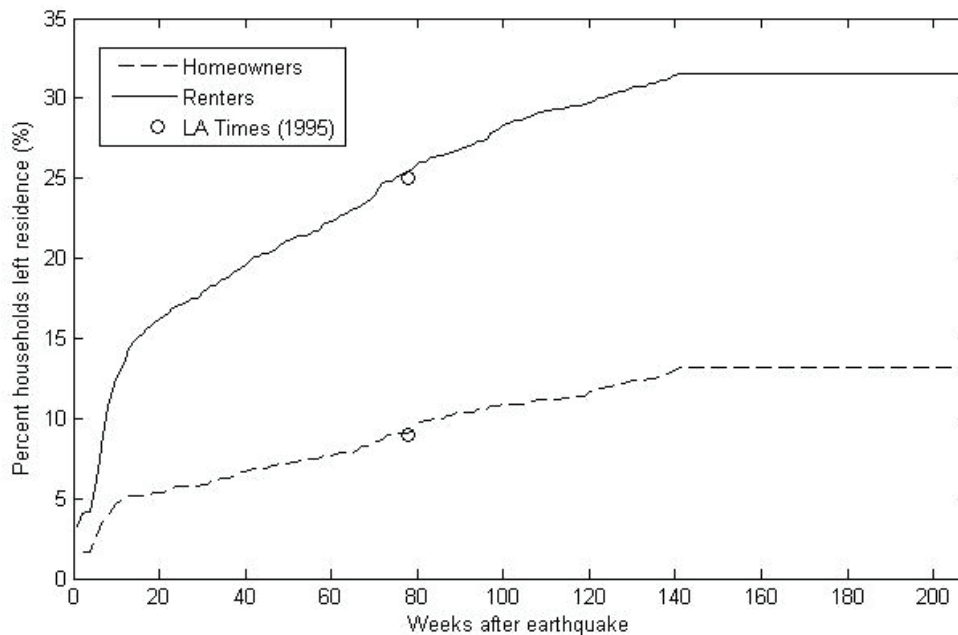


Figure 5-10 Cumulative number of homeowners and renters modeled to have left their residence over time show in comparison to data from a 1995 LA Times poll

The spatial distribution of the percentage of households leaving their residences after the earthquake is shown in Figure 5-11. The higher rate of residents leaving from the central part of Los Angeles appears largely associated with the slow rate of reconstruction. In fact Loukaitou-Sideris and Kamel (2004) found that an above-average percentage of residents, especially renters, left their residences in neighborhoods with a slow pace of reconstruction. The PUMAs with a relatively high percent of residents modeled to leave that are not in PUMAs with slow reconstruction times are associated with a slow pace of health recovery. Table 5-1 lists statistics related to those residents modeled to leave and stay, to provide insight into the relative influence of various exogenous and computed variables. The post-event component for modeling whether residents leave is the last component in the model hierarchy (for households) and thus is influenced by all other model variables. The greatest relative difference in average variable values between those residents modeled to leave and those that stay are for building type (residents of MFRs are more likely to leave), ownership (renters are more likely to leave), and having insurance (residents modeled to leave had a lower rate of insurance coverage).

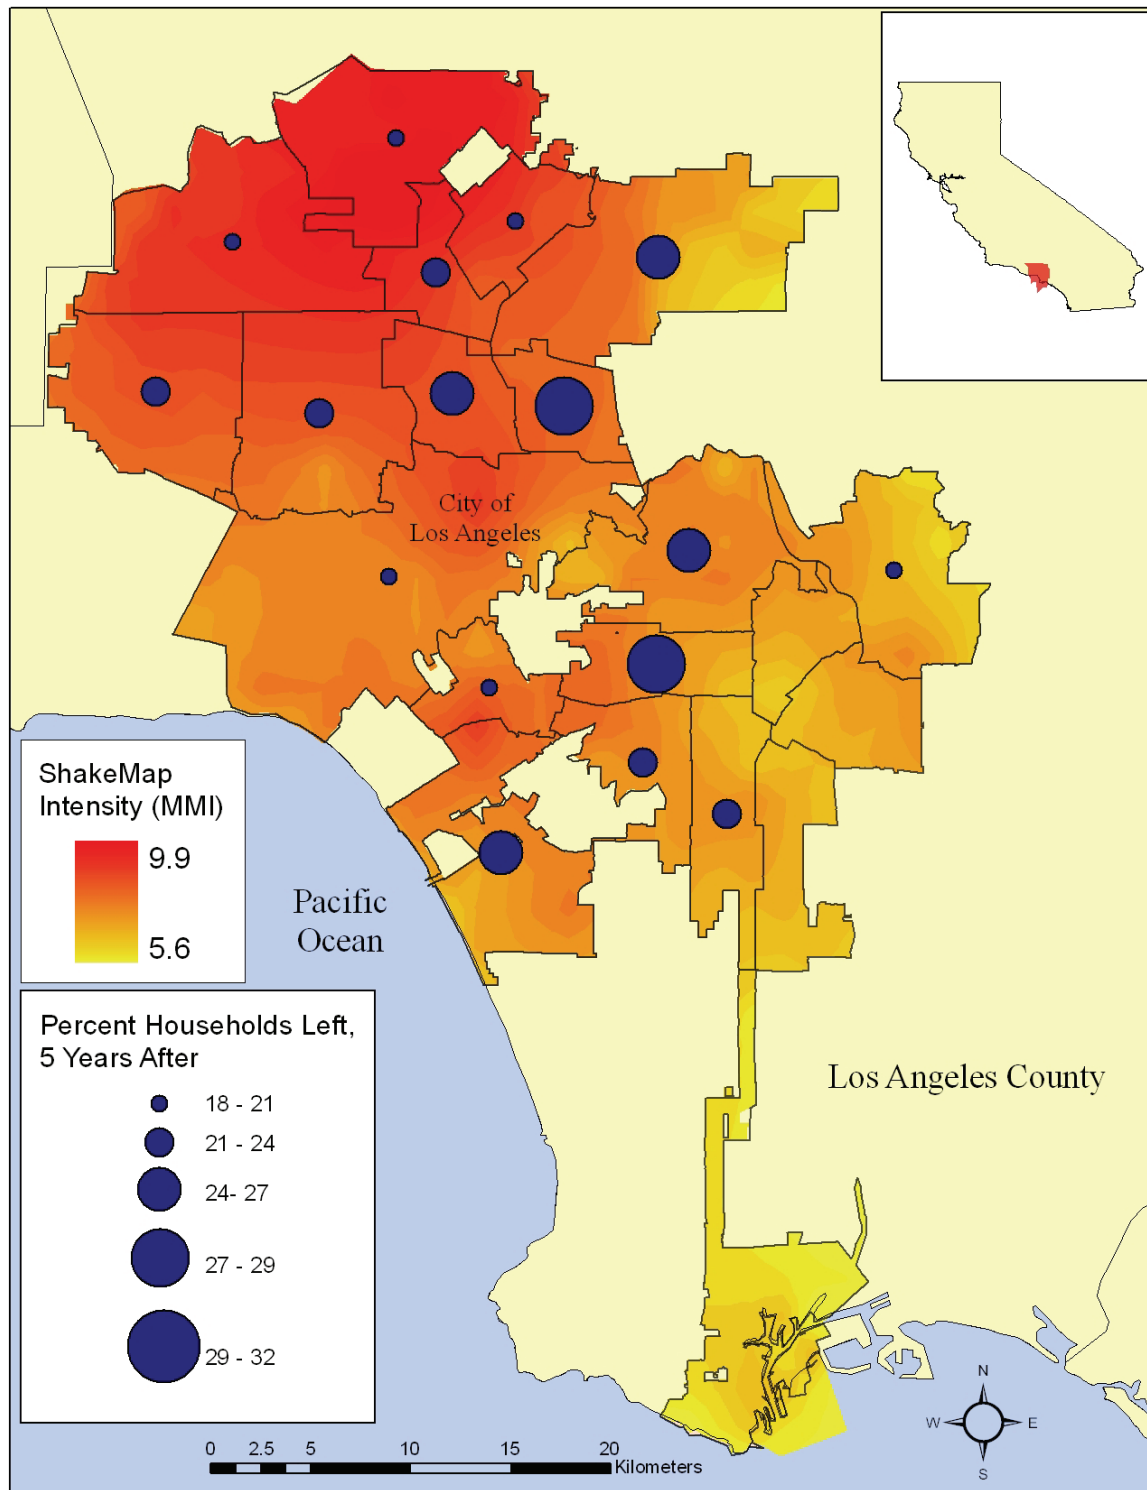


Figure 5-11 Map showing the percentage of households modeled to leave their residence as a result of the Northridge earthquake

Table 5-1 Statistics related to households modeled to leave or stay in their residence

	Left	Stayed
% Live in MFRs	62%	29%
% Renter-occupied	74%	48%
% Have insurance	6%	13%
Mean income	0.25	0.31
Mean MMI	7.4	7.5
Mean mitigation	0.21	0.19
Mean damage	0.017	0.016

5.2 Businesses

Data of varying suitability were used in calibrating three components of the post-event model with respect to business recovery. Data describing residential building reconstruction were used as a general guide for the speed of repairs for business facilities. The best available data for calibrating and evaluating the business components of the post-event model are for employment in the Los Angeles area. Data for the entire city on gross sales receipts was used to constrain the time in which business demand recovered. Components that did not have suitable secondary data-sources for calibration include business productivity level and business failure rate. Results associated with each of these components are presented after the components in which calibration was performed.

5.2.1 Reconstruction

The data used for calibrating the business-facility reconstruction component of the post-event model is the same as that used for calibrating the equivalent residential component (Kamel and Loukaitou-Sideris, 2004; Wu and Lindell, 2004; Comerio, 1997; Comerio, 1996; Chu, 1995). In fact, these data were collected for residential reconstruction, but similar secondary data-sources for commercial and industrial reconstruction were not easily available. The assumption for calibrating the business-facility reconstruction component was that the speed of repairs should be the same or slower, on average, as residential reconstruction. Calibration was done in the same way as for the residential reconstruction component, incorporating the same algorithmic modification as well.

Figure 5-12 and Figure 5-13 are plots showing the percentage of business facilities fully repaired over time for the City of Los Angeles with respect to business and facility size, respectively. Currently, the model is calibrated so that larger businesses repair their facilities much faster than smaller businesses (Figure 5-12). Notice that the reconstruction trend for small businesses is nearly identical to the trend for all businesses combined. This is because the large majority of businesses modeled within Los Angeles are small businesses. Large businesses make up less than 1% of the total number of businesses in each Los Angeles PUMA. Studies do not appear to have been done looking at the relative reconstruction speed between small and large businesses. From the standpoint of access to capital and the capacity to handle increased debt from

reconstruction loans, it is logical to expect larger businesses to have an advantage over smaller ones. However, many larger businesses will also have larger or more complex facilities, which require more time for repairs. Figure 5-13 shows the modeled reconstruction trends for businesses by facility size after the Northridge earthquake. Businesses with larger facilities (TYPE ≥ 0.5) are modeled to complete repairs significantly faster than those with smaller facilities (TYPE < 0.5). Within the model, this means that the influence of financial resources (directly related to business size) is larger than the effect of facility size. The reasonableness of this is difficult to assess for two reasons. First, there does not appear to be a specific study of how quickly businesses reconstructed damaged facilities after the Northridge earthquake, with respect to business size and facility type. Second, and likely most significantly, the simulated data for TYPE resulted in only 16 modeled businesses with TYPE ≥ 0.5 , making the model results very sensitive to the randomness of the Markov model.

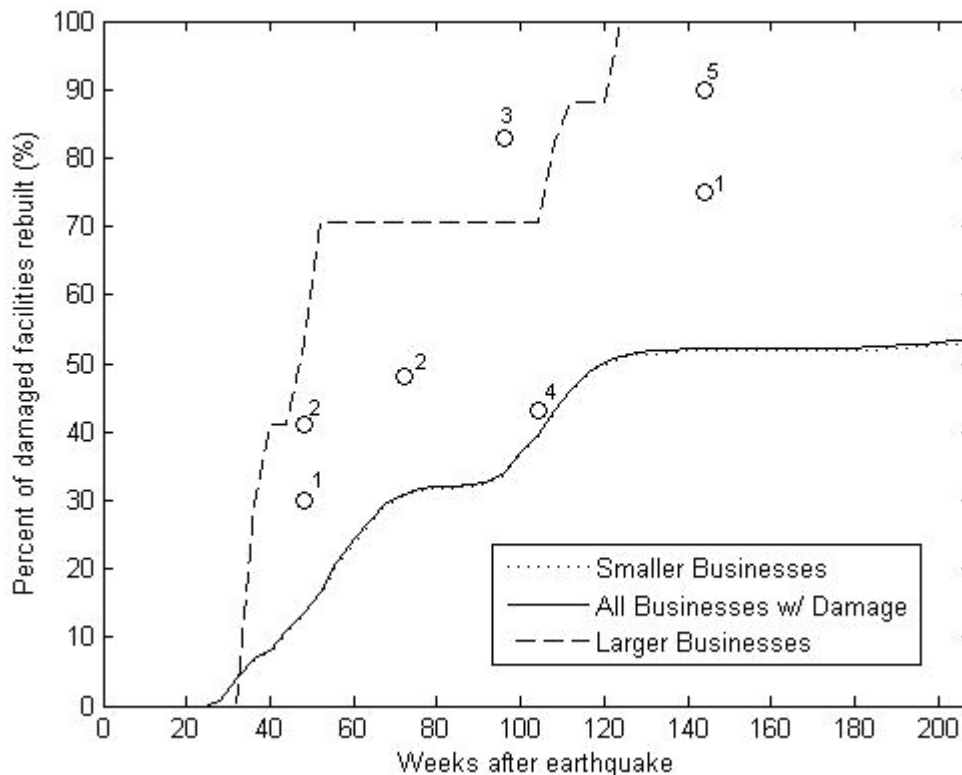


Figure 5-12 The percentage of business facilities reconstructed over time for small (SIZE < 0.5) and large (SIZE ≥ 0.5) businesses

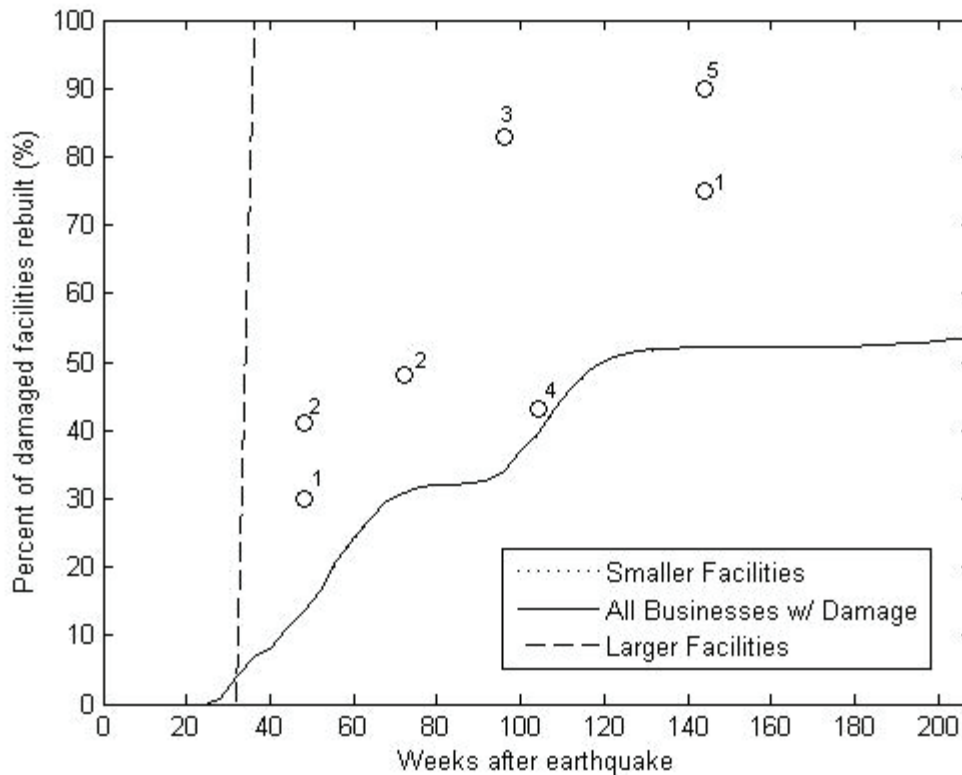


Figure 5-13 The percentage of business facilities reconstructed over time for smaller (TYPE < 0.5) and larger (TYPE ≥ 0.5) facilities

The spatial distribution of the reconstruction of business facilities is illustrated by the map in Figure 5-14. The difference between PUMAs is relatively small for most PUMAs, reflecting the large proportion of smaller locally-oriented businesses throughout the study area. The difference in the speed with which the business facilities in each PUMA were fully repaired is mostly likely associated with the number of businesses (and thus damaged facilities) within each PUMA (Figure 3-2).

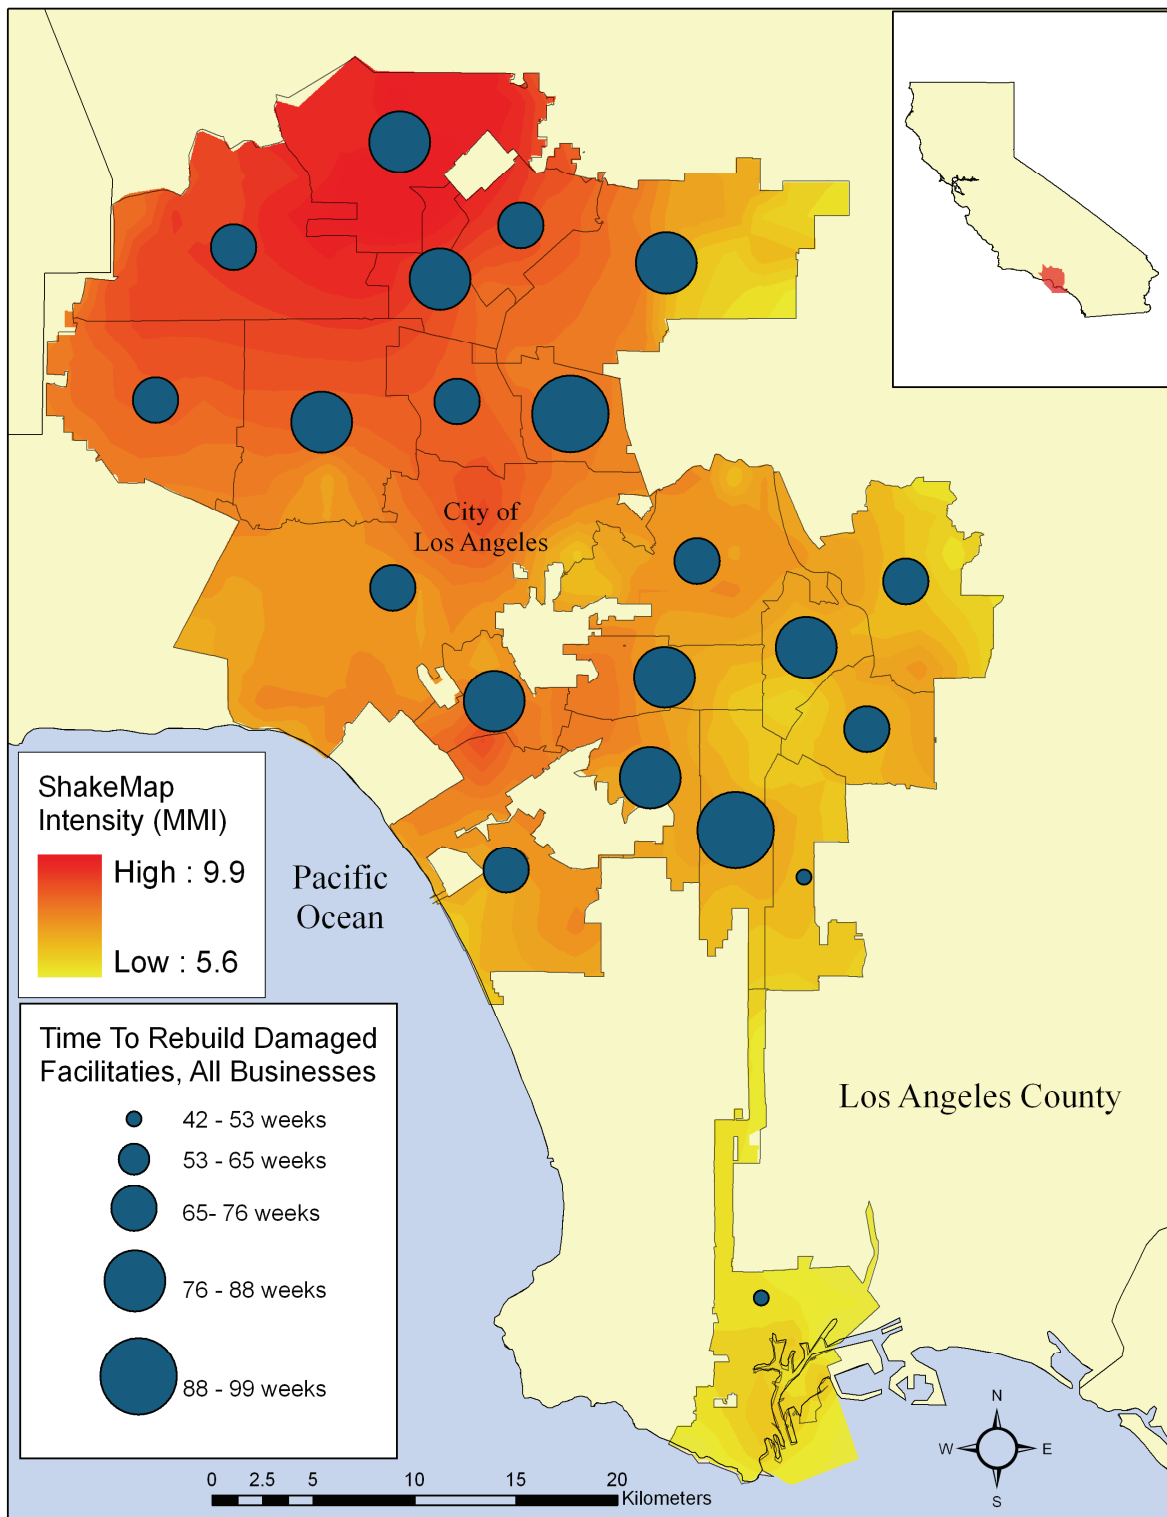


Figure 5-14 Map showing time to rebuild all damaged business facilities within each PUMA

5.2.2 Demand

No data set associated with consumer demand for businesses' products and services is readily available for calibrating the corresponding post-event component. Romero and Adams (1995) noted that total taxable sales for California dipped below pre-earthquake levels in the first quarter after the earthquake, but edged above pre-earthquake levels in the second quarter. This was used as a very general proxy for the time in which demand for businesses' products and services returned to pre-earthquake levels. This is only a fair proxy at best because taxable sales may reflect consumer purchases for an anomalous cross-section of business types, such as those associated with construction and repair. However, in lieu of better data, it provides an order of magnitude baseline for calibrating the Markov chain step-size of the demand recovery component of the model. Figure 5-15 shows a map of business demand recovery times across each PUMA. The difference in recovery times across PUMAs is likely associated with the spatial pattern of household debt level (Figure 5-9).

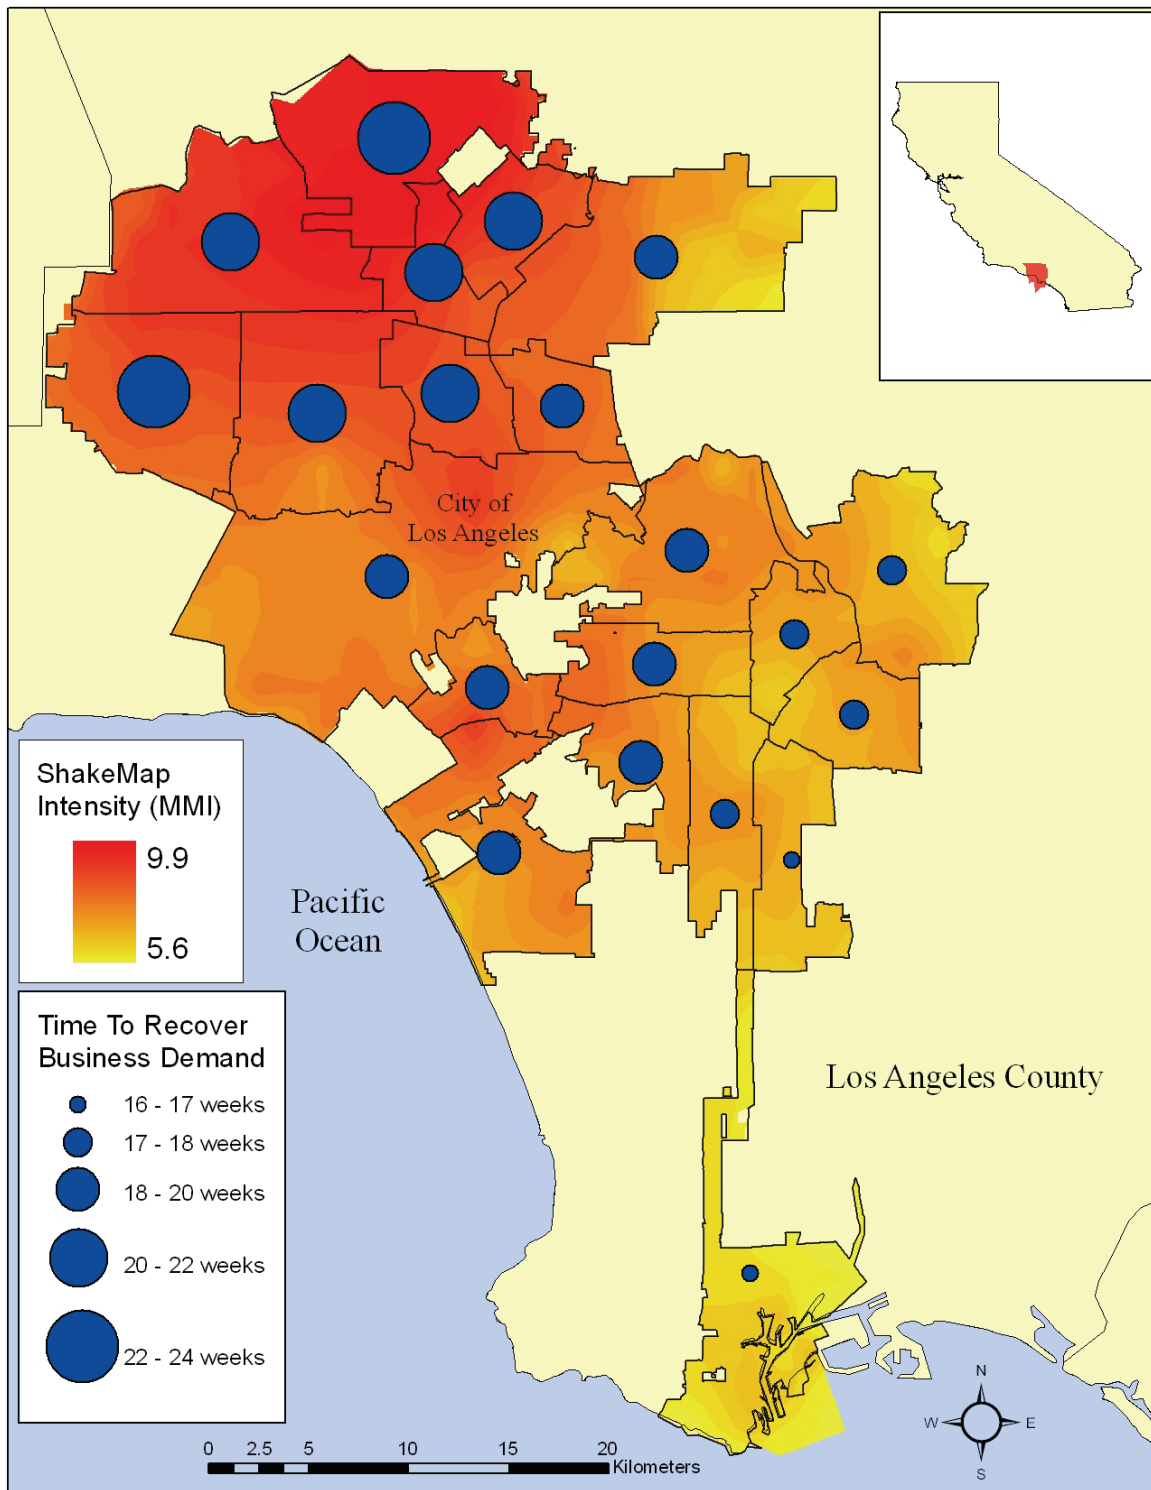


Figure 5-15 Map showing time to recover business demand for all businesses within each Los Angeles PUMA

5.2.3 Production

The map in Figure 5-16 shows a snapshot of modeled mean business production in each Los Angeles PUMA three months after the Northridge earthquake. This component of the post-event recovery model has not been calibrated against empirical data from the disaster. However, the map provides insight into the relative behavior of the productivity component, as well as influence on other post-event model components. Recovery of productivity levels lags in the northern PUMAs of Los Angeles largely due to greater overall damage in those PUMAs (Figures 4-10 and 4-11). As a general comparison, Tierney (1995) found that locally-oriented (as interpreted for this study), small businesses and those whose facilities were damaged were more likely than other businesses to report being closed for some period of time (on average 2 days) or being worse off within the first year after the earthquake. The model was run out for five years and no PUMA reached full production levels (all businesses with PROD = 1). This is likely due to households being modeled to leave their respective PUMA, which affects the household health metric and, in turn, the size and availability of the workforce.

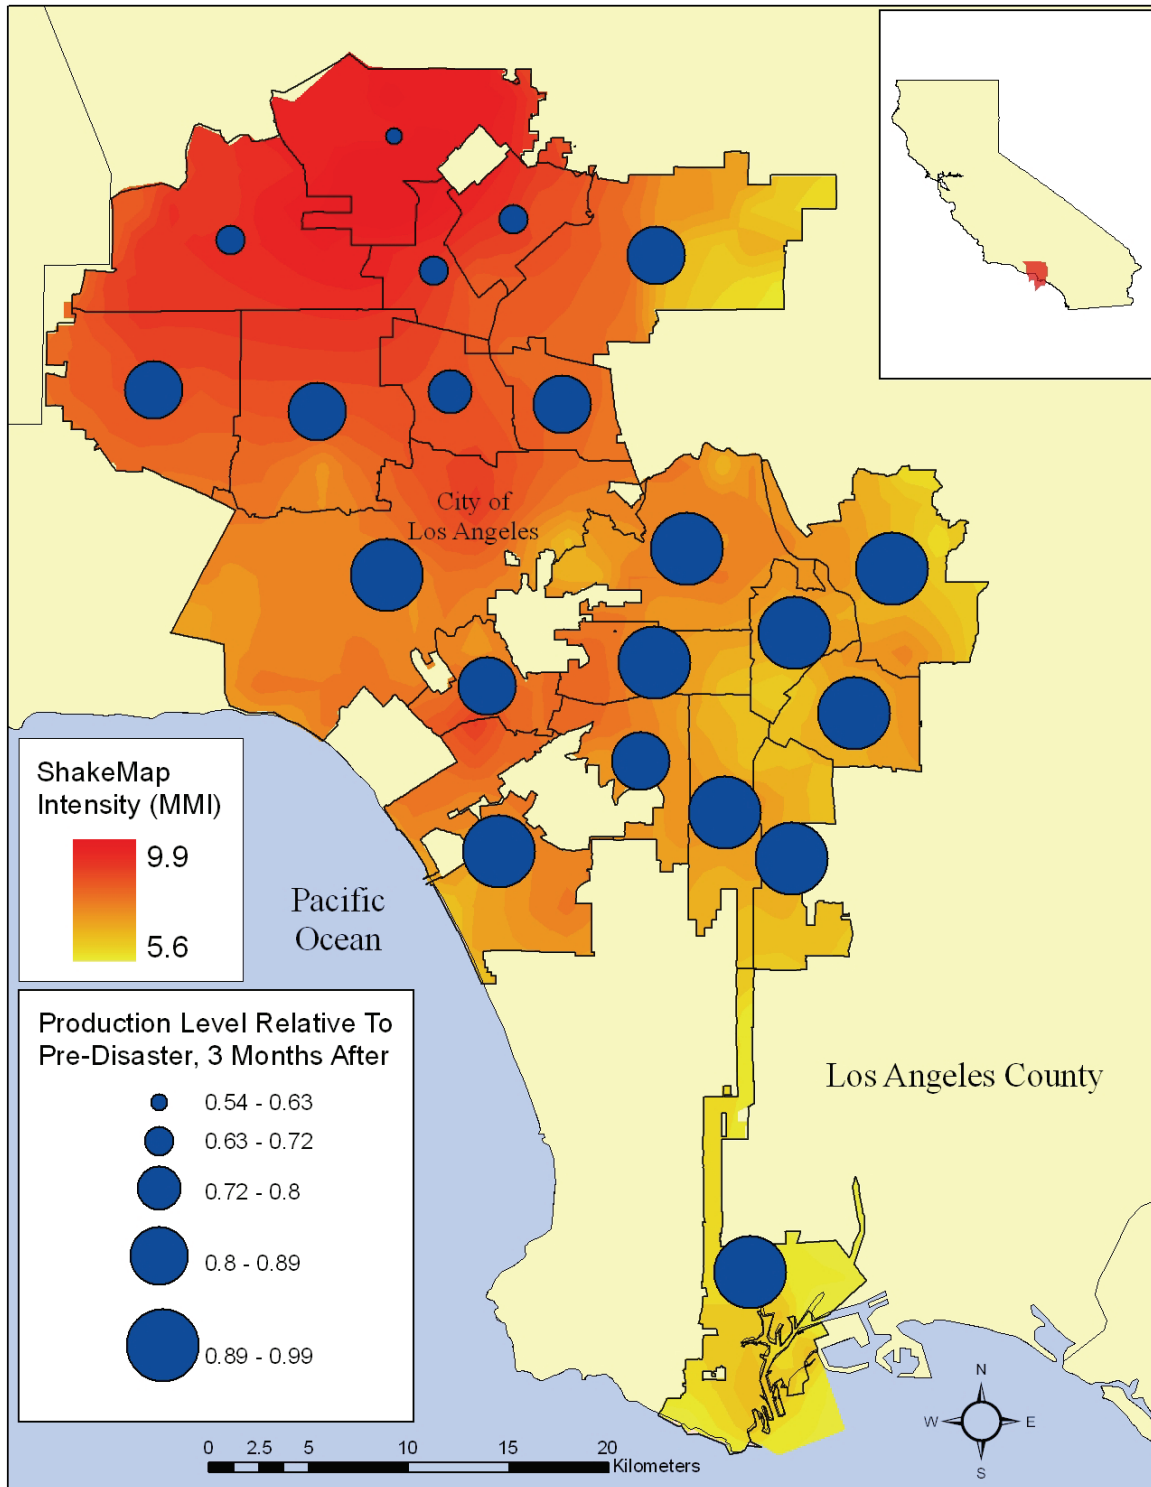


Figure 5-16 Map of relative business production levels three months after the earthquake

5.2.4 Employment

The most readily available data for evaluating the recovery model is associated with employment measures. Currently it is not possible to directly calibrate the employment component of the model, as the employment index is simply the product of the neighborhood average of demand (DEMAND) and productivity (PROD). With some difficulty, calibration can, of course, be done indirectly through those respective components. Two different data sets were available for characterizing employment after the Northridge earthquake. Gordon et al. (1995) estimated the percent of employment days lost in 1994 after the Northridge earthquake within several impact zones (SCPM zones) that coincide with the community planning areas of Los Angeles. To get a sense of the relative performance of the model across PUMAs, a comparison was made by aggregating the Gordon et al. (1995) SCPM zones to roughly correspond with one or more PUMAs—the unit of analysis for the model—resulting in six aggregate units (mapping listed in Figure). The percentages of possible employment days lost estimated by Gordon et al. (1995) were re-calculated based on aggregate counts and normalized by the mean value for the six aggregated units. If multiple PUMAs were contained in the six aggregated units of comparison, the results of the recovery model employment component (3 months after the earthquake) were averaged across the respective PUMAs. Each employment value for the six aggregated units was normalized by the mean value for the units and subtracted from 1 (to express the metric as loss). The comparison is shown in Figure 5-17. The relative employment loss across the aggregated units appears to be similar between the model results and the estimates by Gordon et al. (1995). Because the metric of the model outputs do not match the units of Gordon et al.'s (1995) estimate, the comparison is useful only to see the validity of the predictive relative geographic differences, rather than absolute employment loss.

Time series data on employment are available from the Quarterly Census of Employment and Wages or ES202 program of the Bureau of Labor Statistics. The data describe the number of covered workers who worked during, or received pay for, the pay period that includes the 12th day of the month. Historical data is provided for quarterly time intervals by zip code, based on this on-going census. The data were aggregated by PUMA and an index was calculated for four dates (April 1994, August 1994, June 1996, and December 1998) describing the ratio of the number of people employed in the particular month after the earthquake to the number of people employed that month in the year prior to the earthquake. By August 1994, all PUMAs had at least 98% of the number of workers working as were working in August 1993 (many PUMAs had more than 100%). This can be used to compare the modeled time for employment to return to pre-earthquake levels. (The recovery model does not model employment dynamics beyond reaching some pre-earthquake level.) Figure 5-18 shows the comparison between model results for 7 months after the earthquake and the ES202 data for August 1994 (approximately 7 months after the earthquake). A map of model employment levels four years after the Northridge earthquake is shown in Figure 5-19. This is output from the same model component after more time has passed, illustrating which PUMAs are lagging behind on employment recovery. The lower employment levels in the northern part of the study area (San Fernando Valley) are controlled by the modeled recovery of business productivity.

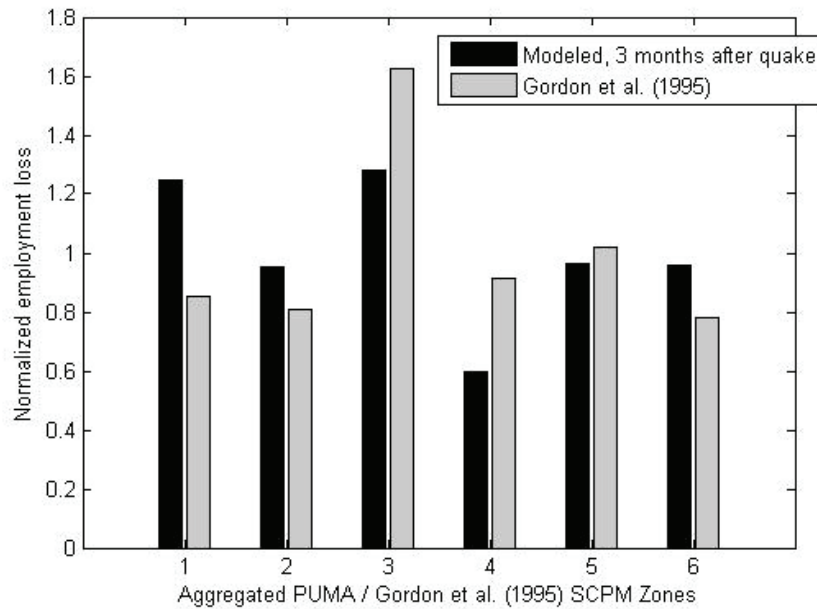


Figure 5-17 Normalized comparison of modeled reduction in employment and employment loss data from Gordon et al. (1995) for selected aggregated PUMAs. 1: PUMAs 6511, 6513, 6514, and 6515; SCPM Zones 1 and 16, 2: PUMAs 6516 and 6518; SCPM Zones 5 and 13, 3: PUMA 6517; SCPM Zone 7, 4: PUMA 6507; SCPM Zone 9, 5: PUMAs 6510 and 6512, 6: PUMAs 6504; SCPM Zone 18

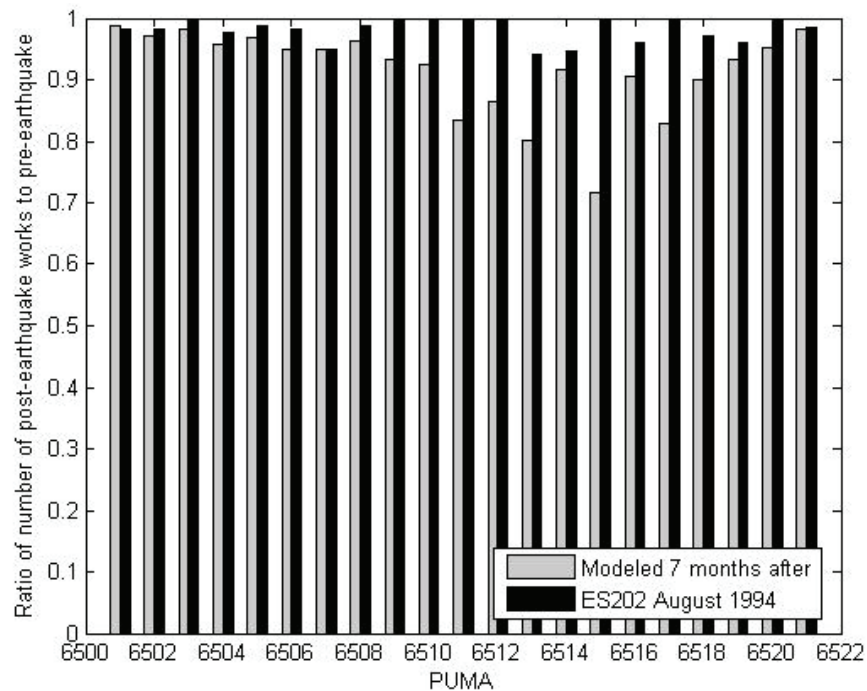


Figure 5-18 Comparison of modeled employment recovery and the ratio of the number of workers, by PUMA, in August 1994 to the number in August 1993

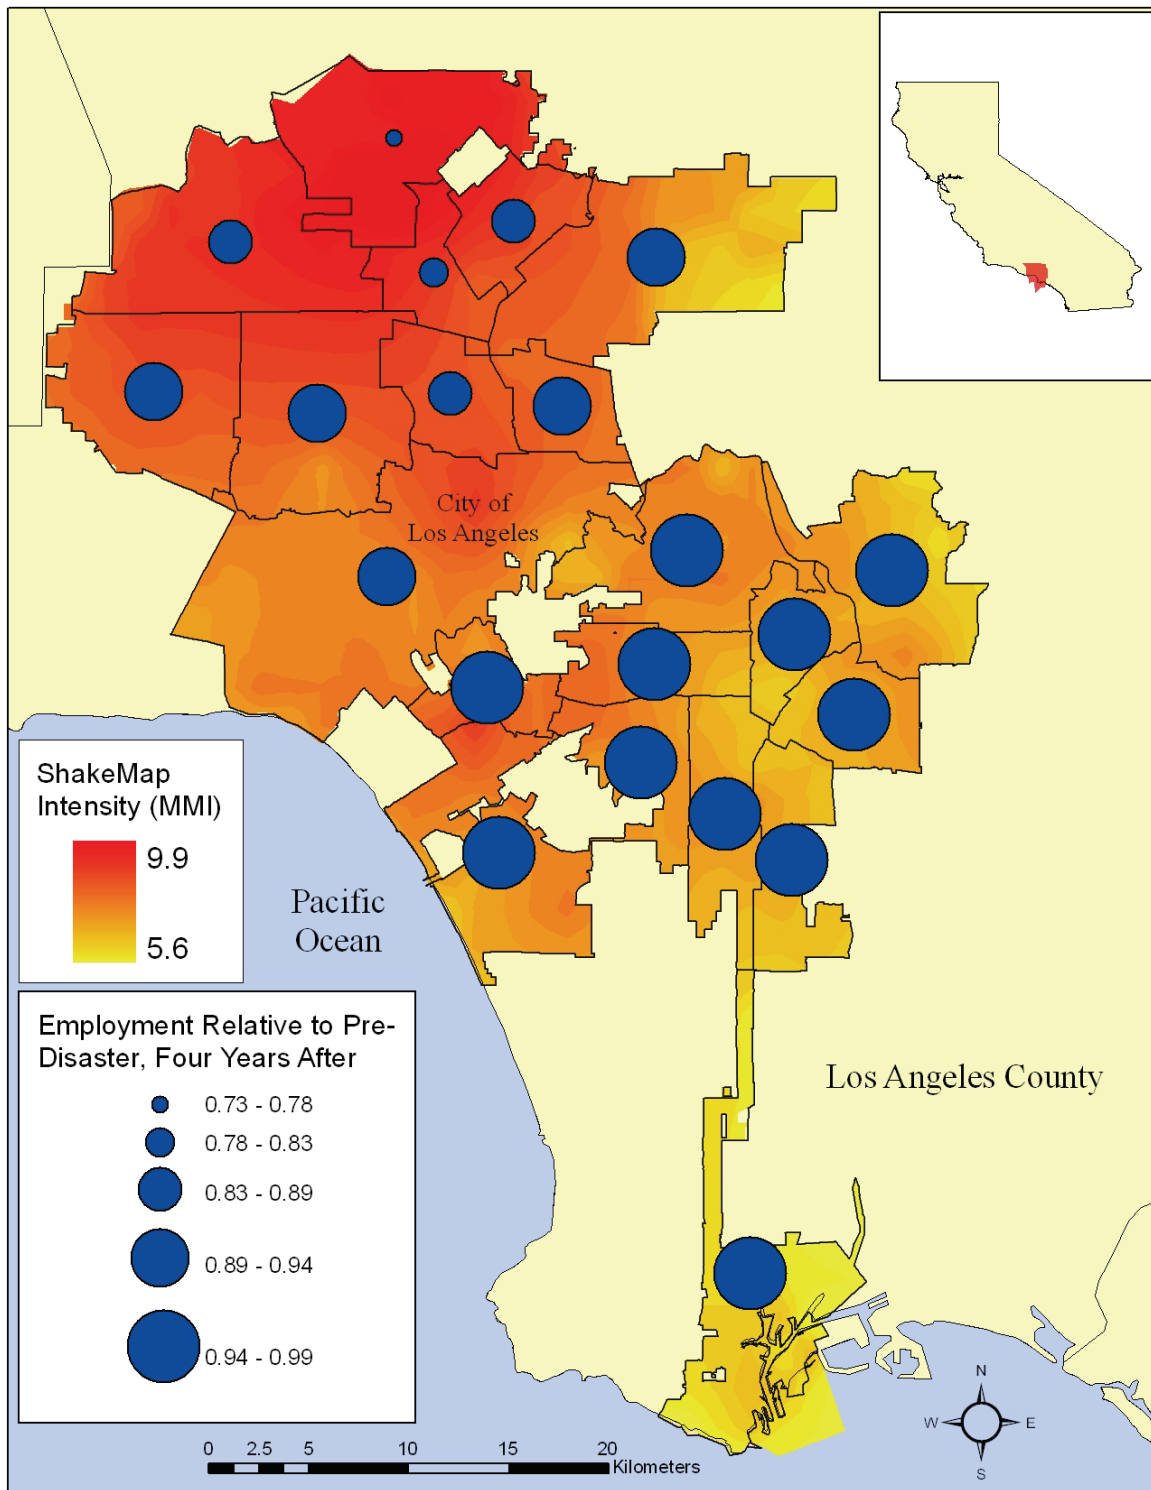


Figure 5-19 Map of modeled employment levels by PUMA four years after the Northridge earthquake relative to pre-earthquake employment

5.2.5 Debt

The post-event component for modeling business debt due to the disaster (and its elimination) is driven primarily by level of damage and the recovery levels of demand and production. For the case of the modeled Northridge application, this is illustrated by the map of average debt levels across Los Angeles (Figure 5-20). Specifically in this case, the higher damage levels and the lagging production recovery control the modeled spatial distribution of debt, where relative debt levels are higher for the PUMAs in the northern part of the study area. In other words, higher damage required larger loans for the large number of smaller businesses with fewer financial resources and the lagging production levels, partly due to a reduced workforce, resulted in less capacity to pay off the loans quickly. The business debt component of the post-event model was not calibrated because of a lack of a suitable secondary data-source. But again the observation of Tierney (1995) is relevant, that locally-oriented, small businesses and those that suffered physical damage were more likely to report being worse off a year after the earthquake.

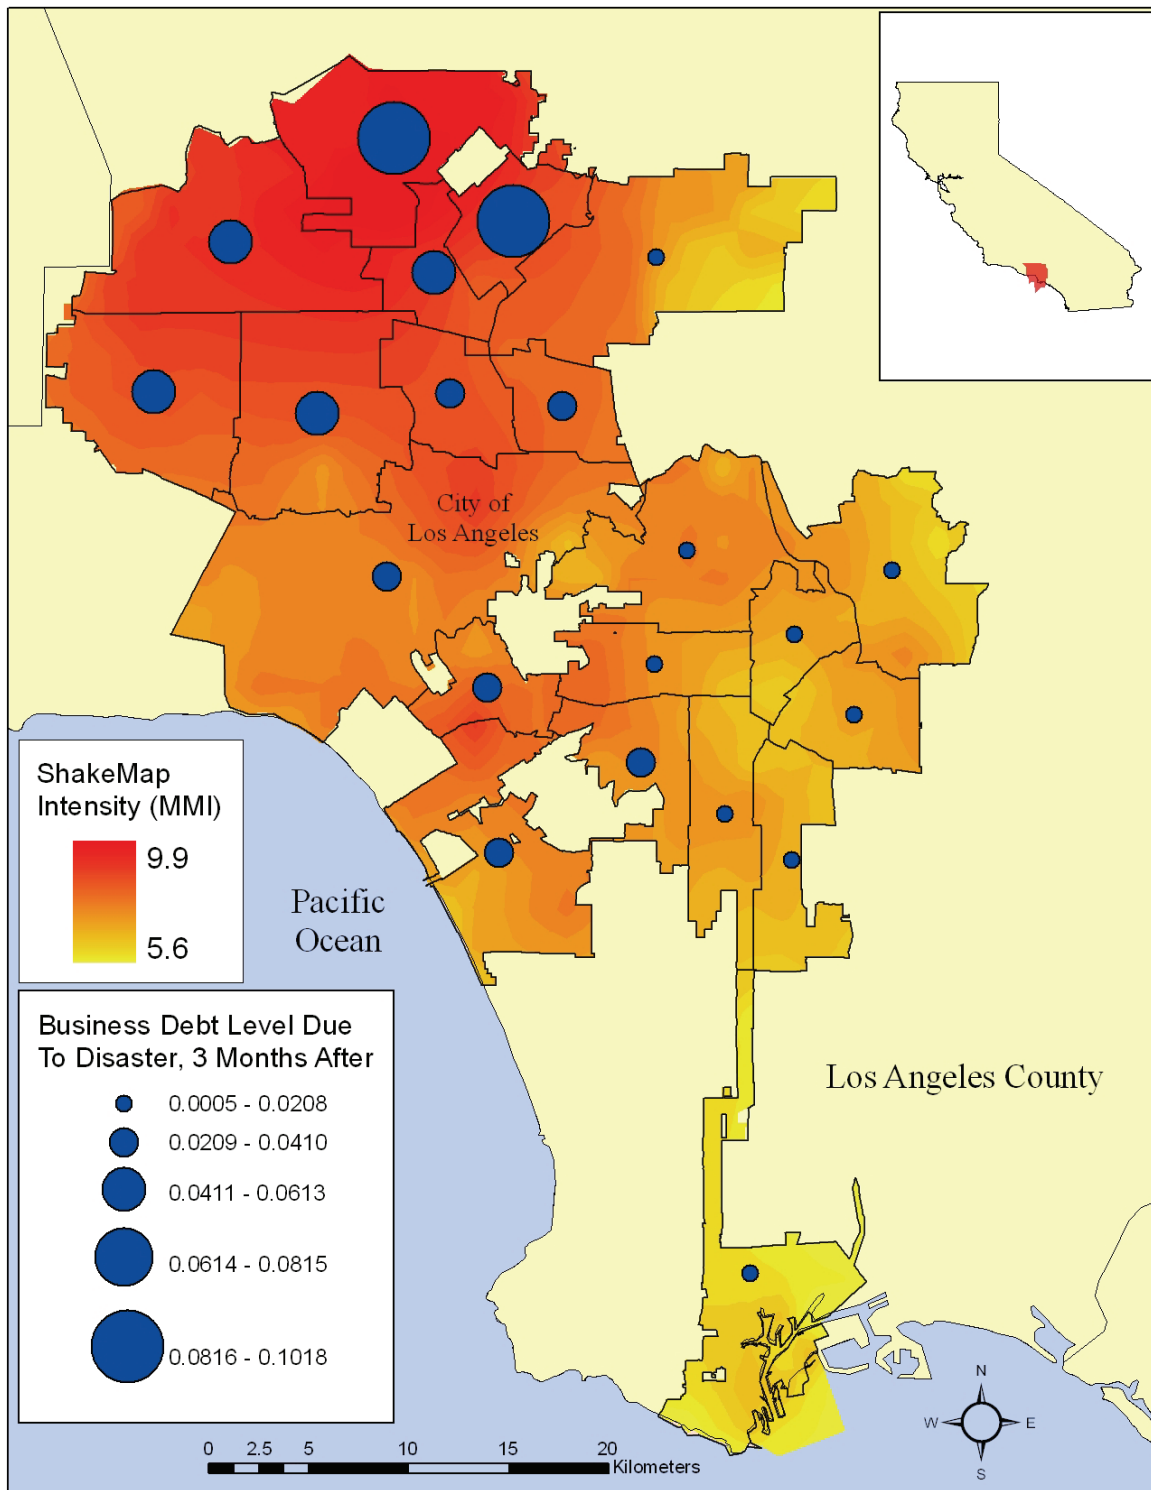


Figure 5-20 Map of average debt levels due to the Northridge earthquake disaster for each Los Angeles PUMA

5.2.6 Failure

General observations from studies about business failure resulting from the Northridge earthquake are useful to calibrate the failure component of the post-event model. Calibration was done by changing the variance value in the Gaussian random number generator of the Markov chain. Figure 5-21 shows the calibrated modeled rate of business failure due to the earthquake as a percentage of all business in Los Angeles. The rate of failure significantly drops after about 20 weeks and failures stop completely after 140 weeks (2 years, 9 months). The period of business failure is consistent with the findings of Petak and Elahi (2001), who observed that small businesses were still failing two years after the earthquake. The map in Figure 5-22 shows the spatial distribution of modeled business failures five years after the Northridge earthquake. The higher rate of failures in the San Fernando Valley PUMAs (northern PUMAs) illustrates the influence of business debt levels, and thus business production and damage levels in the respective PUMAs. While Tierney (1995) found that businesses that suffered physical damage were more likely to report being worse off after the Northridge earthquake, Petak and Elahi (2001) note in their study that damage is not a reliable predictor of business failure. The strong influence of damage on the business failure component of the post-event model is clear from the statistics listed in Table 5-2. Modeled businesses are also more likely to fail if they are locally-oriented, and if they don't have insurance or didn't structurally mitigate their facilities. Petak and Elahi (2001), in fact, found that the rate of business failure varied between locally-oriented (e.g., retail and service) and export-oriented (e.g., manufacturing) sectors, with locally-oriented businesses experiencing more failures.

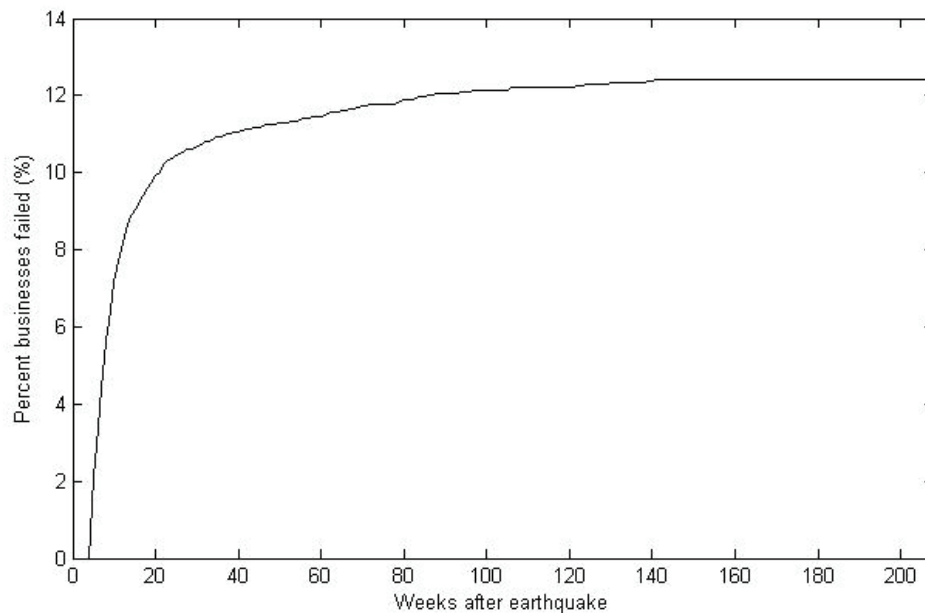


Figure 5-21 Modeled rate of business failure as a percentage of all business in Los Angeles

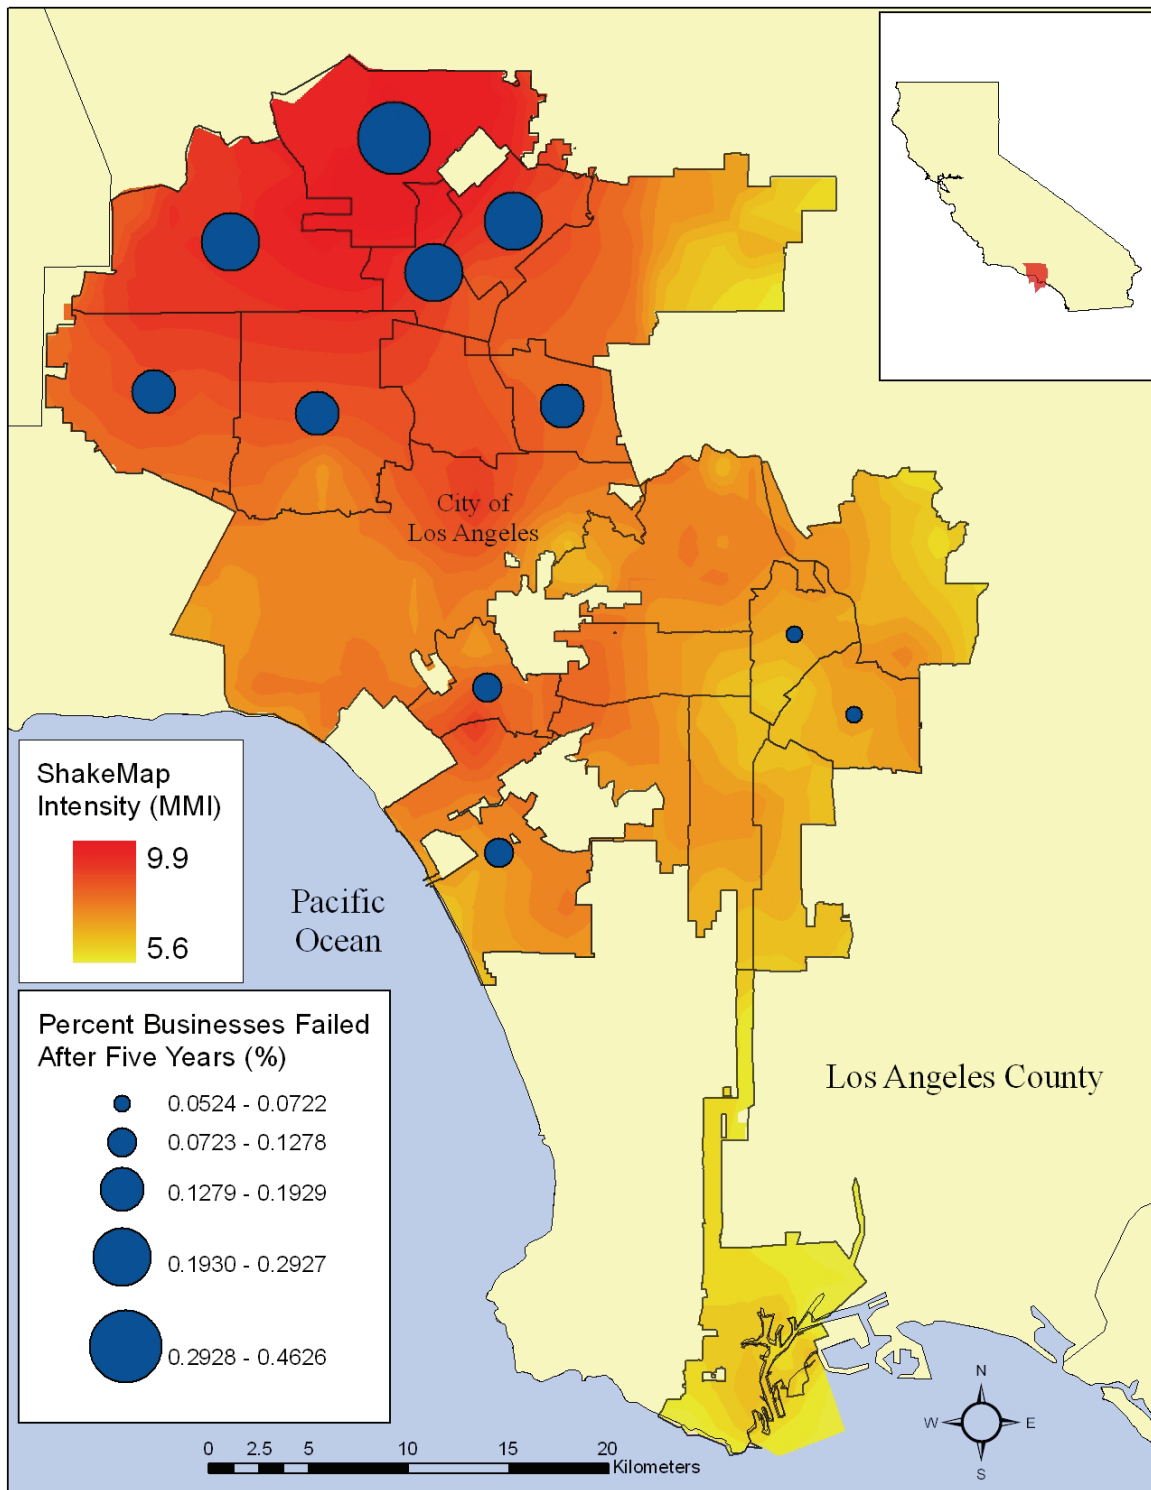


Figure 5-22 Map of business failure rates for each Los Angeles PUMA five years after the Northridge earthquake

Table 5-2 Statistics on modeled business failure due to the Northridge earthquake

	Failed	Didn't Fail
% locally-oriented	80%	74%
% with insurance	11%	15%
Mean business size	0.02	0.2
Mean building size	0.08	0.08
Mean MMI	7.8	7.4
Mean mitigation	0.42	0.52
Mean damage	0.36	0.05

SECTION 6 CONCLUSIONS

As described in Sections 2~5, numerous refinements have been made to the recovery model that was previously published in Miles and Chang (2003, 2006). Significant improvements have been made to both the underlying conceptual model and the model's implementation. The refined model has, moreover, been applied and calibrated to the 1994 Northridge earthquake. This section concludes the technical report by discussing potential applications of the model to "what-if" scenarios (Section 6.1); advances, contributions, and limitations of this study and approach (Section 6.2), and prospects and areas for further research (Section 6.3).

6.1 What-if applications: preliminary examples

A primary motivation for developing the model was to allow application to "what-if" scenarios. Because disasters are rare and complex events, empirical studies of disaster recovery have generally adopted case study approaches. Case studies provide a rich, in-depth understanding of particular communities and disaster events. They provide insights on factors and specific variables that appear to influence recovery, as well as a broad understanding of recovery processes – insights that provided the empirical foundations for the current simulation model. A more quantitative, systematic, and comparative approach is needed, however, to develop a generalized knowledge base that could be used to support decision-making. Running the simulation model for various "what-if" scenarios provides an important approach for addressing this need.

6.1.1 Types of "What-if" questions

Generally speaking, the model facilitates explore three types of "what-if" questions: (1) questions related to potential decisions and policies, (2) those related to exogenous factors such as community or hazard-event characteristics, and (3) those concerning changes over time.

Policy variables - The model currently includes several variables that represent decisions, plans, and policies that may influence recovery. These may be plans or policies implemented by the community, such as institution of seismic design codes (specifically, the variable CYR, the year that the seismic code became effective) or whether or not the community has developed an effective disaster preparedness plan (the variable PLAN). They may be policies made by lifeline or critical facilities organizations (e.g., mitigation MIT) or by higher levels of government, such as federal guidelines for disaster assistance (the variable AID). They may even be proxy variables relating to a community's "capacity" for consensus and effective decision-making (the variable CAP). Other decision, planning, and policy variables are shown (by bold font and underline) in Table 2-1.

These variables are simplified representations of actual decisions, plans, and policies. For example, the code year CYR consists of a single designated year. All buildings constructed prior to this year are considered to perform worse (as indicated by the fragility curve) than all buildings constructed after that year. A more realistic representation would be to allow for multiple code years that represent a series of code improvements and seismic design vintages over time. Fragility curves for pre- and post-code could, moreover, differ by construction type (e.g., wood-frame single-family residences v. high-rise concrete frame buildings). The structure

of the model does allow for these types of refinements. But it is important to consider that these types of refinements would require not only changes in model algorithms, but associated levels of detail in input data, such as data on construction type and year. These detailed input data may not be available for many communities. In the case of the Northridge application, for Los Angeles, we were unable to obtain detailed data on nonresidential building stock.

Similarly, it should be noted that the policy variables in the model represent only a small subset of policy variables that do influence recovery and that may be of interest to users of the model. The current set of variables is based on policy-related factors that are salient in the empirical literature. Other policy variables could in principle be added to the model.

The policy variables in the model can be used to explore questions related to alternative choices that may enhance a community's ability to recover from future disasters. For example, what policy variables most influence recovery? What are the implications of policy alternative A, versus alternatives B and C? Which alternative would provide the greatest enhancement in ability to recover, and hence resilience? Within the limits of the model, how much of a change in policy variable X would be needed to attain a certain level of resilience? What are the equity implications of a given policy choice – for example, would disparities in resilience across neighborhoods increase or decrease?

Exogenous factors – A second type of question relates to variables that represent exogenous conditions rather than choices. These include inherent characteristics of the community itself that may be social, demographic, economic, geographic, or historical (e.g., income distribution, industry composition and economic structure). Other exogenous conditions refer to the hazard event itself – whether it is spatially extensive or focused (e.g., earthquake vs. terrorist bombing), the magnitude and severity of the event (e.g., ground shaking intensities for an earthquake), and whether it is a single event or a series (e.g., earthquake without or with aftershocks).

Varying these exogenous factors would allow insights into how robust the model outcomes are to different community contexts. For example, is policy alternative A always preferable to alternative B? Are there certain types of communities for which alternative B would be preferable? It would also allow insights into how resilience outcomes differ by severity and type of hazard. Are there certain thresholds of earthquake severity, for example, beyond which recovery will be particularly difficult and time-consuming? Is a given community more resilient to floods or earthquakes? Perhaps most intriguingly, when considering capacity for recovery and resilience, do characteristics of the community matter more than characteristics of the hazard itself? Are there certain types of communities that exhibit consistently low or particularly high levels of resilience?

Changes over time – A third type of "what-if" question concerns how a community's resilience may be changing over time. Projected population growth, future development in floodplains, and a shift toward a service-oriented economy are examples of changes that can be readily represented in the model (by specifying the attributes and populations of households, businesses, and neighborhoods for the community as anticipated for some future time period). How are such factors, which are independent of efforts to reduce risk, affect future risk and resilience? Similarly, what effect would policy decisions today (e.g., adoption of seismic code this year) have on community resilience in the future? "What-if" investigation that replicates actual policy decisions can help to address questions such as whether policy choices are improving resilience, and to what degree.

6.1.2 Examples of "what-if" scenarios

To illustrate how "what-if" scenarios can be applied, this section considers two cases. The first pertains to a policy variable – the year the community adopts the seismic code (variable CYR). Specifically, what if the seismic code year had been delayed by a decade, so that the effect code year were 1986 rather than 1976? Buildings built between these years would be more prone to earthquake damage than they actually are; would this have a noticeable effect on recovery and resilience? The second "what-if" scenario relates to a community characteristic, income disparity (variable INC for households). Specifically, what if there were no income disparities in Los Angeles? Clearly this case is hypothetical and not intended to represent a potential actual condition. What it does allow, however, is exploration of the question: How much does income disparity, a community characteristic, influence recovery outcomes? This case is implemented as assigning each household an income value of $INC=0.5$ (indicating that all Los Angeles residents have an income equal to about \$62,500 or half of 1990 95th percentile income). Each of these cases is applied to a repeat of the 1994 Northridge earthquake and compared to a baseline, which consists of the model as calibrated to the Northridge event.

As indicated in Section 5 on the post-event model, numerous outputs of the model could be used to compare the various cases. For present purposes, the "what-if" scenarios are compared on the basis of structural restoration curves, as indicated in Figure 6-1 (a~c). Of all the outputs of the post-event model, restoration had the most complete and reliable empirical data for calibration. The restoration curves in Figure 6-1 are similar in form to Figures 5-1 through 5-6 and indicate the percentage of damaged residential structures rebuilt over time for all, single-family, and multi-family structures, respectively. The numbered circles in Figure 6-1 (a~c) are identical and represent the empirical calibration points from reported data, as described in Section 5. They serve as useful benchmarks for comparing the three graphs in the figure.

Comparing graphs (a) and (b) in Figure 6-1, it can be seen that the effect of delaying the code year (b) is fairly minor in terms of reconstruction. The only notable difference is that after approximately two years, reconstruction activities level off at around 65%, in comparison with the baseline case where it levels off at around 85%. This difference can be attributed to the much lower reconstruction rate for multi-family residences. Because the "what-if" scenario affects only a 10-year vintage of buildings, the similarity between the two is not surprising. Further investigation could consider whether the multi-family residences are highly represented in this 10-year vintage.

Comparing graphs (a) and (c) in Figure 6-1 reveals somewhat greater differences. In particular, after the first year, reconstruction with respect to time in the case with completely even income distribution (c) is consistently greater by about 5~10 percentage points than in the baseline (a). Reconstruction of all residences levels off at about 88% rather than 81%. Perhaps the most dramatic difference is that the complete single-family residence stock is rebuilt about 60 weeks faster in case (c). The rate of reconstruction for multi-family residences appears to be about the same in the first year, but increase in rate for case (c) during the second year. The difference in the percentage of residences rebuilt between single-family and multi-family residences is about 10% less in the case (c) than the baseline case. This illustrates that household income is, in fact, important for multi-family residence restoration, but far from sufficient. Further exploration could pursue the question of whether the effect arises more from changing incomes or from eliminating disparities, for example by comparing different neighborhoods.

6.2 Advances, contributions, and limitations

The earlier model on disaster recovery (Miles and Chang, 2003; 2006) represented, to our knowledge, the first attempt by researchers to develop a comprehensive computer-based model of urban disaster recovery. It provided an early prototype model that demonstrated the feasibility of the concept and broadly validated it for an application to the catastrophic 1995 Kobe earthquake. A series of internal and external evaluation exercises were conducted on this model. The latter included formal practitioner feedback (through focus group and survey), formal assessment from a computer programming professional, and informal peer feedback from conference presentations and seminars. Priorities for model refinements were developed from these evaluation exercises and implemented as described in this technical report.

The refined model, which can be considered a second-generation prototype, makes several important advances and contributions. First, it provides a more meaningful characterization of recovery indicators (e.g., percent of buildings rebuilt) that can be compared with data from actual disasters. Second, it is fully modular in design, with linked but separate co-event and post-event modules. The former simulates input data and impacts at the time of the disaster, and is somewhat akin to the more traditional models that estimate disaster losses in terms of human casualties and property damage ("loss estimation models"). The post-event module simulates multi-dimensional recovery over the weeks and months following the disaster. Separating the co-event and post-event modules allows for substitution of actual data or alternative simulation modules – for example, in the Northridge application, actual rather than simulated data on lifeline restoration were used. Third, the model is scalable, allowing representation of any number of neighborhoods and agents within these neighborhoods. This facilitates the incorporation of actual data on households and businesses. It also allows, in principle, for the internal migration of households and businesses within the study area, although this refinement has yet to be implemented. Finally, the model has been applied to the case of the 1994 Northridge earthquake – an event that is not only the best-documented earthquake (in English) but also one striking a major U.S. metropolitan area and, until Hurricane Katrina, the U.S.'s costliest disaster. The model has, in other words, been successfully applied to a major U.S. urban center and calibrated against the best available data for any earthquake disaster.

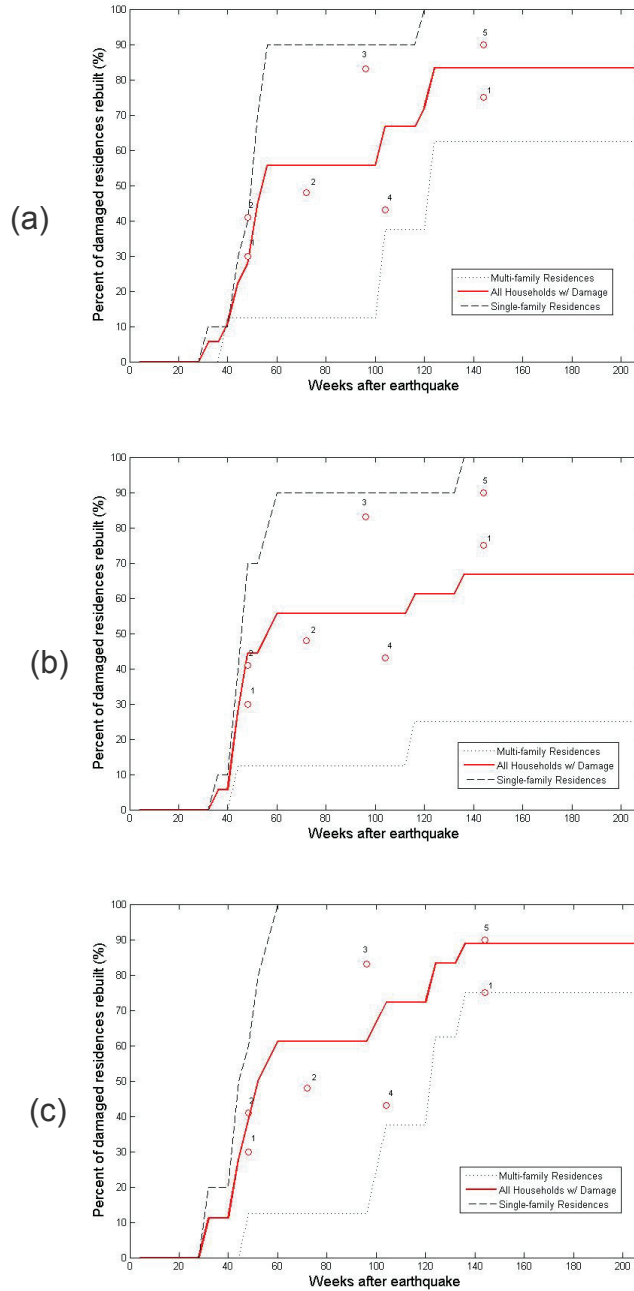


Figure 6-1. Reconstruction curves for "what-if" scenarios. (a) Baseline case, (b) Code year delayed, (c) No income disparity.

In the course of this study, several limitations became apparent, some relating to the model as currently implemented and others relating to the general approach regarding recovery simulation. Limitations of the current model include a representation of decisions and decision-making that is probably overly simplistic and limited. It is worth considering, however, the degree to which more complex representations are warranted in balance with the level of simplification in other parts of the model (see further discussion in Section 6.3 below). The lack of a capability for modeling relocation of households within the study region remains another key limitation. It should be noted, nevertheless, that very little empirical data are available on relocation in actual disasters, so that even if such a capability were to be developed, it may be impossible to calibrate.

A second general limitation derives from the model having been calibrated on a single event, the Northridge earthquake, which was a moderate-sized disaster. The performance of the model in the context of smaller, less destructive events and larger, catastrophic events is unknown. The earlier model was evaluated against the devastating Kobe earthquake, but the current model incorporates numerous substantial refinements and the exercise should be repeated. The overall reliability and performance of the model across a range of disasters is at present unknown.

Finally, a key limitation concerns the overall unevenness in reliability and performance of the model in comparison with available data for Northridge. The model performs well in simulating damage, for example, but rather poorly in simulating injuries. Some input variables in the model (e.g., household demographics) are based on reliable and complete data, while others (e.g., mitigation status of buildings) are based on rough algorithms for generating synthetic data in the absence of any real information. Some elements and outputs of the model (e.g., health recovery, debt) simply could not be verified empirically, much less calibrated, because of lack of empirical data.

6.3 Prospects and areas for further research

Models of urban disaster recovery, such as the one described in this technical report, have several potential uses, including decision support and education. They may be used by emergency managers, planners, decision-makers, and policy-makers to explore alternative approaches for reducing risk and enhancing community resilience through pre-disaster mitigations. They may also be used as one source of information to support planning for post-disaster recovery. Numerous simplifications were, however, required to render the model conceptually and computationally tractable. In this regard, this model could perhaps be more appropriately and effectively applied for educational and awareness rather than for decision-support purposes.

The comprehensive nature of the model, which is one of its key strengths, suggests that it may be especially appropriate for educational and awareness purposes. Many professionals – including emergency managers but extending also to elected officials, urban planners, and the like – make decisions that intentionally or unintentionally influence community recovery and resilience. Yet many are unfamiliar with the research literature on factors that influence recovery. In an interactive setting, where users can pose "what-if" scenarios and explore their consequences, the recovery model could be used to help educate users about empirical findings from disaster studies (e.g., what types of businesses tend to have the most difficulty recovering), to raise awareness about the interconnections between different sectors in recovery, to help visualize and

develop an understanding of what to expect in the event of a future disaster, and to identify alternative approaches to enhancing recovery and resilience.

From a research standpoint, one particularly valuable prospect for the recovery model is to help develop systematic frameworks and knowledge bases regarding disaster recovery. It has already been mentioned that the model generates numerous outcomes that cannot be empirically verified at present; viewed positively, this means that the model can be used to generate hypotheses for testing in carefully designed empirical studies. For example, Table 5-1 summarized contrasted characteristics of households that left the region in the model from those that stayed (e.g., those leaving tended to have lower incomes, and lower likelihoods of being insured or living in a single-family residence). Besides pointing out the need for studies that inquire into household dislocation, this provides some starting hypotheses for such investigations. Similarly, the model generates results spatially, indicating contrasts in recovery factors and progress across neighborhoods. While many of these could not be empirically verified, they do point out the need for more spatially sensitive studies of recovery and generate hypotheses about spatial inequalities that can be pursued in other studies.

Generally speaking, the findings from this report indicate a strong need for more systematic empirical data on pre-disaster urban conditions as well as disaster recovery. It is surprising that even for one of the most highly studied earthquake-prone regions in the world, and arguably the best-documented earthquake disaster (at least in the U.S.), basic data – on such factors as prevalence of pre-disaster mitigations, insurance patterns, construction years of non-residential buildings, reconstruction timeframes for the non-residential building stock, household consumption and health recovery, and economic recovery for various neighborhoods – are unavailable or non-existent. The complexity and internal sophistication of a model must be balanced with what available data will support. While numerous advances could potentially be made in terms of model design, the need for better empirical data is probably more urgent.

In terms of model improvements, several priorities for further research can be identified. Additional variables should be included in the model to represent a wider range of resources available to agent that influence resilience and recovery. Additional agents should be included representing various levels and organizations of the governmental and non-governmental sectors. Additional types of decisions, plans, and policies, as well as more detailed representations of them (e.g., specificity with regard to type and extent of lifeline mitigations) should be incorporated. Attention should be paid to modeling systems aspects of lifeline service, damage, and restoration.

More refined treatment of agents' behaviors should be developed, particularly within the capabilities allowed by agent-based modeling. For instance, household and business agents currently have fairly static interactions with their environments and are spatially fixed in location. More refined treatment could include an explicit representation of agents' access to resources and decision-making, for example, in response to environmental conditions or behaviors of agents in their vicinity (e.g., exchange of information), in terms of migration and relocation, and on the basis of microeconomic theories of behavior and decision-making.

The conceptual framework, too, could be refined from a theoretical standpoint. One possibility would be to emphasize dynamics and ongoing forces for change, considering for example not only the current population of a neighborhood, but also how this population had been changing in the decades preceding the disaster. Another possibility would be to rebuild the model around a

more theoretically sophisticated and consistent core, such as a regional economic model (e.g., a computable general equilibrium model). Clearly, such refinements would entail substantially greater data demands than what is currently required. New, alternative models of disaster recovery would provide valuable opportunities for comparative assessment.

Finally, further research should seek to apply the current model in numerous other situations – to other urban areas, types of disasters, and disaster events. The model has multi-hazard capabilities in principle. Applications to floods, hurricanes, or terrorist events could be helpful for refining the model and for developing generalized insights into resilience factors across hazards.

Applications to other urban areas could begin to develop robust insights into what types of urban areas or urban conditions are most resilient (or conversely, most lacking in resilience) and ultimately, what types of policy interventions may be most effective in enhancing resilience.

SECTION 7 REFERENCES

- Alesch, D.J.; Holly, J.N.; Mittler, E. and Nagy, R., (2004), "Organizations at Risk: What Happens When Small Businesses and Not-for-profits Encounter Natural Disasters," Public Entity Risk Institute, Fairfax, Virginia. USA.
- Bruneau, M., Chang, S.E.; Eguchi, R.T.; Lee, G.C.; O'Rourke, T.D.; Reinhorn, A.M.; Shinozuka, M.; Tierney, K.; Wallace, W.A. and von Winterfeldt, D., (2003), "A framework to quantitatively assess and enhance the seismic resilience of communities," *Earthquake Spectra* 19(4): 733-752.
- Chang, S.E. (2000) "Transportation performance, disaster vulnerability, and long-term effects of earthquakes," In: *EuroConference on Global Change and Catastrophe Risk Management: Earthquake Risks in Europe*. IIASA, Laxenburg, Austria.
- Chang, S.E., and Miles, S.B., (2004), "The dynamics of recovery: A framework." In Y. Okuyama and S.E. Chang (eds.): *Modeling the Spatial Economic Impact of Disasters*. Springer-Verlag.
- Chang, S.E. and N. Nojima (2001) "Measuring post-disaster transportation system performance: the 1995 Kobe earthquake in comparative perspective," *Transportation Research Part A-Policy and Practice* 35(6): 475-94.
- Chu, H. (1995) "For most quake victims, life is back to normal.," In: *LA Times*, Los Angeles, California, July 16.
- Comerio, M.C. (1997) "Housing issues after disasters," *Journal of Contingencies and Crisis Management* 5(3): 166-78.
- Comerio, M.C. (1998) "Disaster Hits Home," University of California Press, Berkeley, California.
- Comfort, L.K., (1994), "Risk and resilience: Interorganizational learning following the Northridge earthquake of January 17, 1994," *Journal of Contingencies and Crisis Management*, 2(3), pp. 174-188.
- Davidson, R.A. and Z. Çagnan (2005) "Restoration modeling of lifeline systems," In *Research Progress and Accomplishments 2003-2005*. Multidisciplinary Center for Earthquake Engineering Research, Buffalo, NY.
- EQE International, (1995), "The Northridge Earthquake One Year Later: January 17, 1995," Federal Emergency Management Agency Report.

- Federal Emergency Management Agency (FEMA), (2004), "Design and Performance Issues Relating to Healthcare Facilities." In *Primer for Design Professionals*, FEMA Publication 389, 190 pp., https://www.fema.gov/pdf/plan/prevent/rms/389/fema389_ch9.pdf
- Gordon, P., H. W. Richardson, et al. (1995) "The business interruption effects of the Northridge earthquake," Final report to the National Science Foundation. Lusk Center Research Institute, School of Urban and Regional Planning, University of Southern California, Los Angeles, California.
- Johnson, L., (2000), "Kobe and Northridge reconstruction: A look at outcomes of varying public and private housing reconstruction financing models," *EuroConference on Global Change and Catastrophe Risk Management Earthquake Risks in Europe*, IIASA, Laxenburg, Austria, July 6-9 2000.
- Loukaitou-Sideris, A. and Kamel, N., (2004), "Residential Recovery from the Northridge Earthquake: An Evaluation of Federal Assistance Programs," California Policy Research Center, Berkeley, CA.
- McCarty, M.; Perl, L. and Foote, B., (2005), "The Role of HUD Housing Programs in Response to Disasters," Congressional Research Service Report for Congress.
- Miles, S.B., and S.E. Chang, (2006), "Modeling Community Recovery from Earthquakes," *Earthquake Spectra* 22 (2): 439–458.
- Miles, S.B., and S.E. Chang, (2003), "Urban Disaster Recovery: A Framework and Simulation Model," MCEER Technical Report 03-0005, Multidisciplinary Center for Earthquake Engineering Research.
- Office of Statewide Health Planning and Development (OSHDP), (2005), "California's Hospital Seismic Safety Law Its History, Implementation and Related Issues," September 8 2005, pp.19, <http://oshpd.ca.gov/fdd/sb1953/californiasseismicsafetylawetc.pdf>
- Peek-Asa, C.; Kraus, J.F.; Bourque, L.B.; Vimalachandra, D.; Yu, J. and Abrams, J., (1998), "Fatal and hospitalized injuries resulting from the 1994 Northridge earthquake," *International Journal of Epidemiology* 27: 459-465.
- Petak, W.J. and Elahi, S., (2001), "The Northridge earthquake, USA and its economic and social impacts", *EuroConference on Global Change and Catastrophe Risk, Management of Earthquake Risks in Europe*, IIASA, Laxenburg Austria, July 6-9 2000.
- Romero, P. J. and J. L. Adams (1995) "The economic impact of the Northridge earthquake," In: *The Northridge, California, earthquake of 17 January 1994*. M. C. Woods and W. R. Seiple. California Department of Conservation, Division of Mines and Geology, Special Publication 116, Sacramento, California: 263-71.

- Seismic Safety Commission (SSC), (1995), "Northridge Earthquake, turning loss to gain: report to Governor Pete Wilson in response to governor's executive order W-78-94," SSC Rpt. No. 95-1, Seismic Safety Commission, State of California, Sacramento.
- Seligson, H.A., K.I. Shoaf, C. Peek-Asa, and M. Mahue-Giangreco, (2002), "Engineering-based earthquake casualty modeling: Past, present and future," *Proc. 7th National Conference on Earthquake Engineering, 21-25 July 2002, Boston, MA*, Earthquake Engineering Research Institute, Oakland, CA
- Tierney K. J., (1995), "Impacts of Recent U.S. Disasters on Businesses: The 1993 Midwest Floods and the 1994 Northridge Earthquake," Report of the Disaster Research Center, University of Delaware.
- Wu, J.Y. and Lindell, M.K., (2003), "Housing reconstruction after two major earthquakes: The 1994 Northridge earthquake in the United States and the 1999 Chi-Chi earthquake in Taiwan," *Disasters* 28(1): 63-81.

MCEER Technical Reports

MCEER publishes technical reports on a variety of subjects written by authors funded through MCEER. These reports are available from both MCEER Publications and the National Technical Information Service (NTIS). Requests for reports should be directed to MCEER Publications, MCEER, University at Buffalo, State University of New York, Red Jacket Quadrangle, Buffalo, New York 14261. Reports can also be requested through NTIS, 5285 Port Royal Road, Springfield, Virginia 22161. NTIS accession numbers are shown in parenthesis, if available.

- NCEER-87-0001 "First-Year Program in Research, Education and Technology Transfer," 3/5/87, (PB88-134275, A04, MF-A01).
- NCEER-87-0002 "Experimental Evaluation of Instantaneous Optimal Algorithms for Structural Control," by R.C. Lin, T.T. Soong and A.M. Reinhorn, 4/20/87, (PB88-134341, A04, MF-A01).
- NCEER-87-0003 "Experimentation Using the Earthquake Simulation Facilities at University at Buffalo," by A.M. Reinhorn and R.L. Ketter, to be published.
- NCEER-87-0004 "The System Characteristics and Performance of a Shaking Table," by J.S. Hwang, K.C. Chang and G.C. Lee, 6/1/87, (PB88-134259, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0005 "A Finite Element Formulation for Nonlinear Viscoplastic Material Using a Q Model," by O. Gyebe and G. Dasgupta, 11/2/87, (PB88-213764, A08, MF-A01).
- NCEER-87-0006 "Symbolic Manipulation Program (SMP) - Algebraic Codes for Two and Three Dimensional Finite Element Formulations," by X. Lee and G. Dasgupta, 11/9/87, (PB88-218522, A05, MF-A01).
- NCEER-87-0007 "Instantaneous Optimal Control Laws for Tall Buildings Under Seismic Excitations," by J.N. Yang, A. Akbarpour and P. Ghaemmaghami, 6/10/87, (PB88-134333, A06, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0008 "IDARC: Inelastic Damage Analysis of Reinforced Concrete Frame - Shear-Wall Structures," by Y.J. Park, A.M. Reinhorn and S.K. Kunnath, 7/20/87, (PB88-134325, A09, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0009 "Liquefaction Potential for New York State: A Preliminary Report on Sites in Manhattan and Buffalo," by M. Budhu, V. Vijayakumar, R.F. Giese and L. Baumgras, 8/31/87, (PB88-163704, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0010 "Vertical and Torsional Vibration of Foundations in Inhomogeneous Media," by A.S. Veletsos and K.W. Dotson, 6/1/87, (PB88-134291, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0011 "Seismic Probabilistic Risk Assessment and Seismic Margins Studies for Nuclear Power Plants," by Howard H.M. Hwang, 6/15/87, (PB88-134267, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0012 "Parametric Studies of Frequency Response of Secondary Systems Under Ground-Acceleration Excitations," by Y. Yong and Y.K. Lin, 6/10/87, (PB88-134309, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0013 "Frequency Response of Secondary Systems Under Seismic Excitation," by J.A. HoLung, J. Cai and Y.K. Lin, 7/31/87, (PB88-134317, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0014 "Modelling Earthquake Ground Motions in Seismically Active Regions Using Parametric Time Series Methods," by G.W. Ellis and A.S. Cakmak, 8/25/87, (PB88-134283, A08, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0015 "Detection and Assessment of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 8/25/87, (PB88-163712, A05, MF-A01). This report is only available through NTIS (see address given above).

- NCEER-87-0016 "Pipeline Experiment at Parkfield, California," by J. Isenberg and E. Richardson, 9/15/87, (PB88-163720, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0017 "Digital Simulation of Seismic Ground Motion," by M. Shinozuka, G. Deodatis and T. Harada, 8/31/87, (PB88-155197, A04, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0018 "Practical Considerations for Structural Control: System Uncertainty, System Time Delay and Truncation of Small Control Forces," J.N. Yang and A. Akbarpour, 8/10/87, (PB88-163738, A08, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0019 "Modal Analysis of Nonclassically Damped Structural Systems Using Canonical Transformation," by J.N. Yang, S. Sarkani and F.X. Long, 9/27/87, (PB88-187851, A04, MF-A01).
- NCEER-87-0020 "A Nonstationary Solution in Random Vibration Theory," by J.R. Red-Horse and P.D. Spanos, 11/3/87, (PB88-163746, A03, MF-A01).
- NCEER-87-0021 "Horizontal Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by A.S. Veletsos and K.W. Dotson, 10/15/87, (PB88-150859, A04, MF-A01).
- NCEER-87-0022 "Seismic Damage Assessment of Reinforced Concrete Members," by Y.S. Chung, C. Meyer and M. Shinozuka, 10/9/87, (PB88-150867, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0023 "Active Structural Control in Civil Engineering," by T.T. Soong, 11/11/87, (PB88-187778, A03, MF-A01).
- NCEER-87-0024 "Vertical and Torsional Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by K.W. Dotson and A.S. Veletsos, 12/87, (PB88-187786, A03, MF-A01).
- NCEER-87-0025 "Proceedings from the Symposium on Seismic Hazards, Ground Motions, Soil-Liquefaction and Engineering Practice in Eastern North America," October 20-22, 1987, edited by K.H. Jacob, 12/87, (PB88-188115, A23, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0026 "Report on the Whittier-Narrows, California, Earthquake of October 1, 1987," by J. Pantelic and A. Reinhorn, 11/87, (PB88-187752, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0027 "Design of a Modular Program for Transient Nonlinear Analysis of Large 3-D Building Structures," by S. Srivastav and J.F. Abel, 12/30/87, (PB88-187950, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0028 "Second-Year Program in Research, Education and Technology Transfer," 3/8/88, (PB88-219480, A04, MF-A01).
- NCEER-88-0001 "Workshop on Seismic Computer Analysis and Design of Buildings With Interactive Graphics," by W. McGuire, J.F. Abel and C.H. Conley, 1/18/88, (PB88-187760, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0002 "Optimal Control of Nonlinear Flexible Structures," by J.N. Yang, F.X. Long and D. Wong, 1/22/88, (PB88-213772, A06, MF-A01).
- NCEER-88-0003 "Substructuring Techniques in the Time Domain for Primary-Secondary Structural Systems," by G.D. Manolis and G. Juhn, 2/10/88, (PB88-213780, A04, MF-A01).
- NCEER-88-0004 "Iterative Seismic Analysis of Primary-Secondary Systems," by A. Singhal, L.D. Lutes and P.D. Spanos, 2/23/88, (PB88-213798, A04, MF-A01).
- NCEER-88-0005 "Stochastic Finite Element Expansion for Random Media," by P.D. Spanos and R. Ghanem, 3/14/88, (PB88-213806, A03, MF-A01).

- NCEER-88-0006 "Combining Structural Optimization and Structural Control," by F.Y. Cheng and C.P. Pantelides, 1/10/88, (PB88-213814, A05, MF-A01).
- NCEER-88-0007 "Seismic Performance Assessment of Code-Designed Structures," by H.H-M. Hwang, J-W. Jaw and H-J. Shau, 3/20/88, (PB88-219423, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0008 "Reliability Analysis of Code-Designed Structures Under Natural Hazards," by H.H-M. Hwang, H. Ushiba and M. Shinozuka, 2/29/88, (PB88-229471, A07, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0009 "Seismic Fragility Analysis of Shear Wall Structures," by J-W Jaw and H.H-M. Hwang, 4/30/88, (PB89-102867, A04, MF-A01).
- NCEER-88-0010 "Base Isolation of a Multi-Story Building Under a Harmonic Ground Motion - A Comparison of Performances of Various Systems," by F-G Fan, G. Ahmadi and I.G. Tadjbakhsh, 5/18/88, (PB89-122238, A06, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0011 "Seismic Floor Response Spectra for a Combined System by Green's Functions," by F.M. Lavelle, L.A. Bergman and P.D. Spanos, 5/1/88, (PB89-102875, A03, MF-A01).
- NCEER-88-0012 "A New Solution Technique for Randomly Excited Hysteretic Structures," by G.Q. Cai and Y.K. Lin, 5/16/88, (PB89-102883, A03, MF-A01).
- NCEER-88-0013 "A Study of Radiation Damping and Soil-Structure Interaction Effects in the Centrifuge," by K. Weissman, supervised by J.H. Prevost, 5/24/88, (PB89-144703, A06, MF-A01).
- NCEER-88-0014 "Parameter Identification and Implementation of a Kinematic Plasticity Model for Frictional Soils," by J.H. Prevost and D.V. Griffiths, to be published.
- NCEER-88-0015 "Two- and Three- Dimensional Dynamic Finite Element Analyses of the Long Valley Dam," by D.V. Griffiths and J.H. Prevost, 6/17/88, (PB89-144711, A04, MF-A01).
- NCEER-88-0016 "Damage Assessment of Reinforced Concrete Structures in Eastern United States," by A.M. Reinhorn, M.J. Seidel, S.K. Kunnath and Y.J. Park, 6/15/88, (PB89-122220, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0017 "Dynamic Compliance of Vertically Loaded Strip Foundations in Multilayered Viscoelastic Soils," by S. Ahmad and A.S.M. Israil, 6/17/88, (PB89-102891, A04, MF-A01).
- NCEER-88-0018 "An Experimental Study of Seismic Structural Response With Added Viscoelastic Dampers," by R.C. Lin, Z. Liang, T.T. Soong and R.H. Zhang, 6/30/88, (PB89-122212, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0019 "Experimental Investigation of Primary - Secondary System Interaction," by G.D. Manolis, G. Juhn and A.M. Reinhorn, 5/27/88, (PB89-122204, A04, MF-A01).
- NCEER-88-0020 "A Response Spectrum Approach For Analysis of Nonclassically Damped Structures," by J.N. Yang, S. Sarkani and F.X. Long, 4/22/88, (PB89-102909, A04, MF-A01).
- NCEER-88-0021 "Seismic Interaction of Structures and Soils: Stochastic Approach," by A.S. Veletsos and A.M. Prasad, 7/21/88, (PB89-122196, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0022 "Identification of the Serviceability Limit State and Detection of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 6/15/88, (PB89-122188, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0023 "Multi-Hazard Risk Analysis: Case of a Simple Offshore Structure," by B.K. Bhartia and E.H. Vanmarcke, 7/21/88, (PB89-145213, A05, MF-A01).

- NCEER-88-0024 "Automated Seismic Design of Reinforced Concrete Buildings," by Y.S. Chung, C. Meyer and M. Shinozuka, 7/5/88, (PB89-122170, A06, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0025 "Experimental Study of Active Control of MDOF Structures Under Seismic Excitations," by L.L. Chung, R.C. Lin, T.T. Soong and A.M. Reinhorn, 7/10/88, (PB89-122600, A04, MF-A01).
- NCEER-88-0026 "Earthquake Simulation Tests of a Low-Rise Metal Structure," by J.S. Hwang, K.C. Chang, G.C. Lee and R.L. Ketter, 8/1/88, (PB89-102917, A04, MF-A01).
- NCEER-88-0027 "Systems Study of Urban Response and Reconstruction Due to Catastrophic Earthquakes," by F. Kozin and H.K. Zhou, 9/22/88, (PB90-162348, A04, MF-A01).
- NCEER-88-0028 "Seismic Fragility Analysis of Plane Frame Structures," by H.H-M. Hwang and Y.K. Low, 7/31/88, (PB89-131445, A06, MF-A01).
- NCEER-88-0029 "Response Analysis of Stochastic Structures," by A. Kardara, C. Bucher and M. Shinozuka, 9/22/88, (PB89-174429, A04, MF-A01).
- NCEER-88-0030 "Nonnormal Accelerations Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 9/19/88, (PB89-131437, A04, MF-A01).
- NCEER-88-0031 "Design Approaches for Soil-Structure Interaction," by A.S. Veletsos, A.M. Prasad and Y. Tang, 12/30/88, (PB89-174437, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0032 "A Re-evaluation of Design Spectra for Seismic Damage Control," by C.J. Turkstra and A.G. Tallin, 11/7/88, (PB89-145221, A05, MF-A01).
- NCEER-88-0033 "The Behavior and Design of Noncontact Lap Splices Subjected to Repeated Inelastic Tensile Loading," by V.E. Sagan, P. Gergely and R.N. White, 12/8/88, (PB89-163737, A08, MF-A01).
- NCEER-88-0034 "Seismic Response of Pile Foundations," by S.M. Mamoon, P.K. Banerjee and S. Ahmad, 11/1/88, (PB89-145239, A04, MF-A01).
- NCEER-88-0035 "Modeling of R/C Building Structures With Flexible Floor Diaphragms (IDARC2)," by A.M. Reinhorn, S.K. Kunnath and N. Panahshahi, 9/7/88, (PB89-207153, A07, MF-A01).
- NCEER-88-0036 "Solution of the Dam-Reservoir Interaction Problem Using a Combination of FEM, BEM with Particular Integrals, Modal Analysis, and Substructuring," by C-S. Tsai, G.C. Lee and R.L. Ketter, 12/31/88, (PB89-207146, A04, MF-A01).
- NCEER-88-0037 "Optimal Placement of Actuators for Structural Control," by F.Y. Cheng and C.P. Pantelides, 8/15/88, (PB89-162846, A05, MF-A01).
- NCEER-88-0038 "Teflon Bearings in Aseismic Base Isolation: Experimental Studies and Mathematical Modeling," by A. Mokha, M.C. Constantinou and A.M. Reinhorn, 12/5/88, (PB89-218457, A10, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0039 "Seismic Behavior of Flat Slab High-Rise Buildings in the New York City Area," by P. Weidlinger and M. Ettouney, 10/15/88, (PB90-145681, A04, MF-A01).
- NCEER-88-0040 "Evaluation of the Earthquake Resistance of Existing Buildings in New York City," by P. Weidlinger and M. Ettouney, 10/15/88, to be published.
- NCEER-88-0041 "Small-Scale Modeling Techniques for Reinforced Concrete Structures Subjected to Seismic Loads," by W. Kim, A. El-Attar and R.N. White, 11/22/88, (PB89-189625, A05, MF-A01).
- NCEER-88-0042 "Modeling Strong Ground Motion from Multiple Event Earthquakes," by G.W. Ellis and A.S. Cakmak, 10/15/88, (PB89-174445, A03, MF-A01).

- NCEER-88-0043 "Nonstationary Models of Seismic Ground Acceleration," by M. Grigoriu, S.E. Ruiz and E. Rosenblueth, 7/15/88, (PB89-189617, A04, MF-A01).
- NCEER-88-0044 "SARCF User's Guide: Seismic Analysis of Reinforced Concrete Frames," by Y.S. Chung, C. Meyer and M. Shinozuka, 11/9/88, (PB89-174452, A08, MF-A01).
- NCEER-88-0045 "First Expert Panel Meeting on Disaster Research and Planning," edited by J. Pantelic and J. Stoyke, 9/15/88, (PB89-174460, A05, MF-A01).
- NCEER-88-0046 "Preliminary Studies of the Effect of Degrading Infill Walls on the Nonlinear Seismic Response of Steel Frames," by C.Z. Chrysostomou, P. Gergely and J.F. Abel, 12/19/88, (PB89-208383, A05, MF-A01).
- NCEER-88-0047 "Reinforced Concrete Frame Component Testing Facility - Design, Construction, Instrumentation and Operation," by S.P. Pessiki, C. Conley, T. Bond, P. Gergely and R.N. White, 12/16/88, (PB89-174478, A04, MF-A01).
- NCEER-89-0001 "Effects of Protective Cushion and Soil Compliancy on the Response of Equipment Within a Seismically Excited Building," by J.A. HoLung, 2/16/89, (PB89-207179, A04, MF-A01).
- NCEER-89-0002 "Statistical Evaluation of Response Modification Factors for Reinforced Concrete Structures," by H.H-M. Hwang and J-W. Jaw, 2/17/89, (PB89-207187, A05, MF-A01).
- NCEER-89-0003 "Hysteretic Columns Under Random Excitation," by G-Q. Cai and Y.K. Lin, 1/9/89, (PB89-196513, A03, MF-A01).
- NCEER-89-0004 "Experimental Study of 'Elephant Foot Bulge' Instability of Thin-Walled Metal Tanks," by Z-H. Jia and R.L. Ketter, 2/22/89, (PB89-207195, A03, MF-A01).
- NCEER-89-0005 "Experiment on Performance of Buried Pipelines Across San Andreas Fault," by J. Isenberg, E. Richardson and T.D. O'Rourke, 3/10/89, (PB89-218440, A04, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0006 "A Knowledge-Based Approach to Structural Design of Earthquake-Resistant Buildings," by M. Subramani, P. Gergely, C.H. Conley, J.F. Abel and A.H. Zaghaw, 1/15/89, (PB89-218465, A06, MF-A01).
- NCEER-89-0007 "Liquefaction Hazards and Their Effects on Buried Pipelines," by T.D. O'Rourke and P.A. Lane, 2/1/89, (PB89-218481, A09, MF-A01).
- NCEER-89-0008 "Fundamentals of System Identification in Structural Dynamics," by H. Imai, C-B. Yun, O. Maruyama and M. Shinozuka, 1/26/89, (PB89-207211, A04, MF-A01).
- NCEER-89-0009 "Effects of the 1985 Michoacan Earthquake on Water Systems and Other Buried Lifelines in Mexico," by A.G. Ayala and M.J. O'Rourke, 3/8/89, (PB89-207229, A06, MF-A01).
- NCEER-89-R010 "NCEER Bibliography of Earthquake Education Materials," by K.E.K. Ross, Second Revision, 9/1/89, (PB90-125352, A05, MF-A01). This report is replaced by NCEER-92-0018.
- NCEER-89-0011 "Inelastic Three-Dimensional Response Analysis of Reinforced Concrete Building Structures (IDARC-3D), Part I - Modeling," by S.K. Kunnath and A.M. Reinhorn, 4/17/89, (PB90-114612, A07, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0012 "Recommended Modifications to ATC-14," by C.D. Poland and J.O. Malley, 4/12/89, (PB90-108648, A15, MF-A01).
- NCEER-89-0013 "Repair and Strengthening of Beam-to-Column Connections Subjected to Earthquake Loading," by M. Corazao and A.J. Durrani, 2/28/89, (PB90-109885, A06, MF-A01).
- NCEER-89-0014 "Program EXKAL2 for Identification of Structural Dynamic Systems," by O. Maruyama, C-B. Yun, M. Hoshiya and M. Shinozuka, 5/19/89, (PB90-109877, A09, MF-A01).

- NCEER-89-0015 "Response of Frames With Bolted Semi-Rigid Connections, Part I - Experimental Study and Analytical Predictions," by P.J. DiCorso, A.M. Reinhorn, J.R. Dickerson, J.B. Radzinski and W.L. Harper, 6/1/89, to be published.
- NCEER-89-0016 "ARMA Monte Carlo Simulation in Probabilistic Structural Analysis," by P.D. Spanos and M.P. Mignolet, 7/10/89, (PB90-109893, A03, MF-A01).
- NCEER-89-P017 "Preliminary Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 6/23/89, (PB90-108606, A03, MF-A01).
- NCEER-89-0017 "Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 12/31/89, (PB90-207895, A012, MF-A02). This report is available only through NTIS (see address given above).
- NCEER-89-0018 "Multidimensional Models of Hysteretic Material Behavior for Vibration Analysis of Shape Memory Energy Absorbing Devices, by E.J. Graesser and F.A. Cozzarelli, 6/7/89, (PB90-164146, A04, MF-A01).
- NCEER-89-0019 "Nonlinear Dynamic Analysis of Three-Dimensional Base Isolated Structures (3D-BASIS)," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 8/3/89, (PB90-161936, A06, MF-A01). This report has been replaced by NCEER-93-0011.
- NCEER-89-0020 "Structural Control Considering Time-Rate of Control Forces and Control Rate Constraints," by F.Y. Cheng and C.P. Pantelides, 8/3/89, (PB90-120445, A04, MF-A01).
- NCEER-89-0021 "Subsurface Conditions of Memphis and Shelby County," by K.W. Ng, T-S. Chang and H-H.M. Hwang, 7/26/89, (PB90-120437, A03, MF-A01).
- NCEER-89-0022 "Seismic Wave Propagation Effects on Straight Jointed Buried Pipelines," by K. Elhadi and M.J. O'Rourke, 8/24/89, (PB90-162322, A10, MF-A02).
- NCEER-89-0023 "Workshop on Serviceability Analysis of Water Delivery Systems," edited by M. Grigoriu, 3/6/89, (PB90-127424, A03, MF-A01).
- NCEER-89-0024 "Shaking Table Study of a 1/5 Scale Steel Frame Composed of Tapered Members," by K.C. Chang, J.S. Hwang and G.C. Lee, 9/18/89, (PB90-160169, A04, MF-A01).
- NCEER-89-0025 "DYNA1D: A Computer Program for Nonlinear Seismic Site Response Analysis - Technical Documentation," by Jean H. Prevost, 9/14/89, (PB90-161944, A07, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0026 "1:4 Scale Model Studies of Active Tendon Systems and Active Mass Dampers for Aseismic Protection," by A.M. Reinhorn, T.T. Soong, R.C. Lin, Y.P. Yang, Y. Fukao, H. Abe and M. Nakai, 9/15/89, (PB90-173246, A10, MF-A02). This report is available only through NTIS (see address given above).
- NCEER-89-0027 "Scattering of Waves by Inclusions in a Nonhomogeneous Elastic Half Space Solved by Boundary Element Methods," by P.K. Hadley, A. Askar and A.S. Cakmak, 6/15/89, (PB90-145699, A07, MF-A01).
- NCEER-89-0028 "Statistical Evaluation of Deflection Amplification Factors for Reinforced Concrete Structures," by H.H.M. Hwang, J-W. Jaw and A.L. Ch'ng, 8/31/89, (PB90-164633, A05, MF-A01).
- NCEER-89-0029 "Bedrock Accelerations in Memphis Area Due to Large New Madrid Earthquakes," by H.H.M. Hwang, C.H.S. Chen and G. Yu, 11/7/89, (PB90-162330, A04, MF-A01).
- NCEER-89-0030 "Seismic Behavior and Response Sensitivity of Secondary Structural Systems," by Y.Q. Chen and T.T. Soong, 10/23/89, (PB90-164658, A08, MF-A01).
- NCEER-89-0031 "Random Vibration and Reliability Analysis of Primary-Secondary Structural Systems," by Y. Ibrahim, M. Grigoriu and T.T. Soong, 11/10/89, (PB90-161951, A04, MF-A01).

- NCEER-89-0032 "Proceedings from the Second U.S. - Japan Workshop on Liquefaction, Large Ground Deformation and Their Effects on Lifelines, September 26-29, 1989," Edited by T.D. O'Rourke and M. Hamada, 12/1/89, (PB90-209388, A22, MF-A03).
- NCEER-89-0033 "Deterministic Model for Seismic Damage Evaluation of Reinforced Concrete Structures," by J.M. Bracci, A.M. Reinhorn, J.B. Mander and S.K. Kunnath, 9/27/89, (PB91-108803, A06, MF-A01).
- NCEER-89-0034 "On the Relation Between Local and Global Damage Indices," by E. DiPasquale and A.S. Cakmak, 8/15/89, (PB90-173865, A05, MF-A01).
- NCEER-89-0035 "Cyclic Undrained Behavior of Nonplastic and Low Plasticity Silts," by A.J. Walker and H.E. Stewart, 7/26/89, (PB90-183518, A10, MF-A01).
- NCEER-89-0036 "Liquefaction Potential of Surficial Deposits in the City of Buffalo, New York," by M. Budhu, R. Giese and L. Baumgrass, 1/17/89, (PB90-208455, A04, MF-A01).
- NCEER-89-0037 "A Deterministic Assessment of Effects of Ground Motion Incoherence," by A.S. Veletsos and Y. Tang, 7/15/89, (PB90-164294, A03, MF-A01).
- NCEER-89-0038 "Workshop on Ground Motion Parameters for Seismic Hazard Mapping," July 17-18, 1989, edited by R.V. Whitman, 12/1/89, (PB90-173923, A04, MF-A01).
- NCEER-89-0039 "Seismic Effects on Elevated Transit Lines of the New York City Transit Authority," by C.J. Costantino, C.A. Miller and E. Heymsfield, 12/26/89, (PB90-207887, A06, MF-A01).
- NCEER-89-0040 "Centrifugal Modeling of Dynamic Soil-Structure Interaction," by K. Weissman, Supervised by J.H. Prevost, 5/10/89, (PB90-207879, A07, MF-A01).
- NCEER-89-0041 "Linearized Identification of Buildings With Cores for Seismic Vulnerability Assessment," by I-K. Ho and A.E. Aktan, 11/1/89, (PB90-251943, A07, MF-A01).
- NCEER-90-0001 "Geotechnical and Lifeline Aspects of the October 17, 1989 Loma Prieta Earthquake in San Francisco," by T.D. O'Rourke, H.E. Stewart, F.T. Blackburn and T.S. Dickerman, 1/90, (PB90-208596, A05, MF-A01).
- NCEER-90-0002 "Nonnormal Secondary Response Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 2/28/90, (PB90-251976, A07, MF-A01).
- NCEER-90-0003 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/16/90, (PB91-251984, A05, MF-A05). This report has been replaced by NCEER-92-0018.
- NCEER-90-0004 "Catalog of Strong Motion Stations in Eastern North America," by R.W. Busby, 4/3/90, (PB90-251984, A05, MF-A01).
- NCEER-90-0005 "NCEER Strong-Motion Data Base: A User Manual for the GeoBase Release (Version 1.0 for the Sun3)," by P. Friberg and K. Jacob, 3/31/90 (PB90-258062, A04, MF-A01).
- NCEER-90-0006 "Seismic Hazard Along a Crude Oil Pipeline in the Event of an 1811-1812 Type New Madrid Earthquake," by H.H.M. Hwang and C-H.S. Chen, 4/16/90, (PB90-258054, A04, MF-A01).
- NCEER-90-0007 "Site-Specific Response Spectra for Memphis Sheahan Pumping Station," by H.H.M. Hwang and C.S. Lee, 5/15/90, (PB91-108811, A05, MF-A01).
- NCEER-90-0008 "Pilot Study on Seismic Vulnerability of Crude Oil Transmission Systems," by T. Ariman, R. Dobry, M. Grigoriu, F. Kozin, M. O'Rourke, T. O'Rourke and M. Shinozuka, 5/25/90, (PB91-108837, A06, MF-A01).
- NCEER-90-0009 "A Program to Generate Site Dependent Time Histories: EQGEN," by G.W. Ellis, M. Srinivasan and A.S. Cakmak, 1/30/90, (PB91-108829, A04, MF-A01).
- NCEER-90-0010 "Active Isolation for Seismic Protection of Operating Rooms," by M.E. Talbott, Supervised by M. Shinozuka, 6/8/9, (PB91-110205, A05, MF-A01).

- NCEER-90-0011 "Program LINEARID for Identification of Linear Structural Dynamic Systems," by C-B. Yun and M. Shinozuka, 6/25/90, (PB91-110312, A08, MF-A01).
- NCEER-90-0012 "Two-Dimensional Two-Phase Elasto-Plastic Seismic Response of Earth Dams," by A.N. Yiagos, Supervised by J.H. Prevost, 6/20/90, (PB91-110197, A13, MF-A02).
- NCEER-90-0013 "Secondary Systems in Base-Isolated Structures: Experimental Investigation, Stochastic Response and Stochastic Sensitivity," by G.D. Manolis, G. Juhn, M.C. Constantinou and A.M. Reinhorn, 7/1/90, (PB91-110320, A08, MF-A01).
- NCEER-90-0014 "Seismic Behavior of Lightly-Reinforced Concrete Column and Beam-Column Joint Details," by S.P. Pessiki, C.H. Conley, P. Gergely and R.N. White, 8/22/90, (PB91-108795, A11, MF-A02).
- NCEER-90-0015 "Two Hybrid Control Systems for Building Structures Under Strong Earthquakes," by J.N. Yang and A. Danielians, 6/29/90, (PB91-125393, A04, MF-A01).
- NCEER-90-0016 "Instantaneous Optimal Control with Acceleration and Velocity Feedback," by J.N. Yang and Z. Li, 6/29/90, (PB91-125401, A03, MF-A01).
- NCEER-90-0017 "Reconnaissance Report on the Northern Iran Earthquake of June 21, 1990," by M. Mehrain, 10/4/90, (PB91-125377, A03, MF-A01).
- NCEER-90-0018 "Evaluation of Liquefaction Potential in Memphis and Shelby County," by T.S. Chang, P.S. Tang, C.S. Lee and H. Hwang, 8/10/90, (PB91-125427, A09, MF-A01).
- NCEER-90-0019 "Experimental and Analytical Study of a Combined Sliding Disc Bearing and Helical Steel Spring Isolation System," by M.C. Constantinou, A.S. Mokha and A.M. Reinhorn, 10/4/90, (PB91-125385, A06, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-90-0020 "Experimental Study and Analytical Prediction of Earthquake Response of a Sliding Isolation System with a Spherical Surface," by A.S. Mokha, M.C. Constantinou and A.M. Reinhorn, 10/11/90, (PB91-125419, A05, MF-A01).
- NCEER-90-0021 "Dynamic Interaction Factors for Floating Pile Groups," by G. Gazetas, K. Fan, A. Kaynia and E. Kausel, 9/10/90, (PB91-170381, A05, MF-A01).
- NCEER-90-0022 "Evaluation of Seismic Damage Indices for Reinforced Concrete Structures," by S. Rodriguez-Gomez and A.S. Cakmak, 9/30/90, PB91-171322, A06, MF-A01).
- NCEER-90-0023 "Study of Site Response at a Selected Memphis Site," by H. Desai, S. Ahmad, E.S. Gazetas and M.R. Oh, 10/11/90, (PB91-196857, A03, MF-A01).
- NCEER-90-0024 "A User's Guide to Strongmo: Version 1.0 of NCEER's Strong-Motion Data Access Tool for PCs and Terminals," by P.A. Friberg and C.A.T. Susch, 11/15/90, (PB91-171272, A03, MF-A01).
- NCEER-90-0025 "A Three-Dimensional Analytical Study of Spatial Variability of Seismic Ground Motions," by L-L. Hong and A.H.-S. Ang, 10/30/90, (PB91-170399, A09, MF-A01).
- NCEER-90-0026 "MUMOID User's Guide - A Program for the Identification of Modal Parameters," by S. Rodriguez-Gomez and E. DiPasquale, 9/30/90, (PB91-171298, A04, MF-A01).
- NCEER-90-0027 "SARCF-II User's Guide - Seismic Analysis of Reinforced Concrete Frames," by S. Rodriguez-Gomez, Y.S. Chung and C. Meyer, 9/30/90, (PB91-171280, A05, MF-A01).
- NCEER-90-0028 "Viscous Dampers: Testing, Modeling and Application in Vibration and Seismic Isolation," by N. Makris and M.C. Constantinou, 12/20/90 (PB91-190561, A06, MF-A01).
- NCEER-90-0029 "Soil Effects on Earthquake Ground Motions in the Memphis Area," by H. Hwang, C.S. Lee, K.W. Ng and T.S. Chang, 8/2/90, (PB91-190751, A05, MF-A01).

- NCEER-91-0001 "Proceedings from the Third Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction, December 17-19, 1990," edited by T.D. O'Rourke and M. Hamada, 2/1/91, (PB91-179259, A99, MF-A04).
- NCEER-91-0002 "Physical Space Solutions of Non-Proportionally Damped Systems," by M. Tong, Z. Liang and G.C. Lee, 1/15/91, (PB91-179242, A04, MF-A01).
- NCEER-91-0003 "Seismic Response of Single Piles and Pile Groups," by K. Fan and G. Gazetas, 1/10/91, (PB92-174994, A04, MF-A01).
- NCEER-91-0004 "Damping of Structures: Part 1 - Theory of Complex Damping," by Z. Liang and G. Lee, 10/10/91, (PB92-197235, A12, MF-A03).
- NCEER-91-0005 "3D-BASIS - Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures: Part II," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 2/28/91, (PB91-190553, A07, MF-A01). This report has been replaced by NCEER-93-0011.
- NCEER-91-0006 "A Multidimensional Hysteretic Model for Plasticity Deforming Metals in Energy Absorbing Devices," by E.J. Graesser and F.A. Cozzarelli, 4/9/91, (PB92-108364, A04, MF-A01).
- NCEER-91-0007 "A Framework for Customizable Knowledge-Based Expert Systems with an Application to a KBES for Evaluating the Seismic Resistance of Existing Buildings," by E.G. Ibarra-Anaya and S.J. Fennes, 4/9/91, (PB91-210930, A08, MF-A01).
- NCEER-91-0008 "Nonlinear Analysis of Steel Frames with Semi-Rigid Connections Using the Capacity Spectrum Method," by G.G. Deierlein, S-H. Hsieh, Y-J. Shen and J.F. Abel, 7/2/91, (PB92-113828, A05, MF-A01).
- NCEER-91-0009 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/30/91, (PB91-212142, A06, MF-A01). This report has been replaced by NCEER-92-0018.
- NCEER-91-0010 "Phase Wave Velocities and Displacement Phase Differences in a Harmonically Oscillating Pile," by N. Makris and G. Gazetas, 7/8/91, (PB92-108356, A04, MF-A01).
- NCEER-91-0011 "Dynamic Characteristics of a Full-Size Five-Story Steel Structure and a 2/5 Scale Model," by K.C. Chang, G.C. Yao, G.C. Lee, D.S. Hao and Y.C. Yeh, 7/2/91, (PB93-116648, A06, MF-A02).
- NCEER-91-0012 "Seismic Response of a 2/5 Scale Steel Structure with Added Viscoelastic Dampers," by K.C. Chang, T.T. Soong, S-T. Oh and M.L. Lai, 5/17/91, (PB92-110816, A05, MF-A01).
- NCEER-91-0013 "Earthquake Response of Retaining Walls; Full-Scale Testing and Computational Modeling," by S. Alampalli and A-W.M. Elgamal, 6/20/91, to be published.
- NCEER-91-0014 "3D-BASIS-M: Nonlinear Dynamic Analysis of Multiple Building Base Isolated Structures," by P.C. Tsopelas, S. Nagarajaiah, M.C. Constantinou and A.M. Reinhorn, 5/28/91, (PB92-113885, A09, MF-A02).
- NCEER-91-0015 "Evaluation of SEAOC Design Requirements for Sliding Isolated Structures," by D. Theodossiou and M.C. Constantinou, 6/10/91, (PB92-114602, A11, MF-A03).
- NCEER-91-0016 "Closed-Loop Modal Testing of a 27-Story Reinforced Concrete Flat Plate-Core Building," by H.R. Somaprasad, T. Toksoy, H. Yoshiyuki and A.E. Aktan, 7/15/91, (PB92-129980, A07, MF-A02).
- NCEER-91-0017 "Shake Table Test of a 1/6 Scale Two-Story Lightly Reinforced Concrete Building," by A.G. El-Attar, R.N. White and P. Gergely, 2/28/91, (PB92-222447, A06, MF-A02).
- NCEER-91-0018 "Shake Table Test of a 1/8 Scale Three-Story Lightly Reinforced Concrete Building," by A.G. El-Attar, R.N. White and P. Gergely, 2/28/91, (PB93-116630, A08, MF-A02).
- NCEER-91-0019 "Transfer Functions for Rigid Rectangular Foundations," by A.S. Veletsos, A.M. Prasad and W.H. Wu, 7/31/91, to be published.

- NCEER-91-0020 "Hybrid Control of Seismic-Excited Nonlinear and Inelastic Structural Systems," by J.N. Yang, Z. Li and A. Danielians, 8/1/91, (PB92-143171, A06, MF-A02).
- NCEER-91-0021 "The NCEER-91 Earthquake Catalog: Improved Intensity-Based Magnitudes and Recurrence Relations for U.S. Earthquakes East of New Madrid," by L. Seeber and J.G. Armbruster, 8/28/91, (PB92-176742, A06, MF-A02).
- NCEER-91-0022 "Proceedings from the Implementation of Earthquake Planning and Education in Schools: The Need for Change - The Roles of the Changemakers," by K.E.K. Ross and F. Winslow, 7/23/91, (PB92-129998, A12, MF-A03).
- NCEER-91-0023 "A Study of Reliability-Based Criteria for Seismic Design of Reinforced Concrete Frame Buildings," by H.H.M. Hwang and H-M. Hsu, 8/10/91, (PB92-140235, A09, MF-A02).
- NCEER-91-0024 "Experimental Verification of a Number of Structural System Identification Algorithms," by R.G. Ghanem, H. Gavin and M. Shinozuka, 9/18/91, (PB92-176577, A18, MF-A04).
- NCEER-91-0025 "Probabilistic Evaluation of Liquefaction Potential," by H.H.M. Hwang and C.S. Lee, 11/25/91, (PB92-143429, A05, MF-A01).
- NCEER-91-0026 "Instantaneous Optimal Control for Linear, Nonlinear and Hysteretic Structures - Stable Controllers," by J.N. Yang and Z. Li, 11/15/91, (PB92-163807, A04, MF-A01).
- NCEER-91-0027 "Experimental and Theoretical Study of a Sliding Isolation System for Bridges," by M.C. Constantinou, A. Kartoum, A.M. Reinhorn and P. Bradford, 11/15/91, (PB92-176973, A10, MF-A03).
- NCEER-92-0001 "Case Studies of Liquefaction and Lifeline Performance During Past Earthquakes, Volume 1: Japanese Case Studies," Edited by M. Hamada and T. O'Rourke, 2/17/92, (PB92-197243, A18, MF-A04).
- NCEER-92-0002 "Case Studies of Liquefaction and Lifeline Performance During Past Earthquakes, Volume 2: United States Case Studies," Edited by T. O'Rourke and M. Hamada, 2/17/92, (PB92-197250, A20, MF-A04).
- NCEER-92-0003 "Issues in Earthquake Education," Edited by K. Ross, 2/3/92, (PB92-222389, A07, MF-A02).
- NCEER-92-0004 "Proceedings from the First U.S. - Japan Workshop on Earthquake Protective Systems for Bridges," Edited by I.G. Buckle, 2/4/92, (PB94-142239, A99, MF-A06).
- NCEER-92-0005 "Seismic Ground Motion from a Haskell-Type Source in a Multiple-Layered Half-Space," A.P. Theoharis, G. Deodatis and M. Shinozuka, 1/2/92, to be published.
- NCEER-92-0006 "Proceedings from the Site Effects Workshop," Edited by R. Whitman, 2/29/92, (PB92-197201, A04, MF-A01).
- NCEER-92-0007 "Engineering Evaluation of Permanent Ground Deformations Due to Seismically-Induced Liquefaction," by M.H. Baziari, R. Dobry and A-W.M. Elgamel, 3/24/92, (PB92-222421, A13, MF-A03).
- NCEER-92-0008 "A Procedure for the Seismic Evaluation of Buildings in the Central and Eastern United States," by C.D. Poland and J.O. Malley, 4/2/92, (PB92-222439, A20, MF-A04).
- NCEER-92-0009 "Experimental and Analytical Study of a Hybrid Isolation System Using Friction Controllable Sliding Bearings," by M.Q. Feng, S. Fujii and M. Shinozuka, 5/15/92, (PB93-150282, A06, MF-A02).
- NCEER-92-0010 "Seismic Resistance of Slab-Column Connections in Existing Non-Ductile Flat-Plate Buildings," by A.J. Durrani and Y. Du, 5/18/92, (PB93-116812, A06, MF-A02).
- NCEER-92-0011 "The Hysteretic and Dynamic Behavior of Brick Masonry Walls Upgraded by Ferrocement Coatings Under Cyclic Loading and Strong Simulated Ground Motion," by H. Lee and S.P. Prawel, 5/11/92, to be published.
- NCEER-92-0012 "Study of Wire Rope Systems for Seismic Protection of Equipment in Buildings," by G.F. Demetriades, M.C. Constantinou and A.M. Reinhorn, 5/20/92, (PB93-116655, A08, MF-A02).

- NCEER-92-0013 "Shape Memory Structural Dampers: Material Properties, Design and Seismic Testing," by P.R. Witting and F.A. Cozzarelli, 5/26/92, (PB93-116663, A05, MF-A01).
- NCEER-92-0014 "Longitudinal Permanent Ground Deformation Effects on Buried Continuous Pipelines," by M.J. O'Rourke, and C. Nordberg, 6/15/92, (PB93-116671, A08, MF-A02).
- NCEER-92-0015 "A Simulation Method for Stationary Gaussian Random Functions Based on the Sampling Theorem," by M. Grigoriu and S. Balopoulou, 6/11/92, (PB93-127496, A05, MF-A01).
- NCEER-92-0016 "Gravity-Load-Designed Reinforced Concrete Buildings: Seismic Evaluation of Existing Construction and Detailing Strategies for Improved Seismic Resistance," by G.W. Hoffmann, S.K. Kunnath, A.M. Reinhorn and J.B. Mander, 7/15/92, (PB94-142007, A08, MF-A02).
- NCEER-92-0017 "Observations on Water System and Pipeline Performance in the Limón Area of Costa Rica Due to the April 22, 1991 Earthquake," by M. O'Rourke and D. Ballantyne, 6/30/92, (PB93-126811, A06, MF-A02).
- NCEER-92-0018 "Fourth Edition of Earthquake Education Materials for Grades K-12," Edited by K.E.K. Ross, 8/10/92, (PB93-114023, A07, MF-A02).
- NCEER-92-0019 "Proceedings from the Fourth Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction," Edited by M. Hamada and T.D. O'Rourke, 8/12/92, (PB93-163939, A99, MF-E11).
- NCEER-92-0020 "Active Bracing System: A Full Scale Implementation of Active Control," by A.M. Reinhorn, T.T. Soong, R.C. Lin, M.A. Riley, Y.P. Wang, S. Aizawa and M. Higashino, 8/14/92, (PB93-127512, A06, MF-A02).
- NCEER-92-0021 "Empirical Analysis of Horizontal Ground Displacement Generated by Liquefaction-Induced Lateral Spreads," by S.F. Bartlett and T.L. Youd, 8/17/92, (PB93-188241, A06, MF-A02).
- NCEER-92-0022 "IDARC Version 3.0: Inelastic Damage Analysis of Reinforced Concrete Structures," by S.K. Kunnath, A.M. Reinhorn and R.F. Lobo, 8/31/92, (PB93-227502, A07, MF-A02).
- NCEER-92-0023 "A Semi-Empirical Analysis of Strong-Motion Peaks in Terms of Seismic Source, Propagation Path and Local Site Conditions, by M. Kamiyama, M.J. O'Rourke and R. Flores-Berrones, 9/9/92, (PB93-150266, A08, MF-A02).
- NCEER-92-0024 "Seismic Behavior of Reinforced Concrete Frame Structures with Nonductile Details, Part I: Summary of Experimental Findings of Full Scale Beam-Column Joint Tests," by A. Beres, R.N. White and P. Gergely, 9/30/92, (PB93-227783, A05, MF-A01).
- NCEER-92-0025 "Experimental Results of Repaired and Retrofitted Beam-Column Joint Tests in Lightly Reinforced Concrete Frame Buildings," by A. Beres, S. El-Borgi, R.N. White and P. Gergely, 10/29/92, (PB93-227791, A05, MF-A01).
- NCEER-92-0026 "A Generalization of Optimal Control Theory: Linear and Nonlinear Structures," by J.N. Yang, Z. Li and S. Vongchavalitkul, 11/2/92, (PB93-188621, A05, MF-A01).
- NCEER-92-0027 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part I - Design and Properties of a One-Third Scale Model Structure," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/1/92, (PB94-104502, A08, MF-A02).
- NCEER-92-0028 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part II - Experimental Performance of Subassemblages," by L.E. Aycaardi, J.B. Mander and A.M. Reinhorn, 12/1/92, (PB94-104510, A08, MF-A02).
- NCEER-92-0029 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part III - Experimental Performance and Analytical Study of a Structural Model," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/1/92, (PB93-227528, A09, MF-A01).

- NCEER-92-0030 "Evaluation of Seismic Retrofit of Reinforced Concrete Frame Structures: Part I - Experimental Performance of Retrofitted Subassemblages," by D. Choudhuri, J.B. Mander and A.M. Reinhorn, 12/8/92, (PB93-198307, A07, MF-A02).
- NCEER-92-0031 "Evaluation of Seismic Retrofit of Reinforced Concrete Frame Structures: Part II - Experimental Performance and Analytical Study of a Retrofitted Structural Model," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/8/92, (PB93-198315, A09, MF-A03).
- NCEER-92-0032 "Experimental and Analytical Investigation of Seismic Response of Structures with Supplemental Fluid Viscous Dampers," by M.C. Constantinou and M.D. Symans, 12/21/92, (PB93-191435, A10, MF-A03). This report is available only through NTIS (see address given above).
- NCEER-92-0033 "Reconnaissance Report on the Cairo, Egypt Earthquake of October 12, 1992," by M. Khater, 12/23/92, (PB93-188621, A03, MF-A01).
- NCEER-92-0034 "Low-Level Dynamic Characteristics of Four Tall Flat-Plate Buildings in New York City," by H. Gavin, S. Yuan, J. Grossman, E. Pekelis and K. Jacob, 12/28/92, (PB93-188217, A07, MF-A02).
- NCEER-93-0001 "An Experimental Study on the Seismic Performance of Brick-Infilled Steel Frames With and Without Retrofit," by J.B. Mander, B. Nair, K. Wojtkowski and J. Ma, 1/29/93, (PB93-227510, A07, MF-A02).
- NCEER-93-0002 "Social Accounting for Disaster Preparedness and Recovery Planning," by S. Cole, E. Pantoja and V. Razak, 2/22/93, (PB94-142114, A12, MF-A03).
- NCEER-93-0003 "Assessment of 1991 NEHRP Provisions for Nonstructural Components and Recommended Revisions," by T.T. Soong, G. Chen, Z. Wu, R-H. Zhang and M. Grigoriu, 3/1/93, (PB93-188639, A06, MF-A02).
- NCEER-93-0004 "Evaluation of Static and Response Spectrum Analysis Procedures of SEAOC/UBC for Seismic Isolated Structures," by C.W. Winters and M.C. Constantinou, 3/23/93, (PB93-198299, A10, MF-A03).
- NCEER-93-0005 "Earthquakes in the Northeast - Are We Ignoring the Hazard? A Workshop on Earthquake Science and Safety for Educators," edited by K.E.K. Ross, 4/2/93, (PB94-103066, A09, MF-A02).
- NCEER-93-0006 "Inelastic Response of Reinforced Concrete Structures with Viscoelastic Braces," by R.F. Lobo, J.M. Bracci, K.L. Shen, A.M. Reinhorn and T.T. Soong, 4/5/93, (PB93-227486, A05, MF-A02).
- NCEER-93-0007 "Seismic Testing of Installation Methods for Computers and Data Processing Equipment," by K. Kosar, T.T. Soong, K.L. Shen, J.A. HoLung and Y.K. Lin, 4/12/93, (PB93-198299, A07, MF-A02).
- NCEER-93-0008 "Retrofit of Reinforced Concrete Frames Using Added Dampers," by A. Reinhorn, M. Constantinou and C. Li, to be published.
- NCEER-93-0009 "Seismic Behavior and Design Guidelines for Steel Frame Structures with Added Viscoelastic Dampers," by K.C. Chang, M.L. Lai, T.T. Soong, D.S. Hao and Y.C. Yeh, 5/1/93, (PB94-141959, A07, MF-A02).
- NCEER-93-0010 "Seismic Performance of Shear-Critical Reinforced Concrete Bridge Piers," by J.B. Mander, S.M. Waheed, M.T.A. Chaudhary and S.S. Chen, 5/12/93, (PB93-227494, A08, MF-A02).
- NCEER-93-0011 "3D-BASIS-TABS: Computer Program for Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures," by S. Nagarajaiah, C. Li, A.M. Reinhorn and M.C. Constantinou, 8/2/93, (PB94-141819, A09, MF-A02).
- NCEER-93-0012 "Effects of Hydrocarbon Spills from an Oil Pipeline Break on Ground Water," by O.J. Helweg and H.H.M. Hwang, 8/3/93, (PB94-141942, A06, MF-A02).
- NCEER-93-0013 "Simplified Procedures for Seismic Design of Nonstructural Components and Assessment of Current Code Provisions," by M.P. Singh, L.E. Suarez, E.E. Matheu and G.O. Maldonado, 8/4/93, (PB94-141827, A09, MF-A02).
- NCEER-93-0014 "An Energy Approach to Seismic Analysis and Design of Secondary Systems," by G. Chen and T.T. Soong, 8/6/93, (PB94-142767, A11, MF-A03).

- NCEER-93-0015 "Proceedings from School Sites: Becoming Prepared for Earthquakes - Commemorating the Third Anniversary of the Loma Prieta Earthquake," Edited by F.E. Winslow and K.E.K. Ross, 8/16/93, (PB94-154275, A16, MF-A02).
- NCEER-93-0016 "Reconnaissance Report of Damage to Historic Monuments in Cairo, Egypt Following the October 12, 1992 Dahshur Earthquake," by D. Sykora, D. Look, G. Croci, E. Karaesmen and E. Karaesmen, 8/19/93, (PB94-142221, A08, MF-A02).
- NCEER-93-0017 "The Island of Guam Earthquake of August 8, 1993," by S.W. Swan and S.K. Harris, 9/30/93, (PB94-141843, A04, MF-A01).
- NCEER-93-0018 "Engineering Aspects of the October 12, 1992 Egyptian Earthquake," by A.W. Elgamal, M. Amer, K. Adalier and A. Abul-Fadl, 10/7/93, (PB94-141983, A05, MF-A01).
- NCEER-93-0019 "Development of an Earthquake Motion Simulator and its Application in Dynamic Centrifuge Testing," by I. Krstelj, Supervised by J.H. Prevost, 10/23/93, (PB94-181773, A-10, MF-A03).
- NCEER-93-0020 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a Friction Pendulum System (FPS)," by M.C. Constantinou, P. Tsopelas, Y-S. Kim and S. Okamoto, 11/1/93, (PB94-142775, A08, MF-A02).
- NCEER-93-0021 "Finite Element Modeling of Elastomeric Seismic Isolation Bearings," by L.J. Billings, Supervised by R. Shepherd, 11/8/93, to be published.
- NCEER-93-0022 "Seismic Vulnerability of Equipment in Critical Facilities: Life-Safety and Operational Consequences," by K. Porter, G.S. Johnson, M.M. Zadeh, C. Scawthorn and S. Eder, 11/24/93, (PB94-181765, A16, MF-A03).
- NCEER-93-0023 "Hokkaido Nansei-oki, Japan Earthquake of July 12, 1993, by P.I. Yanev and C.R. Scawthorn, 12/23/93, (PB94-181500, A07, MF-A01).
- NCEER-94-0001 "An Evaluation of Seismic Serviceability of Water Supply Networks with Application to the San Francisco Auxiliary Water Supply System," by I. Markov, Supervised by M. Grigoriu and T. O'Rourke, 1/21/94, (PB94-204013, A07, MF-A02).
- NCEER-94-0002 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of Systems Consisting of Sliding Bearings, Rubber Restoring Force Devices and Fluid Dampers," Volumes I and II, by P. Tsopelas, S. Okamoto, M.C. Constantinou, D. Ozaki and S. Fujii, 2/4/94, (PB94-181740, A09, MF-A02 and PB94-181757, A12, MF-A03).
- NCEER-94-0003 "A Markov Model for Local and Global Damage Indices in Seismic Analysis," by S. Rahman and M. Grigoriu, 2/18/94, (PB94-206000, A12, MF-A03).
- NCEER-94-0004 "Proceedings from the NCEER Workshop on Seismic Response of Masonry Infills," edited by D.P. Abrams, 3/1/94, (PB94-180783, A07, MF-A02).
- NCEER-94-0005 "The Northridge, California Earthquake of January 17, 1994: General Reconnaissance Report," edited by J.D. Goltz, 3/11/94, (PB94-193943, A10, MF-A03).
- NCEER-94-0006 "Seismic Energy Based Fatigue Damage Analysis of Bridge Columns: Part I - Evaluation of Seismic Capacity," by G.A. Chang and J.B. Mander, 3/14/94, (PB94-219185, A11, MF-A03).
- NCEER-94-0007 "Seismic Isolation of Multi-Story Frame Structures Using Spherical Sliding Isolation Systems," by T.M. Al-Hussaini, V.A. Zayas and M.C. Constantinou, 3/17/94, (PB94-193745, A09, MF-A02).
- NCEER-94-0008 "The Northridge, California Earthquake of January 17, 1994: Performance of Highway Bridges," edited by I.G. Buckle, 3/24/94, (PB94-193851, A06, MF-A02).
- NCEER-94-0009 "Proceedings of the Third U.S.-Japan Workshop on Earthquake Protective Systems for Bridges," edited by I.G. Buckle and I. Friedland, 3/31/94, (PB94-195815, A99, MF-A06).

- NCEER-94-0010 "3D-BASIS-ME: Computer Program for Nonlinear Dynamic Analysis of Seismically Isolated Single and Multiple Structures and Liquid Storage Tanks," by P.C. Tsopelas, M.C. Constantinou and A.M. Reinhorn, 4/12/94, (PB94-204922, A09, MF-A02).
- NCEER-94-0011 "The Northridge, California Earthquake of January 17, 1994: Performance of Gas Transmission Pipelines," by T.D. O'Rourke and M.C. Palmer, 5/16/94, (PB94-204989, A05, MF-A01).
- NCEER-94-0012 "Feasibility Study of Replacement Procedures and Earthquake Performance Related to Gas Transmission Pipelines," by T.D. O'Rourke and M.C. Palmer, 5/25/94, (PB94-206638, A09, MF-A02).
- NCEER-94-0013 "Seismic Energy Based Fatigue Damage Analysis of Bridge Columns: Part II - Evaluation of Seismic Demand," by G.A. Chang and J.B. Mander, 6/1/94, (PB95-18106, A08, MF-A02).
- NCEER-94-0014 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a System Consisting of Sliding Bearings and Fluid Restoring Force/Damping Devices," by P. Tsopelas and M.C. Constantinou, 6/13/94, (PB94-219144, A10, MF-A03).
- NCEER-94-0015 "Generation of Hazard-Consistent Fragility Curves for Seismic Loss Estimation Studies," by H. Hwang and J-R. Huo, 6/14/94, (PB95-181996, A09, MF-A02).
- NCEER-94-0016 "Seismic Study of Building Frames with Added Energy-Absorbing Devices," by W.S. Pong, C.S. Tsai and G.C. Lee, 6/20/94, (PB94-219136, A10, A03).
- NCEER-94-0017 "Sliding Mode Control for Seismic-Excited Linear and Nonlinear Civil Engineering Structures," by J. Yang, J. Wu, A. Agrawal and Z. Li, 6/21/94, (PB95-138483, A06, MF-A02).
- NCEER-94-0018 "3D-BASIS-TABS Version 2.0: Computer Program for Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures," by A.M. Reinhorn, S. Nagarajaiah, M.C. Constantinou, P. Tsopelas and R. Li, 6/22/94, (PB95-182176, A08, MF-A02).
- NCEER-94-0019 "Proceedings of the International Workshop on Civil Infrastructure Systems: Application of Intelligent Systems and Advanced Materials on Bridge Systems," Edited by G.C. Lee and K.C. Chang, 7/18/94, (PB95-252474, A20, MF-A04).
- NCEER-94-0020 "Study of Seismic Isolation Systems for Computer Floors," by V. Lambrou and M.C. Constantinou, 7/19/94, (PB95-138533, A10, MF-A03).
- NCEER-94-0021 "Proceedings of the U.S.-Italian Workshop on Guidelines for Seismic Evaluation and Rehabilitation of Unreinforced Masonry Buildings," Edited by D.P. Abrams and G.M. Calvi, 7/20/94, (PB95-138749, A13, MF-A03).
- NCEER-94-0022 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a System Consisting of Lubricated PTFE Sliding Bearings and Mild Steel Dampers," by P. Tsopelas and M.C. Constantinou, 7/22/94, (PB95-182184, A08, MF-A02).
- NCEER-94-0023 "Development of Reliability-Based Design Criteria for Buildings Under Seismic Load," by Y.K. Wen, H. Hwang and M. Shinozuka, 8/1/94, (PB95-211934, A08, MF-A02).
- NCEER-94-0024 "Experimental Verification of Acceleration Feedback Control Strategies for an Active Tendon System," by S.J. Dyke, B.F. Spencer, Jr., P. Quast, M.K. Sain, D.C. Kaspari, Jr. and T.T. Soong, 8/29/94, (PB95-212320, A05, MF-A01).
- NCEER-94-0025 "Seismic Retrofitting Manual for Highway Bridges," Edited by I.G. Buckle and I.F. Friedland, published by the Federal Highway Administration (PB95-212676, A15, MF-A03).
- NCEER-94-0026 "Proceedings from the Fifth U.S.-Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction," Edited by T.D. O'Rourke and M. Hamada, 11/7/94, (PB95-220802, A99, MF-E08).

- NCEER-95-0001 "Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part 1 - Fluid Viscous Damping Devices," by A.M. Reinhorn, C. Li and M.C. Constantinou, 1/3/95, (PB95-266599, A09, MF-A02).
- NCEER-95-0002 "Experimental and Analytical Study of Low-Cycle Fatigue Behavior of Semi-Rigid Top-And-Seat Angle Connections," by G. Pekcan, J.B. Mander and S.S. Chen, 1/5/95, (PB95-220042, A07, MF-A02).
- NCEER-95-0003 "NCEER-ATC Joint Study on Fragility of Buildings," by T. Anagnos, C. Rojahn and A.S. Kiremidjian, 1/20/95, (PB95-220026, A06, MF-A02).
- NCEER-95-0004 "Nonlinear Control Algorithms for Peak Response Reduction," by Z. Wu, T.T. Soong, V. Gattulli and R.C. Lin, 2/16/95, (PB95-220349, A05, MF-A01).
- NCEER-95-0005 "Pipeline Replacement Feasibility Study: A Methodology for Minimizing Seismic and Corrosion Risks to Underground Natural Gas Pipelines," by R.T. Eguchi, H.A. Seligson and D.G. Honegger, 3/2/95, (PB95-252326, A06, MF-A02).
- NCEER-95-0006 "Evaluation of Seismic Performance of an 11-Story Frame Building During the 1994 Northridge Earthquake," by F. Naeim, R. DiSulio, K. Benuska, A. Reinhorn and C. Li, to be published.
- NCEER-95-0007 "Prioritization of Bridges for Seismic Retrofitting," by N. Basöz and A.S. Kiremidjian, 4/24/95, (PB95-252300, A08, MF-A02).
- NCEER-95-0008 "Method for Developing Motion Damage Relationships for Reinforced Concrete Frames," by A. Singhal and A.S. Kiremidjian, 5/11/95, (PB95-266607, A06, MF-A02).
- NCEER-95-0009 "Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part II - Friction Devices," by C. Li and A.M. Reinhorn, 7/6/95, (PB96-128087, A11, MF-A03).
- NCEER-95-0010 "Experimental Performance and Analytical Study of a Non-Ductile Reinforced Concrete Frame Structure Retrofitted with Elastomeric Spring Dampers," by G. Pekcan, J.B. Mander and S.S. Chen, 7/14/95, (PB96-137161, A08, MF-A02).
- NCEER-95-0011 "Development and Experimental Study of Semi-Active Fluid Damping Devices for Seismic Protection of Structures," by M.D. Symans and M.C. Constantinou, 8/3/95, (PB96-136940, A23, MF-A04).
- NCEER-95-0012 "Real-Time Structural Parameter Modification (RSPM): Development of Innervated Structures," by Z. Liang, M. Tong and G.C. Lee, 4/11/95, (PB96-137153, A06, MF-A01).
- NCEER-95-0013 "Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part III - Viscous Damping Walls," by A.M. Reinhorn and C. Li, 10/1/95, (PB96-176409, A11, MF-A03).
- NCEER-95-0014 "Seismic Fragility Analysis of Equipment and Structures in a Memphis Electric Substation," by J-R. Huo and H.H.M. Hwang, 8/10/95, (PB96-128087, A09, MF-A02).
- NCEER-95-0015 "The Hanshin-Awaji Earthquake of January 17, 1995: Performance of Lifelines," Edited by M. Shinozuka, 11/3/95, (PB96-176383, A15, MF-A03).
- NCEER-95-0016 "Highway Culvert Performance During Earthquakes," by T.L. Youd and C.J. Beckman, available as NCEER-96-0015.
- NCEER-95-0017 "The Hanshin-Awaji Earthquake of January 17, 1995: Performance of Highway Bridges," Edited by I.G. Buckle, 12/1/95, to be published.
- NCEER-95-0018 "Modeling of Masonry Infill Panels for Structural Analysis," by A.M. Reinhorn, A. Madan, R.E. Valles, Y. Reichmann and J.B. Mander, 12/8/95, (PB97-110886, MF-A01, A06).
- NCEER-95-0019 "Optimal Polynomial Control for Linear and Nonlinear Structures," by A.K. Agrawal and J.N. Yang, 12/11/95, (PB96-168737, A07, MF-A02).

- NCEER-95-0020 "Retrofit of Non-Ductile Reinforced Concrete Frames Using Friction Dampers," by R.S. Rao, P. Gergely and R.N. White, 12/22/95, (PB97-133508, A10, MF-A02).
- NCEER-95-0021 "Parametric Results for Seismic Response of Pile-Supported Bridge Bents," by G. Mylonakis, A. Nikolaou and G. Gazetas, 12/22/95, (PB97-100242, A12, MF-A03).
- NCEER-95-0022 "Kinematic Bending Moments in Seismically Stressed Piles," by A. Nikolaou, G. Mylonakis and G. Gazetas, 12/23/95, (PB97-113914, MF-A03, A13).
- NCEER-96-0001 "Dynamic Response of Unreinforced Masonry Buildings with Flexible Diaphragms," by A.C. Costley and D.P. Abrams, 10/10/96, (PB97-133573, MF-A03, A15).
- NCEER-96-0002 "State of the Art Review: Foundations and Retaining Structures," by I. Po Lam, to be published.
- NCEER-96-0003 "Ductility of Rectangular Reinforced Concrete Bridge Columns with Moderate Confinement," by N. Wehbe, M. Saiidi, D. Sanders and B. Douglas, 11/7/96, (PB97-133557, A06, MF-A02).
- NCEER-96-0004 "Proceedings of the Long-Span Bridge Seismic Research Workshop," edited by I.G. Buckle and I.M. Friedland, to be published.
- NCEER-96-0005 "Establish Representative Pier Types for Comprehensive Study: Eastern United States," by J. Kulicki and Z. Prucz, 5/28/96, (PB98-119217, A07, MF-A02).
- NCEER-96-0006 "Establish Representative Pier Types for Comprehensive Study: Western United States," by R. Imbsen, R.A. Schamber and T.A. Osterkamp, 5/28/96, (PB98-118607, A07, MF-A02).
- NCEER-96-0007 "Nonlinear Control Techniques for Dynamical Systems with Uncertain Parameters," by R.G. Ghanem and M.I. Bujakov, 5/27/96, (PB97-100259, A17, MF-A03).
- NCEER-96-0008 "Seismic Evaluation of a 30-Year Old Non-Ductile Highway Bridge Pier and Its Retrofit," by J.B. Mander, B. Mahmoodzadegan, S. Bhadra and S.S. Chen, 5/31/96, (PB97-110902, MF-A03, A10).
- NCEER-96-0009 "Seismic Performance of a Model Reinforced Concrete Bridge Pier Before and After Retrofit," by J.B. Mander, J.H. Kim and C.A. Ligozio, 5/31/96, (PB97-110910, MF-A02, A10).
- NCEER-96-0010 "IDARC2D Version 4.0: A Computer Program for the Inelastic Damage Analysis of Buildings," by R.E. Valles, A.M. Reinhorn, S.K. Kunnath, C. Li and A. Madan, 6/3/96, (PB97-100234, A17, MF-A03).
- NCEER-96-0011 "Estimation of the Economic Impact of Multiple Lifeline Disruption: Memphis Light, Gas and Water Division Case Study," by S.E. Chang, H.A. Seligson and R.T. Eguchi, 8/16/96, (PB97-133490, A11, MF-A03).
- NCEER-96-0012 "Proceedings from the Sixth Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction, Edited by M. Hamada and T. O'Rourke, 9/11/96, (PB97-133581, A99, MF-A06).
- NCEER-96-0013 "Chemical Hazards, Mitigation and Preparedness in Areas of High Seismic Risk: A Methodology for Estimating the Risk of Post-Earthquake Hazardous Materials Release," by H.A. Seligson, R.T. Eguchi, K.J. Tierney and K. Richmond, 11/7/96, (PB97-133565, MF-A02, A08).
- NCEER-96-0014 "Response of Steel Bridge Bearings to Reversed Cyclic Loading," by J.B. Mander, D-K. Kim, S.S. Chen and G.J. Premus, 11/13/96, (PB97-140735, A12, MF-A03).
- NCEER-96-0015 "Highway Culvert Performance During Past Earthquakes," by T.L. Youd and C.J. Beckman, 11/25/96, (PB97-133532, A06, MF-A01).
- NCEER-97-0001 "Evaluation, Prevention and Mitigation of Pounding Effects in Building Structures," by R.E. Valles and A.M. Reinhorn, 2/20/97, (PB97-159552, A14, MF-A03).
- NCEER-97-0002 "Seismic Design Criteria for Bridges and Other Highway Structures," by C. Rojahn, R. Mayes, D.G. Anderson, J. Clark, J.H. Hom, R.V. Nutt and M.J. O'Rourke, 4/30/97, (PB97-194658, A06, MF-A03).

- NCEER-97-0003 "Proceedings of the U.S.-Italian Workshop on Seismic Evaluation and Retrofit," Edited by D.P. Abrams and G.M. Calvi, 3/19/97, (PB97-194666, A13, MF-A03).
- NCEER-97-0004 "Investigation of Seismic Response of Buildings with Linear and Nonlinear Fluid Viscous Dampers," by A.A. Seleemah and M.C. Constantinou, 5/21/97, (PB98-109002, A15, MF-A03).
- NCEER-97-0005 "Proceedings of the Workshop on Earthquake Engineering Frontiers in Transportation Facilities," edited by G.C. Lee and I.M. Friedland, 8/29/97, (PB98-128911, A25, MR-A04).
- NCEER-97-0006 "Cumulative Seismic Damage of Reinforced Concrete Bridge Piers," by S.K. Kunnath, A. El-Bahy, A. Taylor and W. Stone, 9/2/97, (PB98-108814, A11, MF-A03).
- NCEER-97-0007 "Structural Details to Accommodate Seismic Movements of Highway Bridges and Retaining Walls," by R.A. Imbsen, R.A. Schamber, E. Thorkildsen, A. Kartoum, B.T. Martin, T.N. Rosser and J.M. Kulicki, 9/3/97, (PB98-108996, A09, MF-A02).
- NCEER-97-0008 "A Method for Earthquake Motion-Damage Relationships with Application to Reinforced Concrete Frames," by A. Singhal and A.S. Kiremidjian, 9/10/97, (PB98-108988, A13, MF-A03).
- NCEER-97-0009 "Seismic Analysis and Design of Bridge Abutments Considering Sliding and Rotation," by K. Fishman and R. Richards, Jr., 9/15/97, (PB98-108897, A06, MF-A02).
- NCEER-97-0010 "Proceedings of the FHWA/NCEER Workshop on the National Representation of Seismic Ground Motion for New and Existing Highway Facilities," edited by I.M. Friedland, M.S. Power and R.L. Mayes, 9/22/97, (PB98-128903, A21, MF-A04).
- NCEER-97-0011 "Seismic Analysis for Design or Retrofit of Gravity Bridge Abutments," by K.L. Fishman, R. Richards, Jr. and R.C. Divito, 10/2/97, (PB98-128937, A08, MF-A02).
- NCEER-97-0012 "Evaluation of Simplified Methods of Analysis for Yielding Structures," by P. Tsopelas, M.C. Constantinou, C.A. Kircher and A.S. Whittaker, 10/31/97, (PB98-128929, A10, MF-A03).
- NCEER-97-0013 "Seismic Design of Bridge Columns Based on Control and Repairability of Damage," by C-T. Cheng and J.B. Mander, 12/8/97, (PB98-144249, A11, MF-A03).
- NCEER-97-0014 "Seismic Resistance of Bridge Piers Based on Damage Avoidance Design," by J.B. Mander and C-T. Cheng, 12/10/97, (PB98-144223, A09, MF-A02).
- NCEER-97-0015 "Seismic Response of Nominally Symmetric Systems with Strength Uncertainty," by S. Balopoulou and M. Grigoriu, 12/23/97, (PB98-153422, A11, MF-A03).
- NCEER-97-0016 "Evaluation of Seismic Retrofit Methods for Reinforced Concrete Bridge Columns," by T.J. Wipf, F.W. Klaiber and F.M. Russo, 12/28/97, (PB98-144215, A12, MF-A03).
- NCEER-97-0017 "Seismic Fragility of Existing Conventional Reinforced Concrete Highway Bridges," by C.L. Mullen and A.S. Cakmak, 12/30/97, (PB98-153406, A08, MF-A02).
- NCEER-97-0018 "Loss Assessment of Memphis Buildings," edited by D.P. Abrams and M. Shinozuka, 12/31/97, (PB98-144231, A13, MF-A03).
- NCEER-97-0019 "Seismic Evaluation of Frames with Infill Walls Using Quasi-static Experiments," by K.M. Mosalam, R.N. White and P. Gergely, 12/31/97, (PB98-153455, A07, MF-A02).
- NCEER-97-0020 "Seismic Evaluation of Frames with Infill Walls Using Pseudo-dynamic Experiments," by K.M. Mosalam, R.N. White and P. Gergely, 12/31/97, (PB98-153430, A07, MF-A02).
- NCEER-97-0021 "Computational Strategies for Frames with Infill Walls: Discrete and Smeared Crack Analyses and Seismic Fragility," by K.M. Mosalam, R.N. White and P. Gergely, 12/31/97, (PB98-153414, A10, MF-A02).

- NCEER-97-0022 "Proceedings of the NCEER Workshop on Evaluation of Liquefaction Resistance of Soils," edited by T.L. Youd and I.M. Idriss, 12/31/97, (PB98-155617, A15, MF-A03).
- MCEER-98-0001 "Extraction of Nonlinear Hysteretic Properties of Seismically Isolated Bridges from Quick-Release Field Tests," by Q. Chen, B.M. Douglas, E.M. Maragakis and I.G. Buckle, 5/26/98, (PB99-118838, A06, MF-A01).
- MCEER-98-0002 "Methodologies for Evaluating the Importance of Highway Bridges," by A. Thomas, S. Eshenaur and J. Kulicki, 5/29/98, (PB99-118846, A10, MF-A02).
- MCEER-98-0003 "Capacity Design of Bridge Piers and the Analysis of Overstrength," by J.B. Mander, A. Dutta and P. Goel, 6/1/98, (PB99-118853, A09, MF-A02).
- MCEER-98-0004 "Evaluation of Bridge Damage Data from the Loma Prieta and Northridge, California Earthquakes," by N. Basoz and A. Kiremidjian, 6/2/98, (PB99-118861, A15, MF-A03).
- MCEER-98-0005 "Screening Guide for Rapid Assessment of Liquefaction Hazard at Highway Bridge Sites," by T. L. Youd, 6/16/98, (PB99-118879, A06, not available on microfiche).
- MCEER-98-0006 "Structural Steel and Steel/Concrete Interface Details for Bridges," by P. Ritchie, N. Kaulh and J. Kulicki, 7/13/98, (PB99-118945, A06, MF-A01).
- MCEER-98-0007 "Capacity Design and Fatigue Analysis of Confined Concrete Columns," by A. Dutta and J.B. Mander, 7/14/98, (PB99-118960, A14, MF-A03).
- MCEER-98-0008 "Proceedings of the Workshop on Performance Criteria for Telecommunication Services Under Earthquake Conditions," edited by A.J. Schiff, 7/15/98, (PB99-118952, A08, MF-A02).
- MCEER-98-0009 "Fatigue Analysis of Unconfined Concrete Columns," by J.B. Mander, A. Dutta and J.H. Kim, 9/12/98, (PB99-123655, A10, MF-A02).
- MCEER-98-0010 "Centrifuge Modeling of Cyclic Lateral Response of Pile-Cap Systems and Seat-Type Abutments in Dry Sands," by A.D. Gadre and R. Dobry, 10/2/98, (PB99-123606, A13, MF-A03).
- MCEER-98-0011 "IDARC-BRIDGE: A Computational Platform for Seismic Damage Assessment of Bridge Structures," by A.M. Reinhorn, V. Simeonov, G. Mylonakis and Y. Reichman, 10/2/98, (PB99-162919, A15, MF-A03).
- MCEER-98-0012 "Experimental Investigation of the Dynamic Response of Two Bridges Before and After Retrofitting with Elastomeric Bearings," by D.A. Wendichansky, S.S. Chen and J.B. Mander, 10/2/98, (PB99-162927, A15, MF-A03).
- MCEER-98-0013 "Design Procedures for Hinge Restrainers and Hinge Sear Width for Multiple-Frame Bridges," by R. Des Roches and G.L. Fenves, 11/3/98, (PB99-140477, A13, MF-A03).
- MCEER-98-0014 "Response Modification Factors for Seismically Isolated Bridges," by M.C. Constantinou and J.K. Quarshie, 11/3/98, (PB99-140485, A14, MF-A03).
- MCEER-98-0015 "Proceedings of the U.S.-Italy Workshop on Seismic Protective Systems for Bridges," edited by I.M. Friedland and M.C. Constantinou, 11/3/98, (PB2000-101711, A22, MF-A04).
- MCEER-98-0016 "Appropriate Seismic Reliability for Critical Equipment Systems: Recommendations Based on Regional Analysis of Financial and Life Loss," by K. Porter, C. Scawthorn, C. Taylor and N. Blais, 11/10/98, (PB99-157265, A08, MF-A02).
- MCEER-98-0017 "Proceedings of the U.S. Japan Joint Seminar on Civil Infrastructure Systems Research," edited by M. Shinozuka and A. Rose, 11/12/98, (PB99-156713, A16, MF-A03).
- MCEER-98-0018 "Modeling of Pile Footings and Drilled Shafts for Seismic Design," by I. PoLam, M. Kapuskar and D. Chaudhuri, 12/21/98, (PB99-157257, A09, MF-A02).

- MCEER-99-0001 "Seismic Evaluation of a Masonry Infilled Reinforced Concrete Frame by Pseudodynamic Testing," by S.G. Buonopane and R.N. White, 2/16/99, (PB99-162851, A09, MF-A02).
- MCEER-99-0002 "Response History Analysis of Structures with Seismic Isolation and Energy Dissipation Systems: Verification Examples for Program SAP2000," by J. Scheller and M.C. Constantinou, 2/22/99, (PB99-162869, A08, MF-A02).
- MCEER-99-0003 "Experimental Study on the Seismic Design and Retrofit of Bridge Columns Including Axial Load Effects," by A. Dutta, T. Kokorina and J.B. Mander, 2/22/99, (PB99-162877, A09, MF-A02).
- MCEER-99-0004 "Experimental Study of Bridge Elastomeric and Other Isolation and Energy Dissipation Systems with Emphasis on Uplift Prevention and High Velocity Near-source Seismic Excitation," by A. Kasalanati and M. C. Constantinou, 2/26/99, (PB99-162885, A12, MF-A03).
- MCEER-99-0005 "Truss Modeling of Reinforced Concrete Shear-flexure Behavior," by J.H. Kim and J.B. Mander, 3/8/99, (PB99-163693, A12, MF-A03).
- MCEER-99-0006 "Experimental Investigation and Computational Modeling of Seismic Response of a 1:4 Scale Model Steel Structure with a Load Balancing Supplemental Damping System," by G. Pekcan, J.B. Mander and S.S. Chen, 4/2/99, (PB99-162893, A11, MF-A03).
- MCEER-99-0007 "Effect of Vertical Ground Motions on the Structural Response of Highway Bridges," by M.R. Button, C.J. Cronin and R.L. Mayes, 4/10/99, (PB2000-101411, A10, MF-A03).
- MCEER-99-0008 "Seismic Reliability Assessment of Critical Facilities: A Handbook, Supporting Documentation, and Model Code Provisions," by G.S. Johnson, R.E. Sheppard, M.D. Quilici, S.J. Eder and C.R. Scawthorn, 4/12/99, (PB2000-101701, A18, MF-A04).
- MCEER-99-0009 "Impact Assessment of Selected MCEER Highway Project Research on the Seismic Design of Highway Structures," by C. Rojahn, R. Mayes, D.G. Anderson, J.H. Clark, D'Appolonia Engineering, S. Gloyd and R.V. Nutt, 4/14/99, (PB99-162901, A10, MF-A02).
- MCEER-99-0010 "Site Factors and Site Categories in Seismic Codes," by R. Dobry, R. Ramos and M.S. Power, 7/19/99, (PB2000-101705, A08, MF-A02).
- MCEER-99-0011 "Restrainer Design Procedures for Multi-Span Simply-Supported Bridges," by M.J. Randall, M. Saiidi, E. Maragakis and T. Isakovic, 7/20/99, (PB2000-101702, A10, MF-A02).
- MCEER-99-0012 "Property Modification Factors for Seismic Isolation Bearings," by M.C. Constantinou, P. Tsopelas, A. Kasalanati and E. Wolff, 7/20/99, (PB2000-103387, A11, MF-A03).
- MCEER-99-0013 "Critical Seismic Issues for Existing Steel Bridges," by P. Ritchie, N. Kauh and J. Kulicki, 7/20/99, (PB2000-101697, A09, MF-A02).
- MCEER-99-0014 "Nonstructural Damage Database," by A. Kao, T.T. Soong and A. Vender, 7/24/99, (PB2000-101407, A06, MF-A01).
- MCEER-99-0015 "Guide to Remedial Measures for Liquefaction Mitigation at Existing Highway Bridge Sites," by H.G. Cooke and J. K. Mitchell, 7/26/99, (PB2000-101703, A11, MF-A03).
- MCEER-99-0016 "Proceedings of the MCEER Workshop on Ground Motion Methodologies for the Eastern United States," edited by N. Abrahamson and A. Becker, 8/11/99, (PB2000-103385, A07, MF-A02).
- MCEER-99-0017 "Quindío, Colombia Earthquake of January 25, 1999: Reconnaissance Report," by A.P. Asfura and P.J. Flores, 10/4/99, (PB2000-106893, A06, MF-A01).
- MCEER-99-0018 "Hysteretic Models for Cyclic Behavior of Deteriorating Inelastic Structures," by M.V. Sivaselvan and A.M. Reinhorn, 11/5/99, (PB2000-103386, A08, MF-A02).


- MCEER-99-0019 "Proceedings of the 7th U.S.- Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction," edited by T.D. O'Rourke, J.P. Bardet and M. Hamada, 11/19/99, (PB2000-103354, A99, MF-A06).
- MCEER-99-0020 "Development of Measurement Capability for Micro-Vibration Evaluations with Application to Chip Fabrication Facilities," by G.C. Lee, Z. Liang, J.W. Song, J.D. Shen and W.C. Liu, 12/1/99, (PB2000-105993, A08, MF-A02).
- MCEER-99-0021 "Design and Retrofit Methodology for Building Structures with Supplemental Energy Dissipating Systems," by G. Pekcan, J.B. Mander and S.S. Chen, 12/31/99, (PB2000-105994, A11, MF-A03).
- MCEER-00-0001 "The Marmara, Turkey Earthquake of August 17, 1999: Reconnaissance Report," edited by C. Scawthorn; with major contributions by M. Bruneau, R. Eguchi, T. Holzer, G. Johnson, J. Mander, J. Mitchell, W. Mitchell, A. Papageorgiou, C. Scaethorn, and G. Webb, 3/23/00, (PB2000-106200, A11, MF-A03).
- MCEER-00-0002 "Proceedings of the MCEER Workshop for Seismic Hazard Mitigation of Health Care Facilities," edited by G.C. Lee, M. Ettouney, M. Grigoriu, J. Hauer and J. Nigg, 3/29/00, (PB2000-106892, A08, MF-A02).
- MCEER-00-0003 "The Chi-Chi, Taiwan Earthquake of September 21, 1999: Reconnaissance Report," edited by G.C. Lee and C.H. Loh, with major contributions by G.C. Lee, M. Bruneau, I.G. Buckle, S.E. Chang, P.J. Flores, T.D. O'Rourke, M. Shinozuka, T.T. Soong, C-H. Loh, K-C. Chang, Z-J. Chen, J-S. Hwang, M-L. Lin, G-Y. Liu, K-C. Tsai, G.C. Yao and C-L. Yen, 4/30/00, (PB2001-100980, A10, MF-A02).
- MCEER-00-0004 "Seismic Retrofit of End-Sway Frames of Steel Deck-Truss Bridges with a Supplemental Tendon System: Experimental and Analytical Investigation," by G. Pekcan, J.B. Mander and S.S. Chen, 7/1/00, (PB2001-100982, A10, MF-A02).
- MCEER-00-0005 "Sliding Fragility of Unrestrained Equipment in Critical Facilities," by W.H. Chong and T.T. Soong, 7/5/00, (PB2001-100983, A08, MF-A02).
- MCEER-00-0006 "Seismic Response of Reinforced Concrete Bridge Pier Walls in the Weak Direction," by N. Abo-Shadi, M. Saiidi and D. Sanders, 7/17/00, (PB2001-100981, A17, MF-A03).
- MCEER-00-0007 "Low-Cycle Fatigue Behavior of Longitudinal Reinforcement in Reinforced Concrete Bridge Columns," by J. Brown and S.K. Kunnath, 7/23/00, (PB2001-104392, A08, MF-A02).
- MCEER-00-0008 "Soil Structure Interaction of Bridges for Seismic Analysis," I. PoLam and H. Law, 9/25/00, (PB2001-105397, A08, MF-A02).
- MCEER-00-0009 "Proceedings of the First MCEER Workshop on Mitigation of Earthquake Disaster by Advanced Technologies (MEDAT-1), edited by M. Shinozuka, D.J. Inman and T.D. O'Rourke, 11/10/00, (PB2001-105399, A14, MF-A03).
- MCEER-00-0010 "Development and Evaluation of Simplified Procedures for Analysis and Design of Buildings with Passive Energy Dissipation Systems," by O.M. Ramirez, M.C. Constantinou, C.A. Kircher, A.S. Whittaker, M.W. Johnson, J.D. Gomez and C. Chrysostomou, 11/16/01, (PB2001-105523, A23, MF-A04).
- MCEER-00-0011 "Dynamic Soil-Foundation-Structure Interaction Analyses of Large Caissons," by C-Y. Chang, C-M. Mok, Z-L. Wang, R. Settgast, F. Waggoner, M.A. Ketchum, H.M. Gonnermann and C-C. Chin, 12/30/00, (PB2001-104373, A07, MF-A02).
- MCEER-00-0012 "Experimental Evaluation of Seismic Performance of Bridge Restrainers," by A.G. Vlassis, E.M. Maragakis and M. Saiid Saiidi, 12/30/00, (PB2001-104354, A09, MF-A02).
- MCEER-00-0013 "Effect of Spatial Variation of Ground Motion on Highway Structures," by M. Shinozuka, V. Saxena and G. Deodatis, 12/31/00, (PB2001-108755, A13, MF-A03).
- MCEER-00-0014 "A Risk-Based Methodology for Assessing the Seismic Performance of Highway Systems," by S.D. Werner, C.E. Taylor, J.E. Moore, II, J.S. Walton and S. Cho, 12/31/00, (PB2001-108756, A14, MF-A03).

- MCEER-01-0001 “Experimental Investigation of P-Delta Effects to Collapse During Earthquakes,” by D. Vian and M. Bruneau, 6/25/01, (PB2002-100534, A17, MF-A03).
- MCEER-01-0002 “Proceedings of the Second MCEER Workshop on Mitigation of Earthquake Disaster by Advanced Technologies (MEDAT-2),” edited by M. Bruneau and D.J. Inman, 7/23/01, (PB2002-100434, A16, MF-A03).
- MCEER-01-0003 “Sensitivity Analysis of Dynamic Systems Subjected to Seismic Loads,” by C. Roth and M. Grigoriu, 9/18/01, (PB2003-100884, A12, MF-A03).
- MCEER-01-0004 “Overcoming Obstacles to Implementing Earthquake Hazard Mitigation Policies: Stage 1 Report,” by D.J. Alesch and W.J. Petak, 12/17/01, (PB2002-107949, A07, MF-A02).
- MCEER-01-0005 “Updating Real-Time Earthquake Loss Estimates: Methods, Problems and Insights,” by C.E. Taylor, S.E. Chang and R.T. Eguchi, 12/17/01, (PB2002-107948, A05, MF-A01).
- MCEER-01-0006 “Experimental Investigation and Retrofit of Steel Pile Foundations and Pile Bents Under Cyclic Lateral Loadings,” by A. Shama, J. Mander, B. Blabac and S. Chen, 12/31/01, (PB2002-107950, A13, MF-A03).
- MCEER-02-0001 “Assessment of Performance of Bolu Viaduct in the 1999 Duzce Earthquake in Turkey” by P.C. Roussis, M.C. Constantinou, M. Erdik, E. Durukal and M. Dicleli, 5/8/02, (PB2003-100883, A08, MF-A02).
- MCEER-02-0002 “Seismic Behavior of Rail Counterweight Systems of Elevators in Buildings,” by M.P. Singh, Rildova and L.E. Suarez, 5/27/02, (PB2003-100882, A11, MF-A03).
- MCEER-02-0003 “Development of Analysis and Design Procedures for Spread Footings,” by G. Mylonakis, G. Gazetas, S. Nikolaou and A. Chauncey, 10/02/02, (PB2004-101636, A13, MF-A03, CD-A13).
- MCEER-02-0004 “Bare-Earth Algorithms for Use with SAR and LIDAR Digital Elevation Models,” by C.K. Huyck, R.T. Eguchi and B. Houshmand, 10/16/02, (PB2004-101637, A07, CD-A07).
- MCEER-02-0005 “Review of Energy Dissipation of Compression Members in Concentrically Braced Frames,” by K. Lee and M. Bruneau, 10/18/02, (PB2004-101638, A10, CD-A10).
- MCEER-03-0001 “Experimental Investigation of Light-Gauge Steel Plate Shear Walls for the Seismic Retrofit of Buildings” by J. Berman and M. Bruneau, 5/2/03, (PB2004-101622, A10, MF-A03, CD-A10).
- MCEER-03-0002 “Statistical Analysis of Fragility Curves,” by M. Shinozuka, M.Q. Feng, H. Kim, T. Uzawa and T. Ueda, 6/16/03, (PB2004-101849, A09, CD-A09).
- MCEER-03-0003 “Proceedings of the Eighth U.S.-Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Liquefaction,” edited by M. Hamada, J.P. Bardet and T.D. O’Rourke, 6/30/03, (PB2004-104386, A99, CD-A99).
- MCEER-03-0004 “Proceedings of the PRC-US Workshop on Seismic Analysis and Design of Special Bridges,” edited by L.C. Fan and G.C. Lee, 7/15/03, (PB2004-104387, A14, CD-A14).
- MCEER-03-0005 “Urban Disaster Recovery: A Framework and Simulation Model,” by S.B. Miles and S.E. Chang, 7/25/03, (PB2004-104388, A07, CD-A07).
- MCEER-03-0006 “Behavior of Underground Piping Joints Due to Static and Dynamic Loading,” by R.D. Meis, M. Maragakis and R. Siddharthan, 11/17/03, (PB2005-102194, A13, MF-A03, CD-A00).
- MCEER-03-0007 “Seismic Vulnerability of Timber Bridges and Timber Substructures,” by A.A. Shama, J.B. Mander, I.M. Friedland and D.R. Allicock, 12/15/03.
- MCEER-04-0001 “Experimental Study of Seismic Isolation Systems with Emphasis on Secondary System Response and Verification of Accuracy of Dynamic Response History Analysis Methods,” by E. Wolff and M. Constantinou, 1/16/04 (PB2005-102195, A99, MF-E08, CD-A00).

- MCEER-04-0002 "Tension, Compression and Cyclic Testing of Engineered Cementitious Composite Materials," by K. Kesner and S.L. Billington, 3/1/04, (PB2005-102196, A08, CD-A08).
- MCEER-04-0003 "Cyclic Testing of Braces Laterally Restrained by Steel Studs to Enhance Performance During Earthquakes," by O.C. Celik, J.W. Berman and M. Bruneau, 3/16/04, (PB2005-102197, A13, MF-A03, CD-A00).
- MCEER-04-0004 "Methodologies for Post Earthquake Building Damage Detection Using SAR and Optical Remote Sensing: Application to the August 17, 1999 Marmara, Turkey Earthquake," by C.K. Huyck, B.J. Adams, S. Cho, R.T. Eguchi, B. Mansouri and B. Houshmand, 6/15/04, (PB2005-104888, A10, CD-A00).
- MCEER-04-0005 "Nonlinear Structural Analysis Towards Collapse Simulation: A Dynamical Systems Approach," by M.V. Sivaselvan and A.M. Reinhorn, 6/16/04, (PB2005-104889, A11, MF-A03, CD-A00).
- MCEER-04-0006 "Proceedings of the Second PRC-US Workshop on Seismic Analysis and Design of Special Bridges," edited by G.C. Lee and L.C. Fan, 6/25/04, (PB2005-104890, A16, CD-A00).
- MCEER-04-0007 "Seismic Vulnerability Evaluation of Axially Loaded Steel Built-up Laced Members," by K. Lee and M. Bruneau, 6/30/04, (PB2005-104891, A16, CD-A00).
- MCEER-04-0008 "Evaluation of Accuracy of Simplified Methods of Analysis and Design of Buildings with Damping Systems for Near-Fault and for Soft-Soil Seismic Motions," by E.A. Pavlou and M.C. Constantinou, 8/16/04, (PB2005-104892, A08, MF-A02, CD-A00).
- MCEER-04-0009 "Assessment of Geotechnical Issues in Acute Care Facilities in California," by M. Lew, T.D. O'Rourke, R. Dobry and M. Koch, 9/15/04, (PB2005-104893, A08, CD-A00).
- MCEER-04-0010 "Scissor-Jack-Damper Energy Dissipation System," by A.N. Sigaher-Boyle and M.C. Constantinou, 12/1/04 (PB2005-108221).
- MCEER-04-0011 "Seismic Retrofit of Bridge Steel Truss Piers Using a Controlled Rocking Approach," by M. Pollino and M. Bruneau, 12/20/04 (PB2006-105795).
- MCEER-05-0001 "Experimental and Analytical Studies of Structures Seismically Isolated with an Uplift-Restraint Isolation System," by P.C. Roussis and M.C. Constantinou, 1/10/05 (PB2005-108222).
- MCEER-05-0002 "A Versatile Experimentation Model for Study of Structures Near Collapse Applied to Seismic Evaluation of Irregular Structures," by D. Kusumastuti, A.M. Reinhorn and A. Rutenberg, 3/31/05 (PB2006-101523).
- MCEER-05-0003 "Proceedings of the Third PRC-US Workshop on Seismic Analysis and Design of Special Bridges," edited by L.C. Fan and G.C. Lee, 4/20/05, (PB2006-105796).
- MCEER-05-0004 "Approaches for the Seismic Retrofit of Braced Steel Bridge Piers and Proof-of-Concept Testing of an Eccentrically Braced Frame with Tubular Link," by J.W. Berman and M. Bruneau, 4/21/05 (PB2006-101524).
- MCEER-05-0005 "Simulation of Strong Ground Motions for Seismic Fragility Evaluation of Nonstructural Components in Hospitals," by A. Wanitkorkul and A. Filiatrault, 5/26/05 (PB2006-500027).
- MCEER-05-0006 "Seismic Safety in California Hospitals: Assessing an Attempt to Accelerate the Replacement or Seismic Retrofit of Older Hospital Facilities," by D.J. Alesch, L.A. Arendt and W.J. Petak, 6/6/05 (PB2006-105794).
- MCEER-05-0007 "Development of Seismic Strengthening and Retrofit Strategies for Critical Facilities Using Engineered Cementitious Composite Materials," by K. Kesner and S.L. Billington, 8/29/05 (PB2006-111701).
- MCEER-05-0008 "Experimental and Analytical Studies of Base Isolation Systems for Seismic Protection of Power Transformers," by N. Murota, M.Q. Feng and G-Y. Liu, 9/30/05 (PB2006-111702).
- MCEER-05-0009 "3D-BASIS-ME-MB: Computer Program for Nonlinear Dynamic Analysis of Seismically Isolated Structures," by P.C. Tsopelas, P.C. Roussis, M.C. Constantinou, R. Buchanan and A.M. Reinhorn, 10/3/05 (PB2006-111703).

- MCEER-05-0010 “Steel Plate Shear Walls for Seismic Design and Retrofit of Building Structures,” by D. Vian and M. Bruneau, 12/15/05 (PB2006-111704).
- MCEER-05-0011 “The Performance-Based Design Paradigm,” by M.J. Astrella and A. Whittaker, 12/15/05 (PB2006-111705).
- MCEER-06-0001 “Seismic Fragility of Suspended Ceiling Systems,” H. Badillo-Almaraz, A.S. Whittaker, A.M. Reinhorn and G.P. Cimellaro, 2/4/06 (PB2006-111706).
- MCEER-06-0002 “Multi-Dimensional Fragility of Structures,” by G.P. Cimellaro, A.M. Reinhorn and M. Bruneau, 3/1/06 (PB2007-106974, A09, MF-A02, CD A00).
- MCEER-06-0003 “Built-Up Shear Links as Energy Dissipators for Seismic Protection of Bridges,” by P. Dusicka, A.M. Itani and I.G. Buckle, 3/15/06 (PB2006-111708).
- MCEER-06-0004 “Analytical Investigation of the Structural Fuse Concept,” by R.E. Vargas and M. Bruneau, 3/16/06 (PB2006-111709).
- MCEER-06-0005 “Experimental Investigation of the Structural Fuse Concept,” by R.E. Vargas and M. Bruneau, 3/17/06 (PB2006-111710).
- MCEER-06-0006 “Further Development of Tubular Eccentrically Braced Frame Links for the Seismic Retrofit of Braced Steel Truss Bridge Piers,” by J.W. Berman and M. Bruneau, 3/27/06 (PB2007-105147).
- MCEER-06-0007 “REDARS Validation Report,” by S. Cho, C.K. Huyck, S. Ghosh and R.T. Eguchi, 8/8/06 (PB2007-106983).
- MCEER-06-0008 “Review of Current NDE Technologies for Post-Earthquake Assessment of Retrofitted Bridge Columns,” by J.W. Song, Z. Liang and G.C. Lee, 8/21/06 06 (PB2007-106984).
- MCEER-06-0009 “Liquefaction Remediation in Silty Soils Using Dynamic Compaction and Stone Columns,” by S. Thevanayagam, G.R. Martin, R. Nashed, T. Shenthana, T. Kanagalingam and N. Ecmis, 8/28/06 06 (PB2007-106985).
- MCEER-06-0010 “Conceptual Design and Experimental Investigation of Polymer Matrix Composite Infill Panels for Seismic Retrofitting,” by W. Jung, M. Chiewanichakorn and A.J. Aref, 9/21/06 (PB2007-106986).
- MCEER-06-0011 “A Study of the Coupled Horizontal-Vertical Behavior of Elastomeric and Lead-Rubber Seismic Isolation Bearings,” by G.P. Warn and A.S. Whittaker, 9/22/06 (PB2007-108679).
- MCEER-06-0012 “Proceedings of the Fourth PRC-US Workshop on Seismic Analysis and Design of Special Bridges: Advancing Bridge Technologies in Research, Design, Construction and Preservation,” Edited by L.C. Fan, G.C. Lee and L. Ziang, 10/12/06.
- MCEER-06-0013 “Cyclic Response and Low Cycle Fatigue Characteristics of Plate Steels,” by P. Dusicka, A.M. Itani and I.G. Buckle, 11/1/06 06 (PB2007-106987).
- MCEER-06-0014 “Proceedings of the Second US-Taiwan Bridge Engineering Workshop,” edited by W.P. Yen, J. Shen, J-Y. Chen and M. Wang, 11/15/06.
- MCEER-06-0015 “User Manual and Technical Documentation for the REDARSTM Import Wizard,” by S. Cho, S. Ghosh, C.K. Huyck and S.D. Werner, 11/30/06.
- MCEER-06-0016 “Hazard Mitigation Strategy and Monitoring Technologies for Urban and Infrastructure Public Buildings: Proceedings of the China-US Workshops,” edited by X.Y. Zhou, A.L. Zhang, G.C. Lee and M. Tong, 12/12/06.
- MCEER-07-0001 “Static and Kinetic Coefficients of Friction for Rigid Blocks,” by C. Kafali, S. Fathali, M. Grigoriu and A.S. Whittaker, 3/20/07.
- MCEER-07-0002 “Hazard Mitigation Investment Decision Making: Organizational Response to Legislative Mandate,” by L.A. Arendt, D.J. Alesch and W.J. Petak, 4/9/07.

- MCEER-07-0003 “Seismic Behavior of Bidirectional-Resistant Ductile End Diaphragms with Unbonded Braces in Straight or Skewed Steel Bridges,” by O. Celik and M. Bruneau, 4/11/07.
- MCEER-07-0004 “Modeling Pile Behavior in Large Pile Groups Under Lateral Loading,” by A.M. Dodds and G.R. Martin, 4/16/07.
- MCEER-07-0005 “Experimental Investigation of Blast Performance of Seismically Resistant Concrete-Filled Steel Tube Bridge Piers,” by S. Fujikura, M. Bruneau and D. Lopez-Garcia, 4/20/07.
- MCEER-07-0006 “Seismic Analysis of Conventional and Isolated Liquefied Natural Gas Tanks Using Mechanical Analogs,” by I.P. Christovasilis and A.S. Whittaker, 5/1/07.
- MCEER-07-0007 “Experimental Seismic Performance Evaluation of Isolation/Restraint Systems for Mechanical Equipment – Part 1: Heavy Equipment Study,” by S. Fathali and A. Filiatrault, 6/6/07.
- MCEER-07-0008 “Seismic Vulnerability of Timber Bridges and Timber Substructures,” by A.A. Sharma, J.B. Mander, I.M. Friedland and D.R. Allicock, 6/7/07.
- MCEER-07-0009 “Experimental and Analytical Study of the XY-Friction Pendulum (XY-FP) Bearing for Bridge Applications,” by C.C. Marin-Artieda, A.S. Whittaker and M.C. Constantinou, 6/7/07.
- MCEER-07-0010 “Proceedings of the PRC-US Earthquake Engineering Forum for Young Researchers,” Edited by G.C. Lee and X.Z. Qi, 6/8/07.
- MCEER-07-0011 “Design Recommendations for Perforated Steel Plate Shear Walls,” by R. Purba and M. Bruneau, 6/18/07.
- MCEER-07-0012 “Performance of Seismic Isolation Hardware Under Service and Seismic Loading,” by M.C. Constantinou, A.S. Whittaker, Y. Kalpakidis, D.M. Fenz and G.P. Warn, 8/27/07.
- MCEER-07-0013 “Experimental Evaluation of the Seismic Performance of Hospital Piping Subassemblies,” by E.R. Goodwin, E. Maragakis and A.M. Itani, 9/4/07.
- MCEER-07-0014 “A Simulation Model of Urban Disaster Recovery and Resilience: Implementation for the 1994 Northridge Earthquake,” by S. Miles and S.E. Chang, 9/7/07.

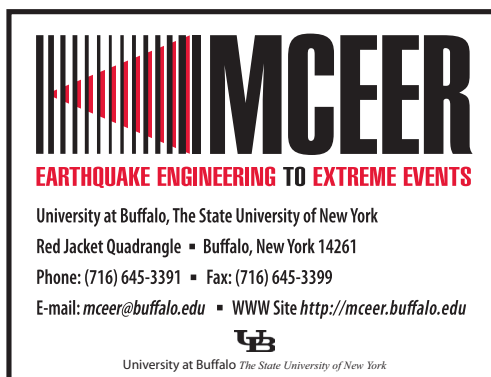

ISSN 1520-295X