

NATIONAL CENTER FOR EARTHQUAKE  
ENGINEERING RESEARCH

State University of New York at Buffalo

---

---

STOCHASTIC FINITE ELEMENT EXPANSION  
FOR RANDOM MEDIA

by

P. D. Spanos and R. Ghanem

Department of Civil Engineering and Mechanical Engineering  
Rice University  
Houston, Texas 77251

Technical Report NCEER-88-0005


March 14, 1988

This research was conducted at Rice University and was partially supported by the National Science Foundation under Grant No. ECE 86-07591.

## NOTICE

This report was prepared by Rice University as a result of research sponsored by the National Center for Earthquake Engineering Research (NCEER). Neither NCEER, associates of NCEER, its sponsors, Rice University, nor any person acting on their behalf:

- a. makes any warranty, express or implied, with respect to the use of any information, apparatus, method, or process disclosed in this report or that such use may not infringe upon privately owned rights; or
- b. assumes any liabilities of whatsoever kind with respect to the use of, or for damages resulting from the use of, any information, apparatus, method or process disclosed in this report.



---

**STOCHASTIC FINITE ELEMENT  
EXPANSION FOR RANDOM MEDIA**

by

P.D. Spanos<sup>1</sup> and Roger Ghanem<sup>2</sup>

March 14, 1988

Technical Report NCEER-88-0005

NCEER Contract Number 86-3024

NSF Master Contract Number ECE 86-07591

1 Professor, Dept. of Civil Engineering and Dept. of Mechanical Engineering, Rice University

2 Graduate Student, Dept. of Civil Engineering, Rice University

NATIONAL CENTER FOR EARTHQUAKE ENGINEERING RESEARCH

State University of New York at Buffalo

Red Jacket Quadrangle, Buffalo, NY 14261

---



## ABSTRACT

A new method for the solution of problems involving random media is proposed. The medium property is represented by a stochastic process. The method makes use of an orthogonal expansion of the process with a finite set of random variables and leads to a formulation compatible with the finite element method. The usefulness of the method, in terms of accuracy and efficiency, is exemplified by considering a cantilever beam with random rigidity.



## TABLE OF CONTENTS

SECTION	TITLE	PAGE
1	INTRODUCTION .....	1-1
2	ORTHOGONAL EXPANSION .....	2-1
3	EXAMPLES OF KERNEL EXPANSION .....	3-1
3.1	Exponential Covariance .....	3-1
3.2	Triangular Covariance.....	3-3
4	FINITE ELEMENT FORMULATION.....	4-1
5	NUMERICAL EXAMPLE .....	5-1
6	SUMMARY .....	6-1
7	REFERENCES.....	7-1
8	NOTATION.....	8-1





## LIST OF ILLUSTRATIONS

FIGURE	TITLE	PAGE
3-1	Exact Exponential Covariance; $c=1.0$ .....	3-5
3-2	Approximate Exponential Covariance; $c=1.0, r=4$ .....	3-6
3-3	Exact Triangular Covariance; $d=0.5$ .....	3-7
3-4	Approximate Triangular Covariance; $d=0.5, r=4$ .....	3-8
5-1	Beam with Random Bending Rigidity under Uniform Load; Exponential and Triangular Covariance Models .....	5-4
5-2	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance, $k+1=2$ .....	5-5
5-3	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance, $k+1=4$ .....	5-6
5-4	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance, $k+1=6$ .....	5-7
5-5	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance, $k+1=8$ .....	5-8
5-6	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance, $k+1=2$ .....	5-9
5-7	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance, $k+1=4$ .....	5-10
5-8	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance, $k+1=6$ .....	5-11
5-9	Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance, $k+1=8$ .....	5-12



## LIST OF TABLES

TABLE	TITLE	PAGE
1	Comparison of the Computation Time Required by the Proposed Method to That Required by the Monte Carlo Simulation Method .....	5-3



# SECTION I

## INTRODUCTION

The reliability of many engineering structures in the presence of uncertainty has been a crucial factor in their analysis and design. Primary and secondary systems related to structures such as nuclear power containments, space vehicles, and offshore platforms may be quite sensitive to small imperfections of pertinent design variables. Several of these variables are inherently random and can be most appropriately modeled as random processes. They may include quantities such as modulus of elasticity, poisson ratio, shear strength, ocean wave height, and a variety of other physical and mathematical parameters ( Vanmarcke, 1977 ; Burnside, 1985 ). Clearly, the complexity of these modern structures requires the use of versatile numerical algorithms, such as the finite element method, to obtain accurate mathematical approximations to their physical behavior. Thus, a challenging task to the analyst is to accurately account for the randomness in a given problem while using some proven numerical algorithm. The result from such an analysis can be in the form of statistical quantities describing the response.

A number of researchers have attempted to solve problems with random media introducing assumptions of various degrees of severity. Collins and Thompson ( 1969 ) treated the eigenvalue problem for random systems using first order perturbation. Hart and Collins ( 1970 ) dealt with randomness in finite element modeling, using again first order perturbation. Nakagiri and Hisada ( 1982 ) initiated a series of investigations related to perturbation analysis in stochastic finite elements and concluded that the second order perturbation is impractical due to the scale of the requisite computational effort. The first order perturbation, however, gives rather crude approximations to the solutions. Therefore, it is of limited value. In all the approaches mentioned above, the medium randomness is accounted for by means of random variables. Shinozuka and various co-workers investigated probabilistic models for spatial distribution of material properties ( 1987 ). He used simulation methods ( Shinozuka and Lenoe, 1976 ) and the Neuman expansion method ( Yamazaki, Shinozuka and Dasgupta, 1986 ) to obtain the statistical properties of the response. Also, Shinozuka ( 1987 ) obtained analytical solutions for a class of statically determined structural members. The Neumann expansion was also used by Adomian ( 1984 ) and by Benaroya and Rehak (1987).

The present paper suggests a new method for solving problems involving random media. The random process describing the medium is expanded in an orthogonal decomposition ( Loeve, 1977 ) which is then incorporated in a finite element formulation of the problem. The method is appealing in that simulation is not required for the solution, and only the average stiffness matrix needs to be inverted. Further, since the orthogonal decomposition is derived from the spectral theorem for positive definite operators ( Mercer, 1909 ), it possesses some desirable convergence properties. Finally, the computational efficiency and the accuracy of its results for a wide range of problems may be the basis of a substantial improvement over available methods.

In the next section, the orthogonal decomposition for a one-parameter random process is derived. Next, a finite element formulation that incorporates the expansion is developed. Finally, a numerical example is discussed, and pertinent results are compared with those obtained from a Monte-Carlo simulation of the problem.

## SECTION 2

### ORTHOGONAL EXPANSION

Let  $S(x)$  denote a random process, a function of the position  $x$  defined over the domain  $L$ . Let  $\bar{S}(x)$  denote the expected value of  $S(x)$  over all possible realizations of the process, and  $C(x, \xi)$  denote its covariance function associated with locations  $x$  and  $\xi$ . By definition, the covariance function is bounded, symmetric, and positive definite. Thus, it has the spectral decomposition

$$C(x, \xi) = \sum_{n=0}^{\infty} \lambda_n \phi_n(x) \phi_n(\xi) . \quad (1)$$

where  $\lambda_n$  and  $\phi_n$  are the eigenvalue and the eigenvector of the covariance kernel, respectively. That is, they are the solution to the integral equation

$$\int_L C(x, \xi) \phi_n(x) d\xi = \lambda_n \phi_n(x) . \quad (2)$$

Due to the symmetry and the positive-definiteness of the covariance kernel ( Loeve, 1977 ), its eigenfunctions form a complete set and they are orthogonal satisfying the equation

$$\int_L \phi_n(x) \phi_m(x) dx = \delta_{nm} , \quad (3)$$

where  $\delta_{nm}$  is the Kronecker delta. The process  $S(x)$  can be written as

$$S(x) = \bar{S}(x) + \Delta S(x) , \quad (4)$$

where  $\Delta S(x)$  as defined by equation (4) denotes a process with zero mean and covariance function  $C(x, \xi)$ . The process  $\Delta S(x)$  can be expanded in terms of  $\phi_n$  as

$$\Delta S(x) = \sum_{n=0}^{\infty} b_n \sqrt{\lambda_n} \phi_n(x) , \quad (5)$$

where  $b_n$  is a random coefficient independent of  $x$ . In order to determine  $b_n$ , multiply both sides of equation (4) by  $\Delta S(\xi)$  and take the expectation on both sides. Then,

$$\begin{aligned} C(x, \xi) &= E \left[ \Delta S(x) \Delta S(\xi) \right] \\ &= \sum_{n=0}^{\infty} \sum_{m=0}^{\infty} E \left[ b_n b_m \right] \sqrt{\lambda_n \lambda_m} \phi_n(x) \phi_m(\xi) , \end{aligned} \quad (6)$$

where  $E[.]$  denotes the operator of mathematical expectation. Multiplying equation (6) by  $\phi_k(\xi)$ , integrating over the domain  $L$ , and making use of the orthogonality of  $\{ \phi_n \}$  yield

$$\begin{aligned} \int_L C(x, \xi) \phi_k(\xi) d\xi &= \lambda_k \phi_k(x) \\ &= \sum_{n=0}^{\infty} E \left[ b_n b_k \right] \sqrt{\lambda_n \lambda_k} \phi_n(x) . \end{aligned} \quad (7)$$

Again, multiplying equation (7) by  $\phi_1(x)$  and integrating gives

$$\lambda_k \int_L \phi_k(x) \phi_1(x) dx = \sum_{n=0}^{\infty} E [b_n b_k] \sqrt{\lambda_n \lambda_k} \delta_{n1}. \quad (8)$$

Then, using equation (3) leads to

$$\lambda_k \delta_{k1} = \sqrt{\lambda_k \lambda_1} E [b_k b_1]. \quad (9)$$

Equation (9) can be rearranged to give

$$E [b_k b_1] = \delta_{k1}. \quad (10)$$

Thus, the random process  $S(x)$  can be written as

$$S(x) = \bar{S}(x) + \sum_{n=0}^{\infty} b_n \sqrt{\lambda_n} \phi_n(x), \quad (11)$$

where

$$E [b_n] = 0, \quad E [b_n b_m] = \delta_{nm}, \quad (12)$$

and  $\lambda_n, \phi_n$  satisfy equation (2). The series in equation (11) is known to converge in the mean square. Further, if  $S(x)$  is a gaussian process, the series can be shown to also converge almost surely (Loeve, 1977). Truncating the series in equation (11) at the  $r^{\text{th}}$  term gives

$$S(x) = \bar{S}(x) + \sum_{n=0}^r b_n \sqrt{\lambda_n} \phi_n(x). \quad (13)$$

Note that the above expansion is optimal in the Fourier expansion sense. That is, it minimizes the mean squared approximation error resulting from truncating the series at a finite number of terms. Further, equation (13) is an expression for the projection of the random process  $S(x)$ , viewed as a curve in a Hilbert space, onto an  $r$  dimensional subspace. The expansion is used extensively in the field of pattern recognition and image processing as an efficient tool to store random processes (Devijver and Kittler, 1982). Of special interest in earthquake engineering, is the potential of the expansion in generating realizations of multidimensional and nonstationary random processes associated with earthquakes such as ground motion and material variability. Note that since the random process  $S(x)$  is defined over a finite domain, it is not ergodic. This fact does not affect the solvability of the class of problems being investigated herein; it eliminates an assumption necessary to other approaches.

In the special case where the random process  $S(x)$  possesses a rational spectrum, the integral eigenvalue problem can be replaced by an equivalent differential equation which is more tractable mathematically (Van Trees, 1968).



## SECTION 3

### EXAMPLES OF KERNEL EXPANSION

As an example of the orthogonal expansion discussed above, two quite common covariance kernels are discussed in this section.

#### 3.1 Exponential Covariance

Consider the covariance kernel defined by the equation

$$C(x, \xi) = \sigma_s^2 e^{-c|x-\xi|}, \quad (14)$$

where  $\sigma_s$  denotes the standard deviation of the random process under consideration. Clearly,  $C(x, \xi)$  can be made rapidly attenuating versus  $|x-\xi|$  by selecting a suitable value of the parameter  $c$ . This kernel is related to a 1<sup>st</sup> order markovian process (Vanmarcke, 1983) and is used extensively in geophysics and in earthquake engineering. Realizations of this process are considered on the interval  $[-a, +a]$ . The eigenfunctions and eigenvalues of the covariance function given by equation (14) are the solutions to the following integral equation

$$\sigma_s^2 \int_{-a}^{+a} e^{-c|x-\xi|} \phi(\xi) d\xi = \lambda \phi(x). \quad (15)$$

Equation (15) can be written as

$$\sigma_s^2 \int_{-a}^x e^{-c(x-\xi)} \phi(\xi) d\xi + \sigma_s^2 \int_x^a e^{c(x-\xi)} \phi(\xi) d\xi = \lambda \phi(x). \quad (16)$$

Differentiating equation (16) with respect to  $x$  and rearranging gives

$$\lambda \phi'(x) = -c \sigma_s^2 \int_{-a}^x e^{-c(x-\xi)} \phi(\xi) d\xi + c \sigma_s^2 \int_x^a e^{c(x-\xi)} \phi(\xi) d\xi. \quad (17)$$

Differentiating once more with respect to  $x$ , the following equation is obtained

$$\lambda \phi''(x) = (-2c \sigma_s^2 + c^2 \lambda) \phi(x). \quad (18)$$

Introducing the new variable

$$\omega^2 = \frac{2c \sigma_s^2 - c^2 \lambda}{\lambda}, \quad (19)$$

equation (18) becomes

$$\phi''(x) + \omega^2 \phi(x) = 0 \quad -a < x < +a. \quad (20)$$

To find the boundary conditions associated with the differential equation (20), equations (16) and (17) are evaluated at  $x = -a$  and  $x = +a$ . After rearrangement, the boundary conditions are

$$c \phi(a) + \phi'(a) = 0 \quad (21)$$

$$c \phi(-a) - \phi'(-a) = 0. \quad (22)$$

Thus, the integral equation given by equation (15) is transformed into the ordinary differential equation (20) with appended boundary conditions given by equations (21) and (22). It can be shown that  $\omega^2 > 0$  is the only range for  $\omega$  where equation (20) admits of solutions. In this case the solution is

$$\phi(x) = a_1 \cos(\omega x) + a_2 \sin(\omega x). \quad (23)$$

Further, applying the boundary conditions, equations (21) and (22), gives

$$\begin{cases} a_1 (c - \omega \tan(\omega a)) + a_2 (\omega + c \tan(\omega a)) = 0 \\ a_1 (c - \omega \tan(\omega a)) - a_2 (\omega + c \tan(\omega a)) = 0 \end{cases} \quad (24)$$

Nontrivial solutions exist only if the determinant of the homogeneous system in equation (24) is equal to zero. Setting this determinant equal to zero gives

$$\begin{cases} c - \omega \tan(\omega a) = 0 \\ \text{and} \\ \omega^* + c \tan(\omega^* a) = 0. \end{cases} \quad (25)$$

The resulting eigenfunctions are

$$\phi_n(x) = \frac{\cos(\omega_n x)}{\sqrt{a + \frac{\sin(2\omega_n a)}{2\omega_n}}} \quad (26)$$

$$\phi_n^*(x) = \frac{\sin(\omega_n^* x)}{\sqrt{a - \frac{\sin(2\omega_n^* a)}{2\omega_n^*}}}. \quad (27)$$

The corresponding eigenvalues are

$$\lambda_n = \frac{2c\sigma_s^2}{\omega_n^2 + c^2}. \quad (28)$$

and

$$\lambda_n^* = \frac{2c\sigma_s^2}{\omega_n^{*2} + c^2}, \quad (29)$$

where  $\omega_n$  and  $\omega_n^*$  are defined by equation (25). Thus, a process  $S(x)$  with covariance function given by equation(14) can be expanded as

$$S(x) = \sum_{n=0}^{\infty} \left[ b_n \sqrt{\lambda_n} \phi_n(x) + b_n^* \sqrt{\lambda_n^*} \phi_n^*(x) \right]. \quad (30)$$

### 3.2 Triangular Covariance

The second kernel to be considered is given by the equation

$$C(x, \xi) = \sigma_S^2 (1 - d|x - \xi|). \quad (31)$$

This kernel represents the triangular covariance function. It provides for linear decrease in correlation, which may be useful for applications in quality control problems. Here,  $\sigma_S$  represents the variance of the process and  $d$  is a parameter which can be used to adjust the distance  $|x - \xi|$  of null correlation between  $S(x)$  and  $S(\xi)$ . Consider realizations of this process on the interval  $[0, a]$ . The eigenfunctions and eigenvalues of  $C(x, \xi)$  are obtained as the solution to the integral equation

$$\sigma_S^2 \int_0^a \left[ 1 - c|x - \xi| \right] \phi(\xi) d\xi = \lambda \phi(x). \quad (32)$$

Differentiating equation (32) twice with respect to  $x$ , the following equivalent differential equation is obtained

$$\phi''(x) + \omega^2 \phi(x) = 0 \quad 0 < x < +a. \quad (33)$$

The associated boundary conditions are given by the equations

$$\phi'(a) = -\phi'(0) \quad \text{and} \quad (34)$$

$$\phi'(0) = \frac{\phi(0) + \phi(a)}{\frac{2}{d} - a}, \quad (35)$$

where

$$\omega = \sqrt{\frac{2d}{\lambda}}. \quad (36)$$

The solution of equation (33) subjected to the boundary conditions described by equations (34) and (35) is, for even  $n$ ,

$$\phi_n(x) = \frac{\cos(\omega_n x) + \tan\left(\frac{\omega_n a}{2}\right) \sin(\omega_n x)}{\sqrt{a + \frac{1}{2} \left( \tan^2\left(\frac{\omega_n a}{2}\right) \left( a - \frac{\sin(2\omega_n a)}{2\omega_n} \right) + \frac{1}{\omega} \sin^2(\omega_n a) \tan\left(\frac{\omega_n a}{2}\right) \right)}} \quad (37)$$

and, for odd  $n$ ,

$$\phi_n(x) = \frac{\cos(\omega_n x)}{\sqrt{\frac{a}{2} + \frac{\sin(2\omega_n a)}{4}}} \quad (38)$$

In equation (37),  $\omega_n$  is the solution to the transcendental equation

$$\tan\left(\frac{\omega_n a}{2}\right) = \frac{2}{\omega_n \left(\frac{2}{d} - a\right)}. \quad (39)$$

In equation (38),  $\omega_n$  is defined as,

$$\omega_n = m \frac{\pi}{a} \quad m = 1, 3, 5 \dots \quad (40)$$

Figures 3-1 and 3-2 show, for a typical value of the parameter  $c$ , plots of the exponentially decaying covariance function and of the 4-term approximation, respectively. Figures 3-3 and 3-4 show corresponding plots for the triangular covariance function, for a typical value of the parameter  $d$ .

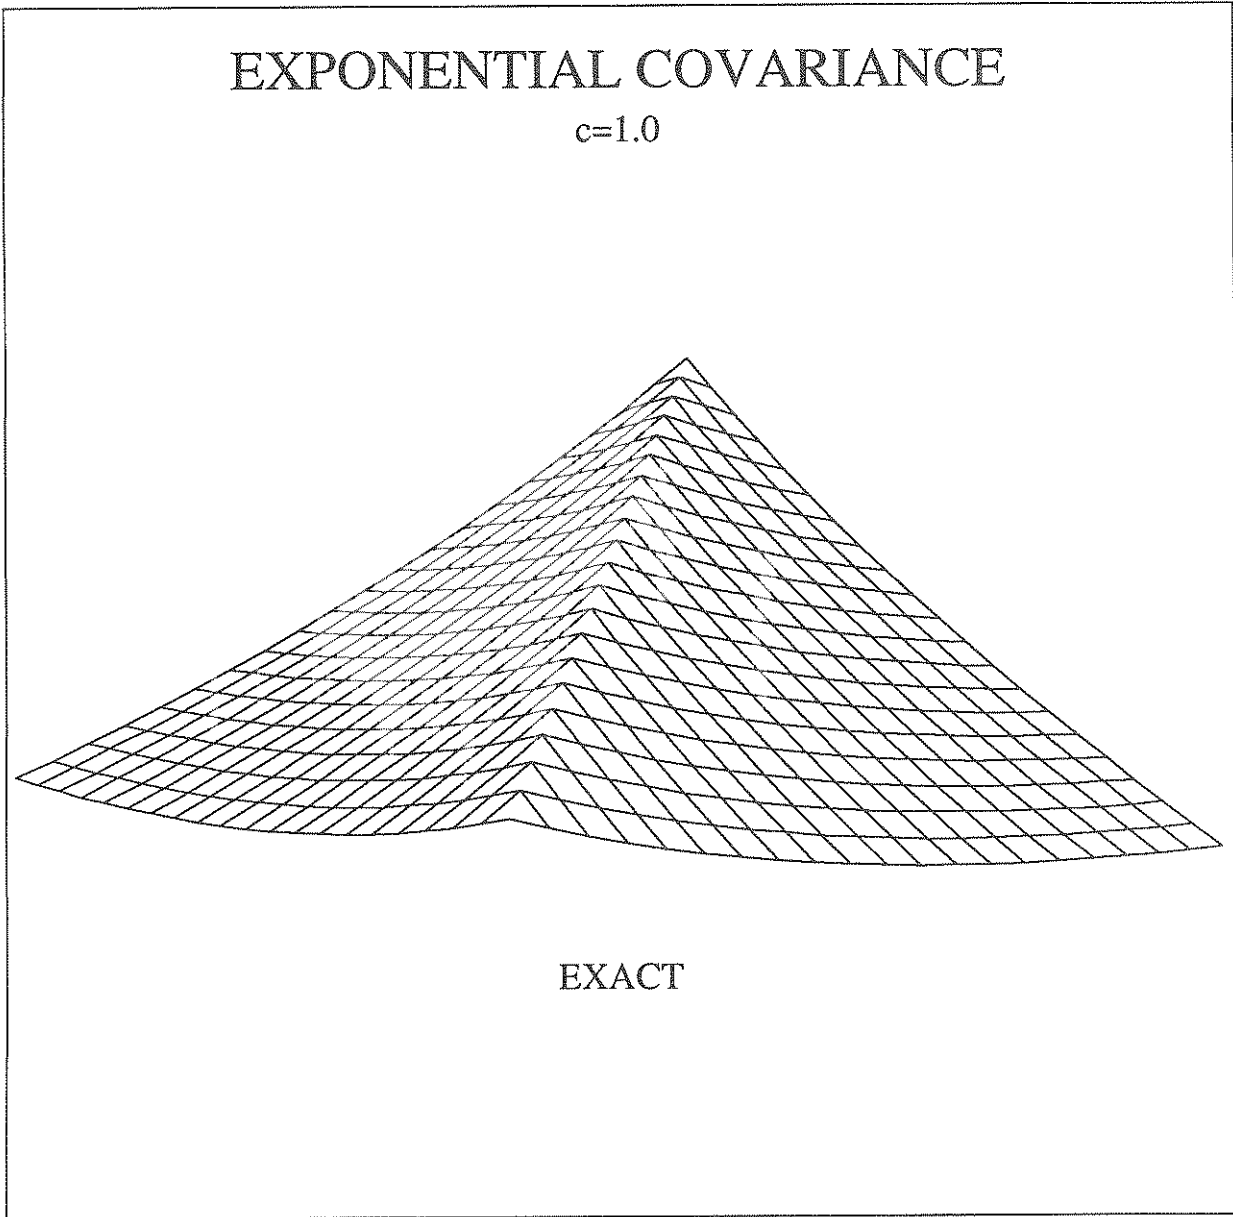


Fig. 3-1 Exact Exponential Covariance;  $c=1.0$ .


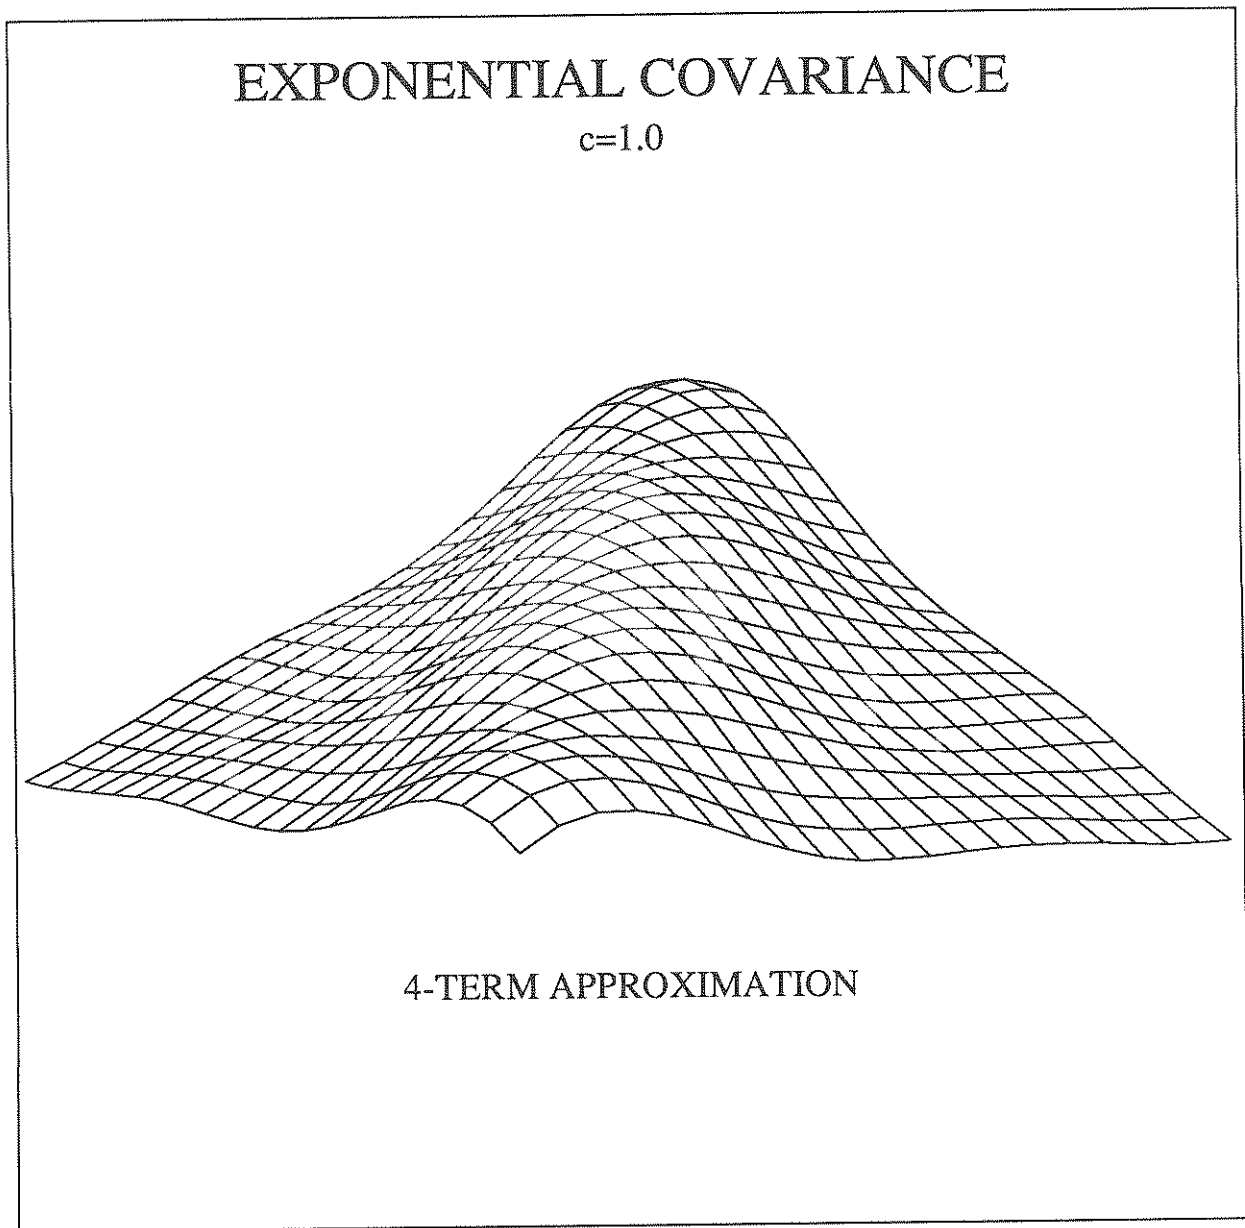


Fig. 3-2 Approximate Exponential Covariance;  $c=1.0$ ,  $r=4$ .

# TRIANGULAR COVARIANCE

$d=0.5$

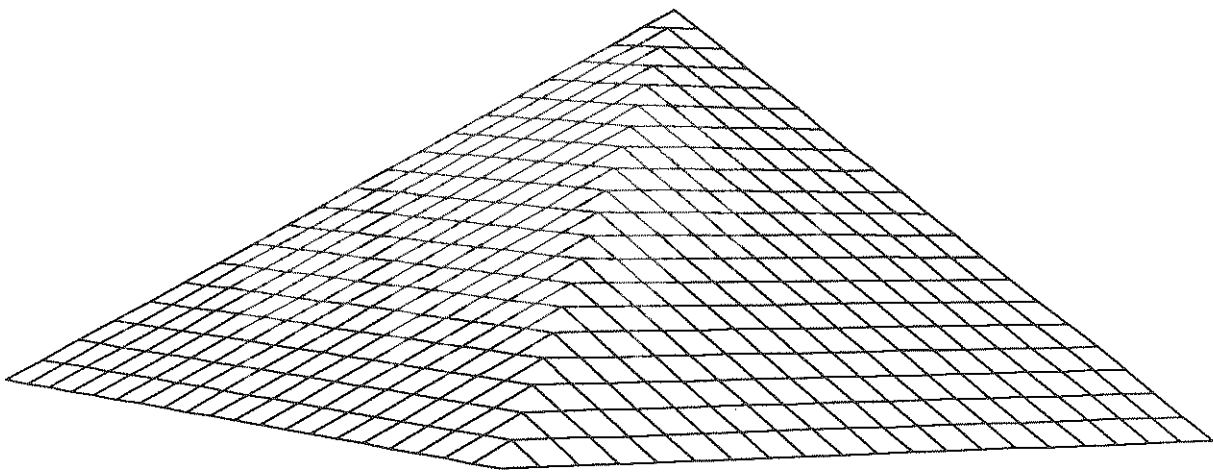


EXACT

Fig. 3-3 Exact Triangular Covariance;  $d=0.5$ .

# TRIANGULAR COVARIANCE

$d=0.5$

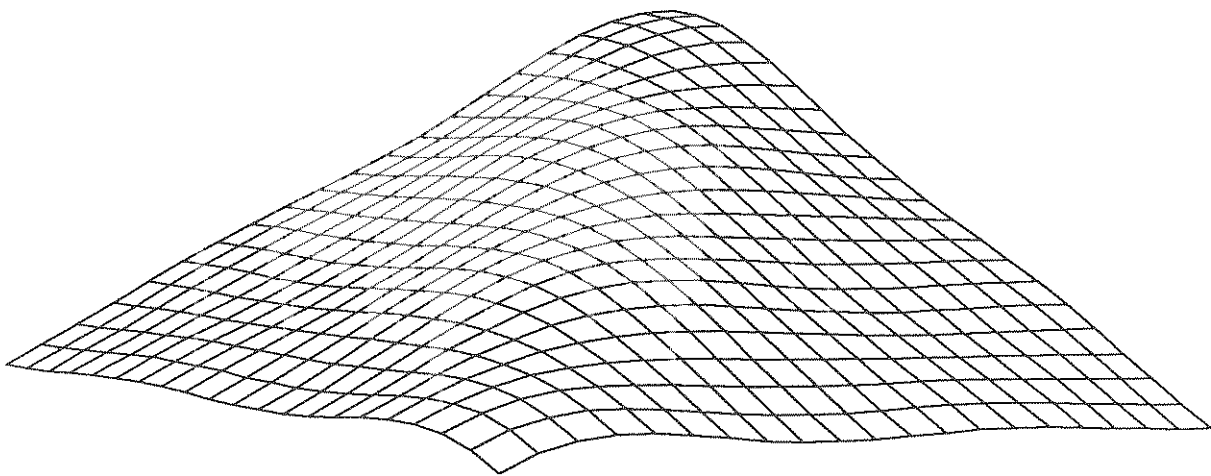

4-TERM APPROXIMATION

Fig. 3-4 Approximate Triangular Covariance;  $d=0.5$ ,  $r=4$ .



## SECTION 4

### FINITE ELEMENT FORMULATION

Let  $L$  be a domain in  $R$ , and let  $S(x)$ ,  $x \in L$ , be a property of this domain which will be considered to be a random process with mean  $\bar{S}(x)$  and covariance function  $C(x, \xi)$ . Let the domain  $L$  be subjected to a set of  $p$  external forces  $\{ P_i \}$ ,  $i=1, \dots, p$ . Following the standard energy formulation (Zienkiewicz, 1977), subdivide  $L$  into  $m$  finite elements each of length  $l^e$ . The strain energy stored in each of these elements can be represented in terms of the strain  $\epsilon^e$  and the stress  $\sigma^e$  of the element

$$\begin{aligned} V^e &= \frac{1}{2} \int_{l^e} \sigma^e \epsilon^e dD \\ &= \frac{1}{2} \left\{ u^e \right\}^T \int_{l^e} \left[ B^e(x) \right]^T \left[ D^e(x) \right] \left[ B^e(x) \right] dx \left\{ u^e \right\}, \end{aligned} \quad (41)$$

where  $\left\{ u^e \right\}$  is the vector of nodal displacements,  $\left[ B^e(x) \right]$  is the strain-displacement matrix, and  $\left[ D^e(x) \right]$  is the random matrix of material properties. It is assumed that  $\left[ D^e(x) \right]$  can be represented as  $S(x) \left[ P^e \right]$  where  $\left[ P^e \right]$  is a deterministic matrix.

Summing up the contributions from all elements, the total strain energy stored in the domain  $L$  becomes

$$V = \sum_{e=1}^m V^e = \frac{1}{2} \sum_{e=1}^m \left\{ u^e \right\}^T \int_{l^e} \left[ B^e(x) \right]^T \left[ S^e(x) \right] \left[ B^e(x) \right] dx \left\{ u^e \right\}. \quad (42)$$

Setting

$$\left[ K^e \right] = \int_{l^e} \left[ B^e(x) \right]^T \left[ S^e(x) \right] \left[ B^e(x) \right] dx \quad (43)$$

and expanding  $S(x)$  as in equation (13) gives

$$\left[ K^e \right] = \left[ \bar{K}^e \right] + \sum_{n=0}^r b_n \left[ K_n^e \right]. \quad (44)$$

In this equation,

$$\left[ K_n^e \right] = \lambda_n \int_{l^e} \phi_n(x) \left[ B^e(x) \right]^T \left[ P^e(x) \right] \left[ B^e(x) \right] dx \quad (45)$$

is the  $n^{\text{th}}$  consistent component of the random element stiffness and,

$$\left[ \bar{K}^e \right] = \int_{l^e} \left[ B^e(x) \right]^T \left[ \bar{S}(x) \right] \left[ B^e(x) \right] dx \quad (46)$$

is the consistent mean element stiffness. Substituting equations (43-46) into equation (42), the expression for the total strain energy becomes

$$V = \frac{1}{2} \sum_{n=0}^r b_n \sum_{e=1}^m \left\{ u^e \right\}^T \left[ K_n^e \right] \left\{ u^e \right\} + \frac{1}{2} \sum_{e=1}^m \left\{ u^e \right\}^T \left[ \bar{K}^e \right] \left\{ u^e \right\}. \quad (47)$$

The local displacements  $\left\{ u^e \right\}$  for each element are related to the global displacements  $\{ U \}$  of the whole system through the " bookkeeping " transformation

$$\left\{ u^e \right\} = \left[ C^e \right] \{ U \}, \quad (48)$$

where  $\left[ C^e \right]$  is a permutation matrix. Combining equation (48) and equation (47) yields

$$V = \frac{1}{2} \sum_{n=0}^r b_n \{ U \}^T \left[ K_n \right] \{ U \} + \frac{1}{2} \{ U \}^T \left[ \bar{K} \right] \{ U \}, \quad (49)$$

where

$$\left[ K_n \right] = \sum_{e=1}^m \left[ C^e \right]^T \left[ K_n^e \right] \left[ C^e \right] \quad (50)$$

is the  $n^{\text{th}}$  consistent global random stiffness, and

$$\left[ \bar{K} \right] = \sum_{e=1}^m \left[ C^e \right]^T \left[ \bar{K}^e \right] \left[ C^e \right]. \quad (51)$$

is the consistent global mean stiffness.

The  $p$  external forces applied to the domain can be grouped in a vector  $\{ P \}$ . The work performed by  $\{ P \}$  during the deformation of the domain is equal to

$$\Omega = \{ U \}^T \{ P \}. \quad (52)$$

Minimizing the total potential energy leads to

$$\frac{\partial \left[ V - \Omega \right]}{\partial \{ U \}} = 0. \quad (53)$$

Inserting in the above equation the expressions for  $V$  and  $\Omega$  from equations (49) and (52), respectively, results in

$$\left[ \bar{K} + \sum_{n=0}^r b_n \left[ K_n \right] \right] \{ U \} = \{ P \}. \quad (54)$$

At this stage, the boundary conditions can be imposed on each  $\left[ K_n \right]$  separately. The spatial variation of the randomness has been incorporated in the deterministic  $\left[ K_n \right]$  matrices. In equation (54), the random coefficient matrix has to be inverted to determine the response vector. That is,

$$\{ U \} = \left[ I + \sum_{n=0}^r b_n \left[ \bar{K} \right]^{-1} \left[ K_n \right] \right]^{-1} \left[ \bar{K} \right]^{-1} \{ P \}. \quad (55)$$

The first term on the right hand side of equation (55) can be expanded in a Neumann series leading to

$$\{ U \} = \sum_{k=0}^{\infty} \left[ - \sum_{n=0}^r b_n \left[ Q_n \right] \right]^k \left[ \bar{K} \right]^{-1} \{ P \}, \quad (56)$$

where

$$\left[ Q_n \right] = \left[ \bar{K} \right]^{-1} \left[ K_n \right]. \quad (57)$$

For gaussian material properties,  $\left\{ b_n \right\}$  forms a gaussian vector with independent, uncorrelated and jointly gaussian random variables. An important implication of the gaussian property of  $\{ b_n \}$  can be expressed by the equations ( Loeve, 1977 )

$$E \left[ b_1 \cdots b_{2m+1} \right] = 0 \quad (58)$$

$$E \left[ b_1 \cdots b_{2m} \right] = \sum \prod E \left[ b_i b_j \right] \quad (59)$$

In equation (59) the summation involves  $\frac{(2m)!}{(2^m m!)}$  terms corresponding to the different ways by which  $2m$  elements can be broken up into  $m$  pairs. This fact greatly simplifies the analysis. Assuming gaussian material property, for simplicity, and averaging both sides of equation (56) yields

$$E \left[ U \right] = \sum_{k=\text{even}} \left[ \sum_{n=0}^{\infty} b_n \left[ Q_n \right] \right]^k \left[ \bar{K} \right]^{-1} \{ P \} \quad (60)$$

To compute the correlation matrix of the response, multiply equation (56) by its transpose and average both sides. This procedure leads to

$$E \left[ U U^T \right] = \sum_{k=0}^{\infty} \sum_{l=0}^{\infty} E \left[ \left[ \sum_{n=0}^r b_n \left[ Q_n \right] \right]^l \left[ \bar{K} \right]^{-1} \{ P \} \{ P \}^T \left[ \bar{K} \right]^{-T} \left[ \sum_{m=0}^r b_m \left[ Q_m \right]^T \right]^k \right] \quad (61)$$

Clearly, this equation for the correlation matrix can be greatly simplified, if equations (58) and (59) are applicable.



## SECTION 5

### NUMERICAL EXAMPLE

The formulation presented in the previous sections is quite general in that it is applicable to any physical domain by simply using the corresponding stress-strain relations as indicated by the matrices  $\left[ B^e \right]$  and  $\left[ D^e \right]$ . Also, random loadings can be readily accommodated in the analysis as can be seen from equations (60) and (61). The method described in the preceding sections is exemplified by considering a one-dimensional problem. The problem involves a cantilever Euler-Bernoulli beam subjected to a deterministic uniform transverse static load, as shown in figure 5-1. It is assumed that the bending rigidity  $\bar{EI}$  of the beam, which involves the modulus of elasticity  $\bar{E}$  and the cross-sectional mass moment of inertia  $I$ , is a random process of the spatial variable  $x$ , as shown in fig. 5-1. It is assumed that the process  $\bar{EI}$  has a known mean value  $\langle \bar{EI} \rangle$  and a known covariance function  $C(x, \xi)$  reflecting two beam locations, at  $x$  and  $\xi$ . Two models for  $C(x, \xi)$  are considered. The first involves the exponential form which lends itself to the expansion defined by equations (26) through (30). The second involves the triangular form which lends itself to the expansion specified by the equations (37) through (40). Further, the beam under consideration is assumed, without loss of generality, to have unit length and unit mean bending rigidity; it is subjected to a unit uniform load. In implementing the preceding stochastic finite element method, the matrix  $\left[ B^e(x) \right]$  must be determined. In doing this task, linear interpolation of the strains is used over each element. The resulting equation is

$$\left[ B^e \right] = \left[ \begin{array}{cccc} 12\eta-6 & 1^e(6\eta-4) & 6-12\eta & 1^e(6\eta-2) \end{array} \right] \frac{1}{1e^2}, \quad (63)$$

where  $\eta$  represents the local coordinate over the element as shown in figure 5-1. This expression is then substituted into equation (45) to compute the matrices  $\left[ K_n^e \right]$ . Finally, equations (60) and (61), truncated at an appropriate number of terms, are used to calculate the mean and the standard deviation of the response of the beam at any given nodal point.

To assess the reliability of the proposed stochastic finite element method, a Monte Carlo simulation of the beam response is undertaken. Specifically, an auto-regressive (AR) digital filter of order 20 (twenty) is used to synthesise realizations of the bending rigidity of the beam along its span. Upon generating a bending rigidity profile of the beam, its response to the uniform load is determined by relying on a standard numerical quadrature algorithm. This procedure is repeated several times to produce an ensemble of beam deflections along its span. Then, statistical algorithms are utilized to extract from the ensemble the mean value and the standard deviation of the deflection at selected nodal points.

Figures 5-2 through 5-5 show the results for the standard deviation  $\sigma_T$  of the deflection of the tip of the beam versus various values of the standard deviation  $\sigma_{\bar{EI}}$  of the bending rigidity  $\bar{EI}$ . Also shown in these figures are the corresponding values of  $\sigma_T$  produced by a Monte Carlo study

involving 5000 (five thousand) realizations of the bending rigidity profile of the beam. Observe the excellent agreement between the theoretical and the simulated results as the number of terms in the orthogonal expansion reaches four ( $r=4$ ) and combined terms of order up to eight ( $k+l=8$ ) are maintained in the Neumann expansion. The same trend is observed in the results shown in figures 5-6 through 5-9 which pertain to the triangular covariance function. For both cases, the reliability of the proposed method is quite remarkable even for a beam with large  $\sigma_{EI}$ .

To reflect the computational efficiency of the proposed method, define the time required to solve the deterministic problem as a unit of "computing effort". Table 1 shows the computing effort required by the proposed method for the cases shown in the plots. Examining this table, it is seen that even for small scale problems like those described in the previous section, the proposed method is notably more efficient than the Monte-Carlo method. Note that in few cases of interest, analytical expressions for the eigenfunctions and eigenvalues of the covariance function, which are involved in the expansion of the process  $\Delta S(x)$ , are possible. In general, however, it is necessary to numerically find the eigenvalues and eigenfunctions of the covariance matrix associated with a particular problem. Once computed, the eigenfunctions can be stored either numerically or by using interpolation functions (Masri et al. 1982, 1986).

Table 1 Comparison of the Computation Time Required by the Proposed Method to that Required by the Monte Carlo Simulation Method.

Computational Units				
	k+l=2	k+l=4	k+l=6	k+l=8
r*=2	1.2	1.2	3.0	13.0
r=4	1.2	3.0	36.0	737.0
MCS**	5000			

(\*) r = number of terms in the orthogonal expansion

(\*\*) 5000 samples in the Monte-Carlo simulation.

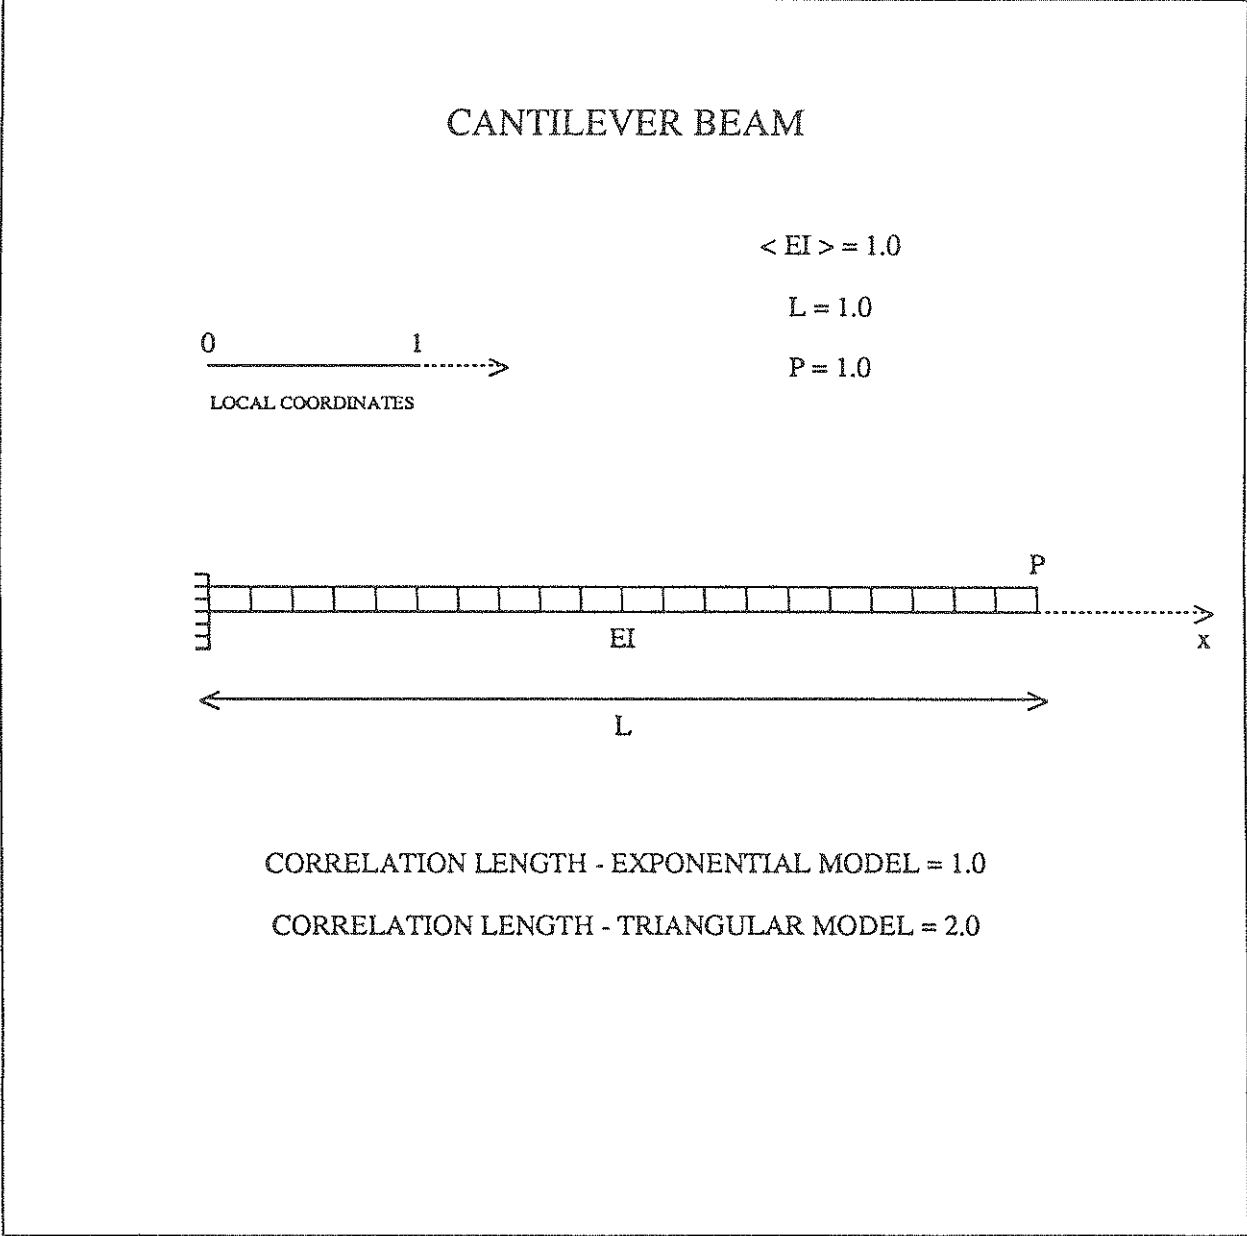


Fig. 5-1 Beam with Random Bending Rigidity under Uniform Load; Exponential and Triangular Covariance Models.



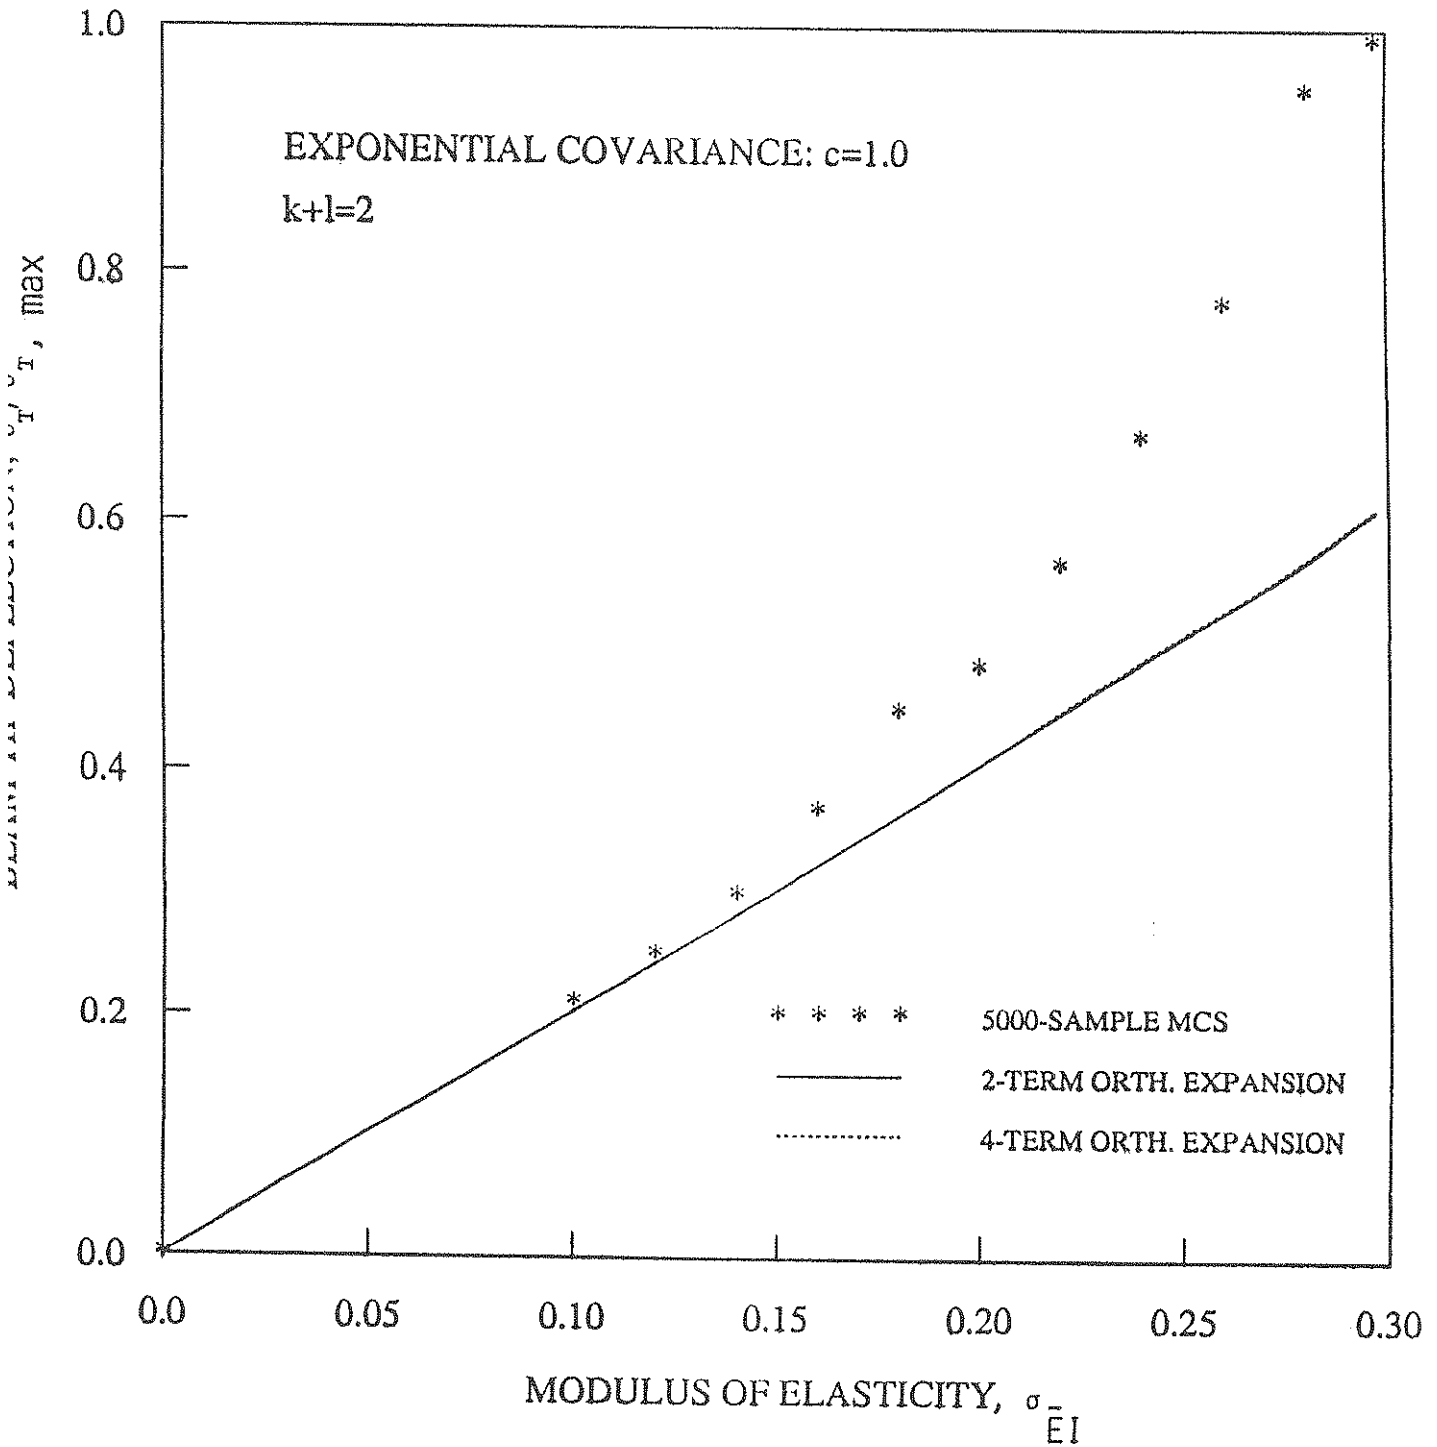


FIGURE 5-2 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance,  $k+1=2$

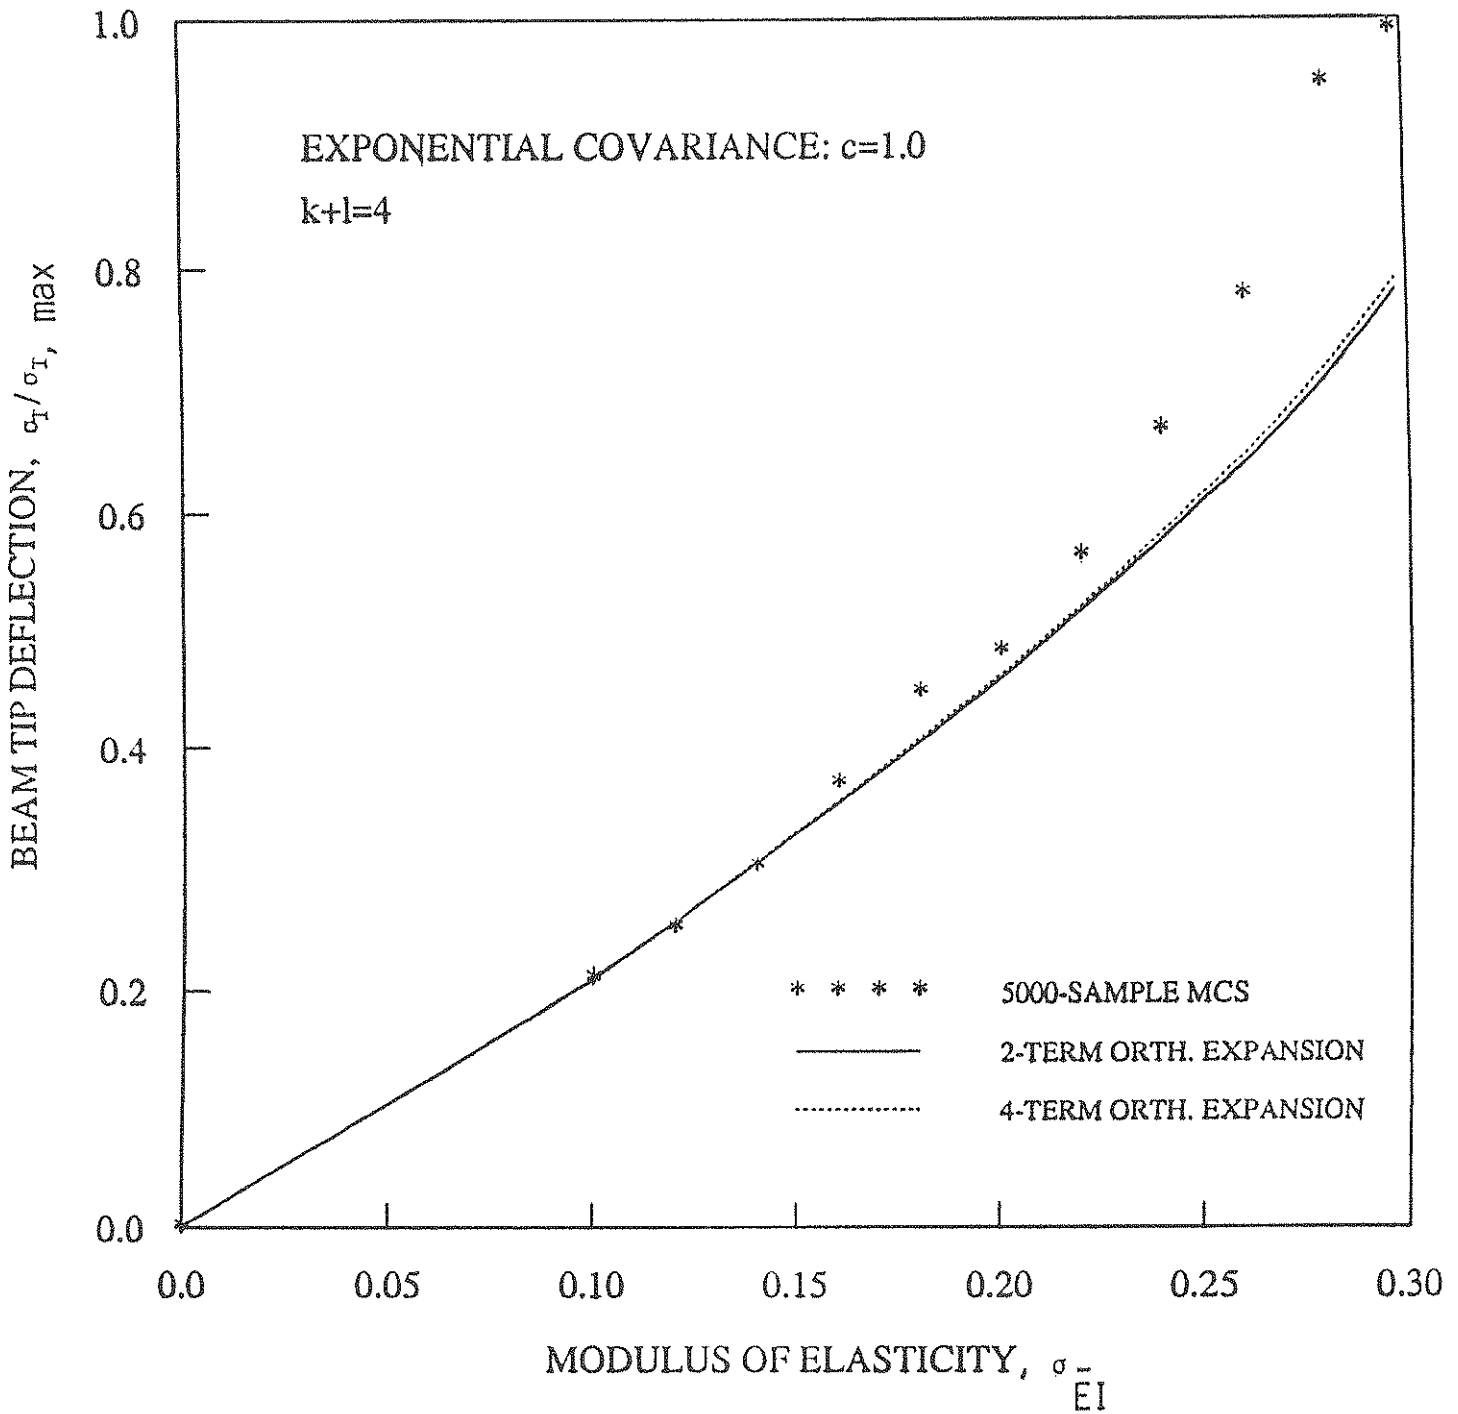


FIGURE 5-3 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance,  $k+l=4$

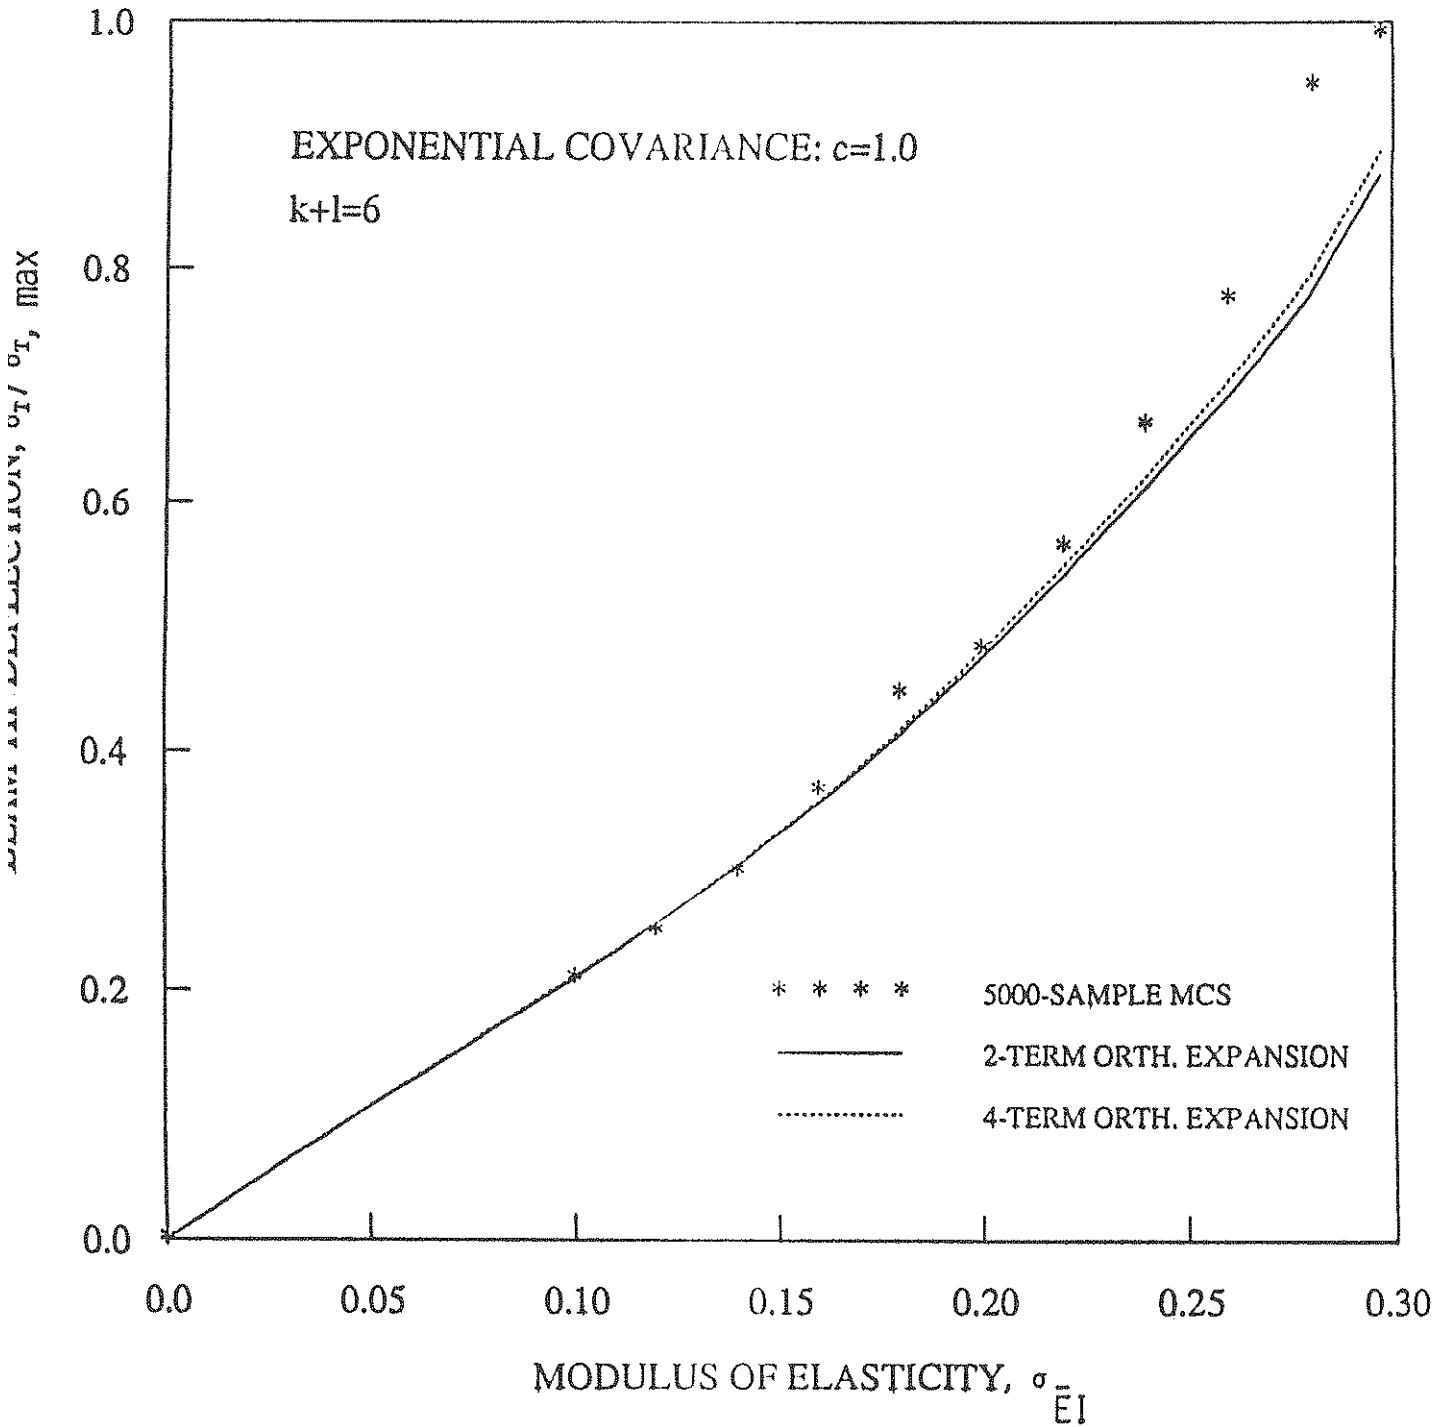


FIGURE 5-4 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance,  $k+1=6$

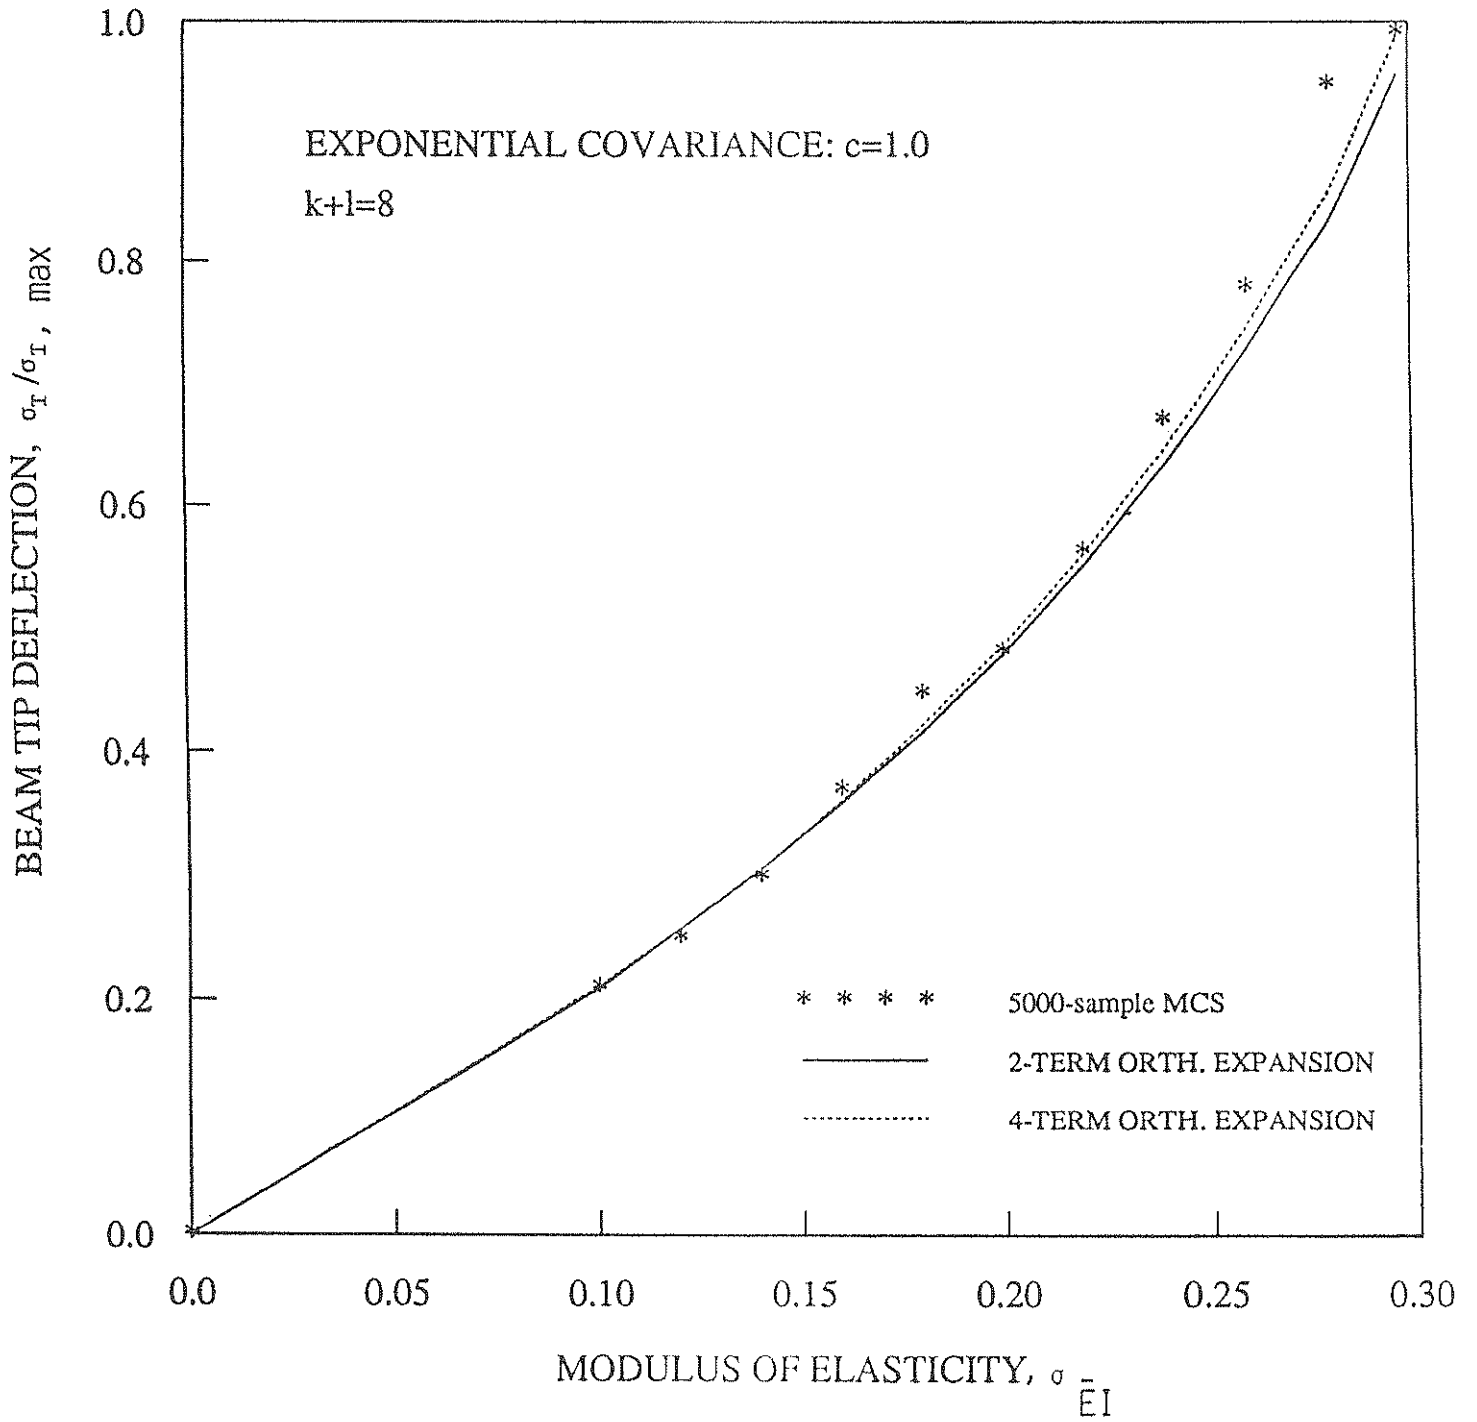


FIGURE 5-5 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Exponential Covariance,  $k+1=8$

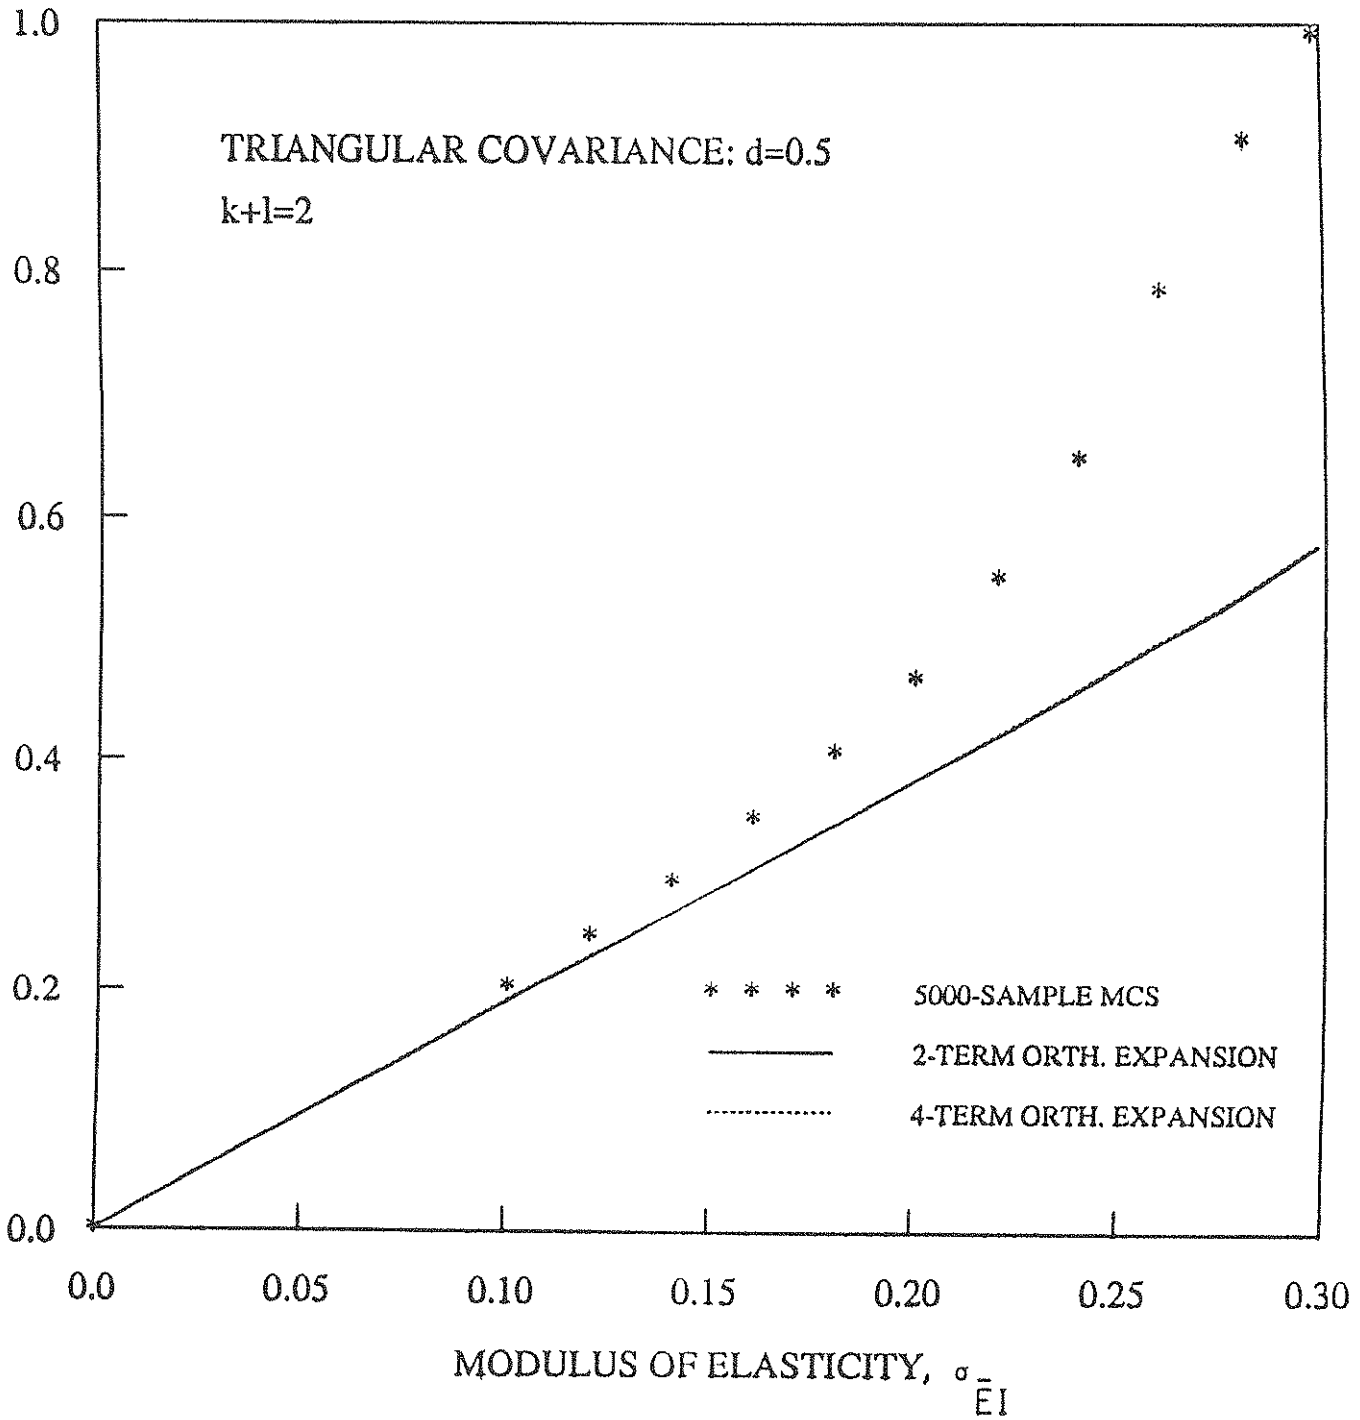


FIGURE 5-6 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance,  $k+1=2$

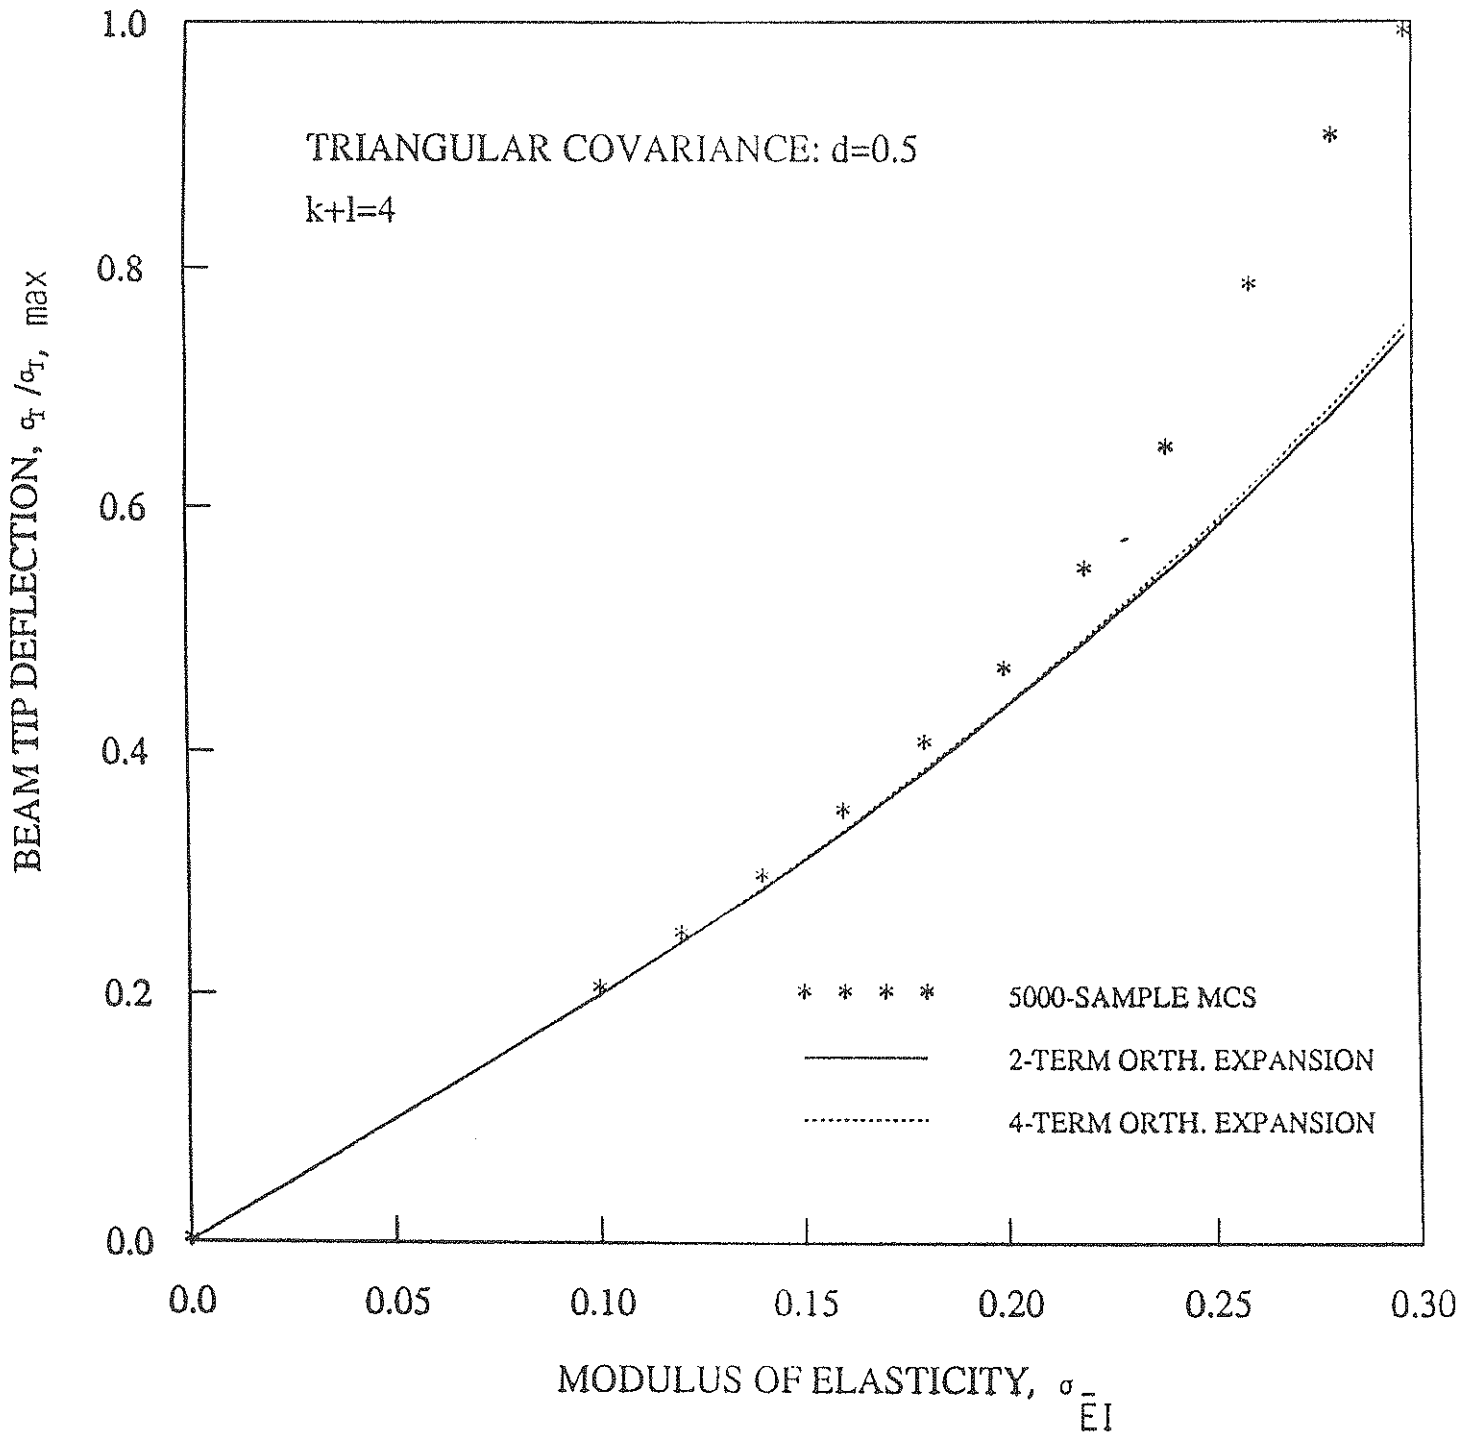


FIGURE 5-7 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance,  $k+l=4$

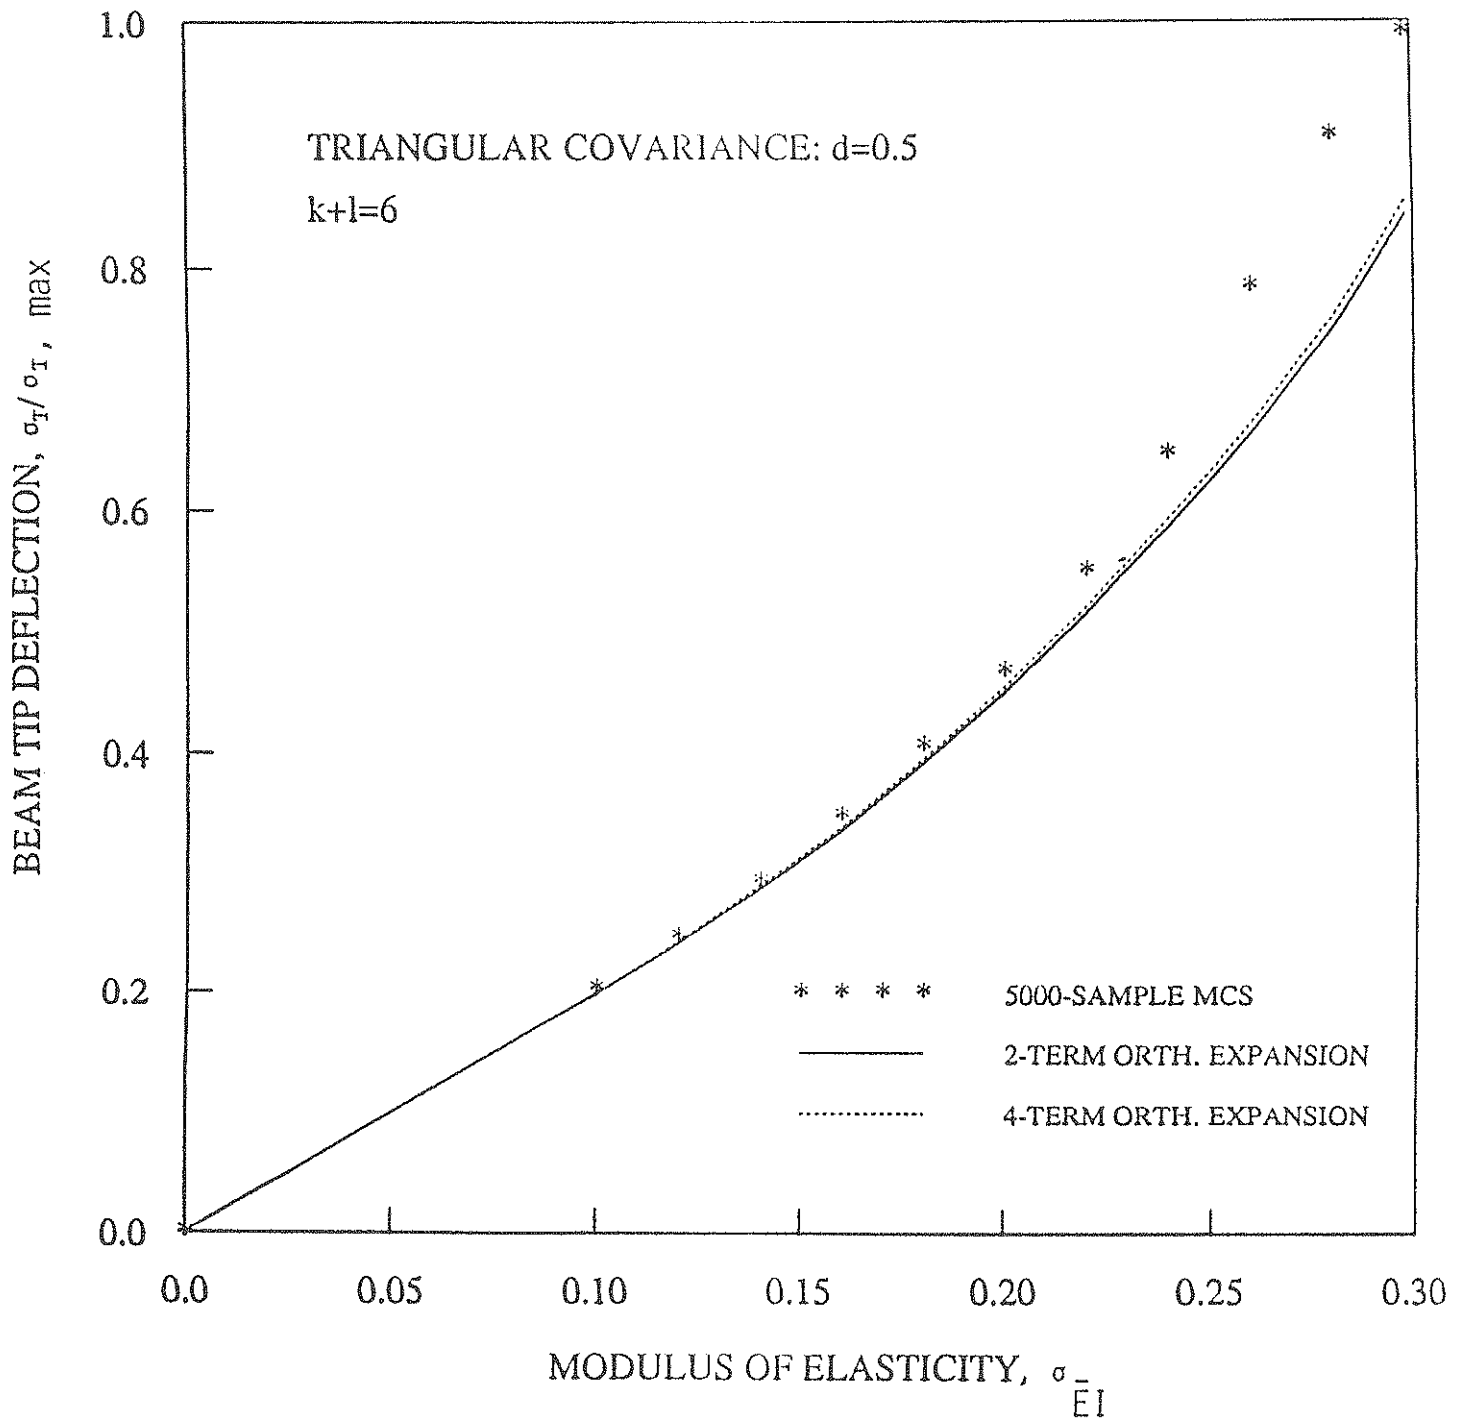


FIGURE 5-8 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance,  $k+l=6$

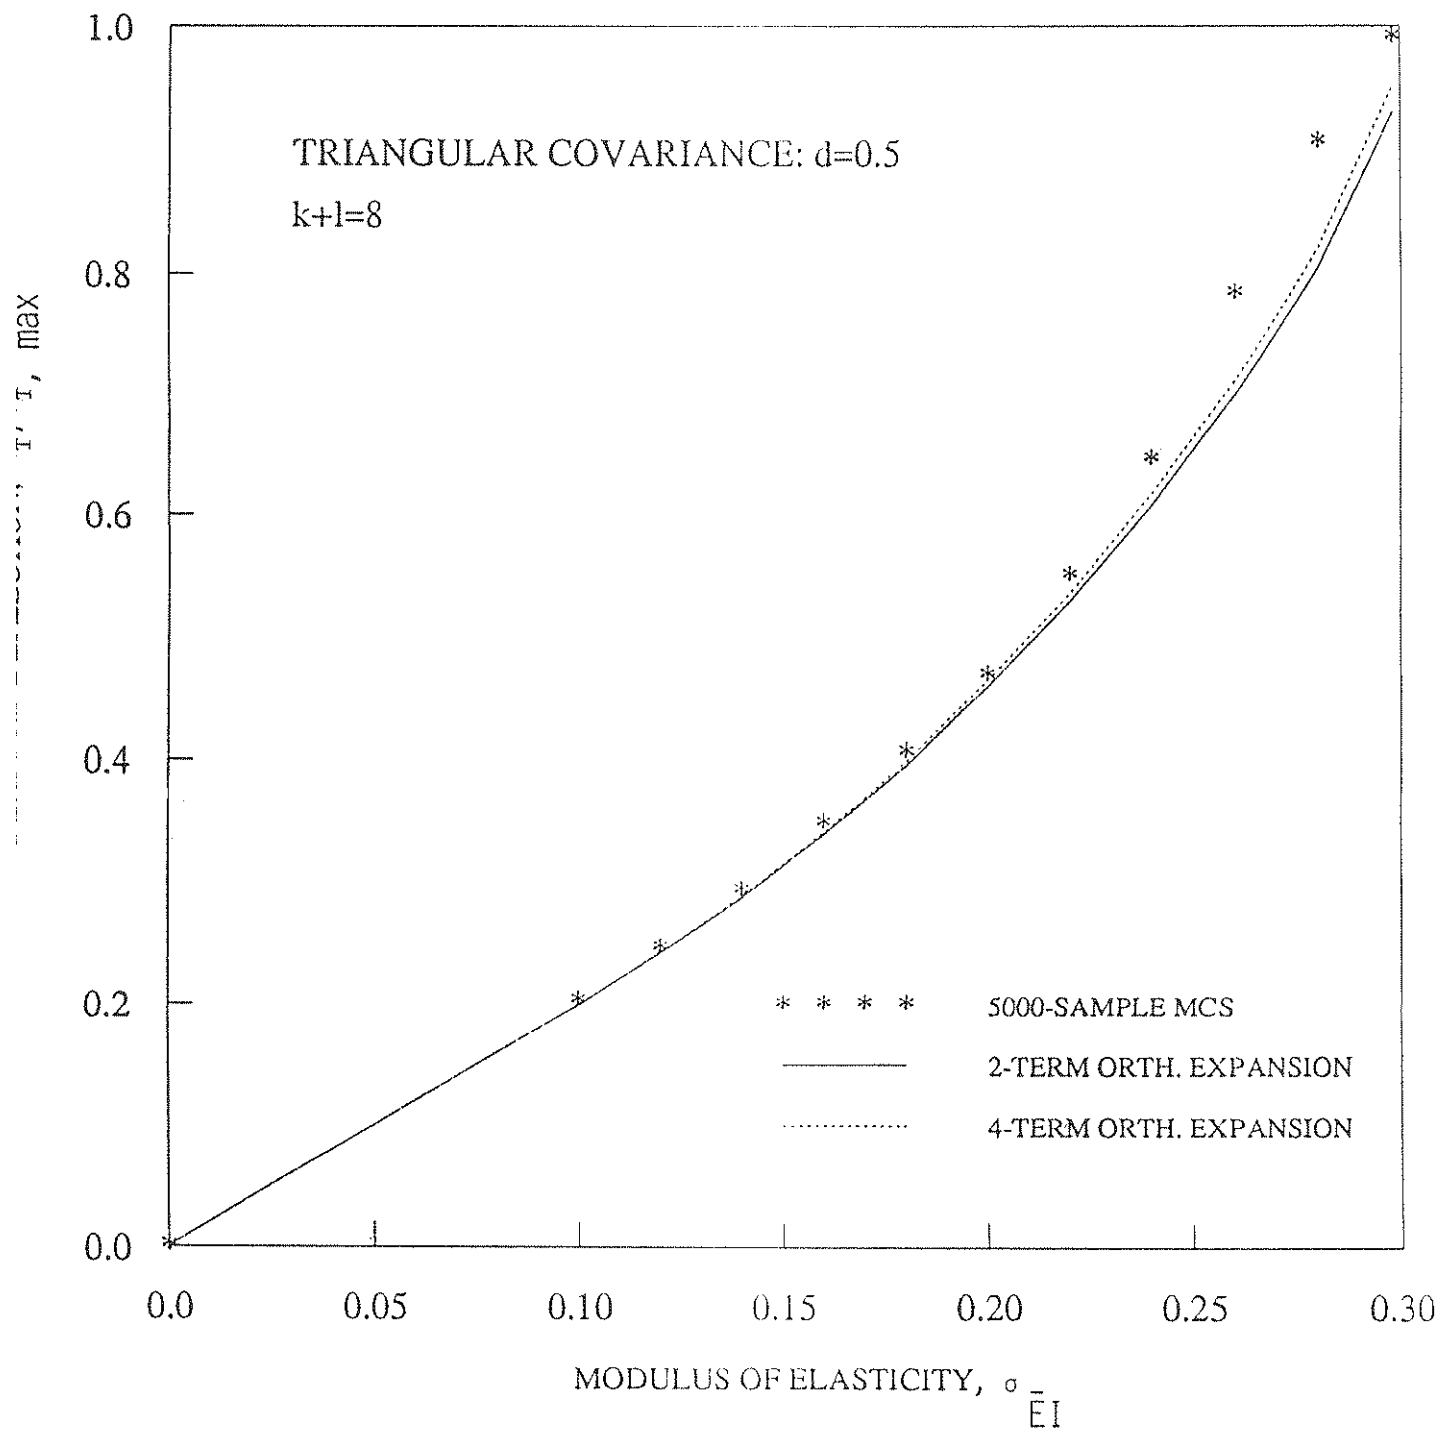


FIGURE 5-9 Beam Tip Deflection Normalized Standard Deviation versus Bending Rigidity Standard Deviation; Triangular Covariance,  $k+1=8$



## SECTION 6

### SUMMARY

A new method is proposed for a numerical treatment of problems involving random media. The method is based on the Karhunen-Loeve orthogonal expansion of a random process. The expansion consists of the projection of the process onto a space of orthogonal random variables. The method is incorporated into a consistent variational finite element formulation. It can be mechanised for computational efficiency. Further, it can be readily combined with any deterministic finite element code. To apply the method to a specific problem it is first required to determine, analytically or numerically, the eigenvalues and eigenvectors of the covariance function, which are then used in equation (45) to compute  $\left[ K_n^e \right]$ . The indicated integrations can be performed analytically for some special cases. For arbitrary problems, however, resorting to numerical quadrature is necessary. The elemental random stiffnesses are then assembled into the global random stiffnesses as indicated by equation (50). The mean elemental and global matrices given in equations (46) and (51) can be assembled using a standard finite element code. Equations (60) and (61) can be conveniently automated to compute the average and the covariance matrix of the response to any desired accuracy. An application to the problem of a random cantilever beam was investigated. The results were found to be in good agreement with a Monte-Carlo data bank simulation. Substantial superiority, in terms of the requisite computational time, of the new method over the Monte Carlo approach was noted. It is believed that the proposed method has a great potential for dealing with problems encountered in earthquake engineering where both the excitation and the properties of the medium can be modeled as random fields.



## SECTION 7

### REFERENCES

- [1]. Adomian G., *Stochastic Systems*. Academic Press, New York, 1984.
- [2]. Benaroya H. and Rehak M. "Parametric excitations I: Exponentially correlated parameters", *ASCE Journal of the Engineering Mechanics Division*, vol. 113, p. 861-874, June 1987.
- [3]. Burnside O.H., "Probabilistic structural analysis for the space propulsion system components", in *Advances in Aerospace Structural Analysis*, Proceedings ASME WAM, Miami Beach, Fl., p. 87-102, 1985, vol. AD-09.
- [4]. Collins J.D. and Thompson W.T., "The eigenvalue problem for structural systems with uncertain parameters", *AIAA Journal*, vol.7, no.4, p. 642-648, 1969.
- [5]. Devijver P.A. and Kittler J., *Pattern Recognition: A Statistical Approach*, Prentice Hall International Inc., Englewood Cliffs, NJ, 1982.
- [6]. Hart G.C. and Collins J.D., "The treatment of randomness in finite element modelling", SAE Shock and Vibrations symposium, Los Angeles, CA, p. 2509-2519, Oct. 1970.
- [7]. Loeve M., *Probability Theory*, 4<sup>th</sup> edition, Springer-Verlag, New York, 1977.
- [8]. Masri S.F. and Miller R.K., "Compact Probabilistic Representation of random processes", ASME, *Journal of Applied Mechanics*, vol. 49, p. 871-876, 1982.
- [9]. Mercer J. "Functions of positive and negative type and their connection with the theory of integral equations", *Phil. Tran. Roy. Soc. London, Series A*, vol.209, p. 415-446, 1909.
- [10]. Nakagiri S. and Hisada T., "Stochastic finite element method applied to structural analysis with uncertain parameters", *Proc. Int. Conference on the finite element method*, p. 206-211, Aug. 1982.
- [11]. Shinozuka M. and Leno E., "A probabilistic model for spatial distribution of material properties". *Eng. Fracture Mechanics*, vol.8, p. 217-227, 1976.
- [12]. Shinozuka M. *Stochastic Mechanics, vol. I*, Department of Civil Engineering, Columbia University, 1987.
- [13]. Shinozuka M. "Structural response variability", *ASCE Journal of the Engineering Mechanics Division*, vol. 113, no. EM6, pp.825-842.
- [14]. Traina M.I., Miller R.K. and Masri S.F., "Orthogonal decomposition and transmission of nonstationary random processes", *Probabilistic Engineering Mechanics*, vol.1, no.3, p. 136-149, Sept. 1986.
- [15]. Van Trees H.L. *Detection, Estimation and Modulation Theory, Part 1*, Wiley, New York 1968.
- [16]. Vanmarcke E. "Probabilistic modelling of soil profiles" *ASCE Journal of the Geotechnical Engineering Division*, vol.103, no. GT11, p. 1227-1246, 1977.

- [17]. Vanmarcke E. *Random Fields*. MIT Press, Cambridge Mass., 1983.
- [18]. Yamazaki F., Shinozuka M. and Dasgupta G., "Neumann expansion for stochastic finite element analysis", M2- Report, Department of Civil Engineering and Engineering Mechanics, Columbia University, New York, 1986.
- [19]. Zienkiewicz, *The Finite Element Method*, McGraw-Hill, London, New York, 1977.

## SECTION 8

### NOTATION

The following symbols are used in this report.

$b_n$  = orthogonal random variables.

$c$  = reciprocal of the correlation length of the random process -exponential model-.

$d$  = reciprocal of the correlation length of the random process -triangular model-.

$l^e$  = length of element  $e$ .

$m$  = number of finite element in the mesh.

$p$  = number of external loads applied to the beam.

$r$  = number of terms used in the orthogonal expansion.

$u^e$  = local displacement vector of element  $e$ .

$[B^e(x)]$  = strain-displacement matrix.

$[C^e]$  = permutation matrix for element  $e$ .

$[D^e(x)]$  = stress-strain matrix.

$\bar{E}$  = modulus of elasticity of the beam.

$E[.]$  = is the mathematical expectation operator.

$[K^e]$  = element stiffness matrix.

$[K]$  = global stiffness matrix.

$[K_n]$  =  $n^{\text{th}}$  consistent component of the random stiffness matrix.

$[\bar{K}^e]$  = element mean stiffness matrix.

$[\bar{K}]$  = global mean stiffness matrix.

$I$  = cross-section mass moment of inertia of the beam.

$L$  = Domain of definition of the process.

$[Q_n] = [\bar{K}]^{-1} [K_n]$ .

$S(x)$  = stochastic process.

$\bar{S}(x)$  = mathematical expectation of the process  $S$ .

$U$  = global displacement vector.

$V^e$  = strain energy in element  $e$ .

$V$  = total strain energy in the beam.

$\delta_{mn}$  = Kronecker delta.

$\varepsilon^e$  = strain over element e.

$\eta$  = local coordinate over a finite element.

$\lambda_n$  =  $n^{\text{th}}$  eigenvalue of  $C(x, \xi)$ .

$\phi_n(x)$  =  $n^{\text{th}}$  eigenvector of  $C(x, \xi)$ .

$\sigma^e$  = stress over element e.

$\sigma_S$  = standard deviation of the modulus of elasticity of the beam.

$\Delta S(x) = S(x) - \bar{S}(x)$ .

$\Omega$  = external work on the beam.

$[ \cdot ]^T$  = indicates matrix transposition.

$[ \cdot ]^{-1}$  = indicates matrix inversion.

**NATIONAL CENTER FOR EARTHQUAKE ENGINEERING RESEARCH  
LIST OF PUBLISHED TECHNICAL REPORTS**

The National Center for Earthquake Engineering Research (NCEER) publishes technical reports on a variety of subjects related to earthquake engineering written by authors funded through NCEER. These reports are available from both NCEER's Publications Department and the National Technical Information Service (NTIS). Requests for reports should be directed to the Publications Department, National Center for Earthquake Engineering Research, State University of New York at Buffalo, Red Jacket Quadrangle, Buffalo, New York 14261. Reports can also be requested through NTIS, 5285 Port Royal Road, Springfield, Virginia 22161. NTIS accession numbers are shown in parenthesis, if available.

- NCEER-87-0001 "First-Year Program in Research, Education and Technology Transfer," 3/5/87, (PB88-134275/AS).
- NCEER-87-0002 "Experimental Evaluation of Instantaneous Optimal Algorithms for Structural Control," by R.C. Lin, T.T. Soong and A.M. Reinhorn, 4/20/87, (PB88-134341/AS).
- NCEER-87-0003 "Experimentation Using the Earthquake Simulation Facilities at University at Buffalo," by A.M. Reinhorn and R.L. Ketter, to be published.
- NCEER-87-0004 "The System Characteristics and Performance of a Shaking Table," by J.S. Hwang, K.C. Chang and G.C. Lee, 6/1/87, (PB88-134259/AS).
- NCEER-87-0005 "A Finite Element Formulation for Nonlinear Viscoplastic Material Using a Q Model," by O. Gyebe and G. Dasgupta.
- NCEER-87-0006 "SMP - Algebraic Codes for Two and Three Dimensional Finite Element Formulations," by X. Lee and G. Dasgupta, to be published.
- NCEER-87-0007 "Instantaneous Optimal Control Laws for Tall Buildings Under Seismic Excitations," by J.N. Yang, A. Akbarpour and P. Ghaemmaghami, 6/10/87, (PB88-134333/AS).
- NCEER-87-0008 "IDARC: Inelastic Damage Analysis of Reinforced Concrete-Frame Shear-Wall Structures," by Y.J. Park, A.M. Reinhorn and S.K. Kunnath, 7/20/87, (PB88-134325/AS).
- NCEER-87-0009 "Liquefaction Potential for New York State: A Preliminary Report on Sites in Manhattan and Buffalo," by M. Budhu, V. Vijayakumar, R.F. Giese and L. Baumgras, 8/31/87, (PB88-163704/AS).
- NCEER-87-0010 "Vertical and Torsional Vibration of Foundations in Inhomogeneous Media," by A.S. Veletsos and K.W. Dotson, 6/1/87, (PB88-134291/AS).
- NCEER-87-0011 "Seismic Probabilistic Risk Assessment and Seismic Margin Studies for Nuclear Power Plants," by Howard H.M. Hwang, 6/15/87, (PB88-134267/AS).
- NCEER-87-0012 "Parametric Studies of Frequency Response of Secondary Systems Under Ground-Acceleration Excitations," by Y. Yong and Y.K. Lin, 6/10/87, (PB88-134309/AS).
- NCEER-87-0013 "Frequency Response of Secondary Systems Under Seismic Excitations," by J.A. HoLung, J. Cai and Y.K. Lin, 7/31/87, (PB88-134317/AS).
- NCEER-87-0014 "Modelling Earthquake Ground Motions in Seismically Active Regions Using Parametric Time Series Methods," G.W. Ellis and A.S. Cakmak, 8/25/87, (PB88-134283/AS).
- NCEER-87-0015 "Detection and Assessment of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 8/25/87, (PB88-163712/AS).
- NCEER-87-0016 "Pipeline Experiment at Parkfield, California," by J. Isenberg and E. Richardson, 9/15/87, (PB88-163720/AS).
- NCEER-87-0017 "Digital Simulations of Seismic Ground Motion," by M. Shinozuka, G. Deodatis and T. Harada, 8/31/87, (PB88-155197/AS).


- NCEER-87-0018 "Practical Considerations for Structural Control: System Uncertainty, System Time Delay and Truncation of Small Forces," J. Yang and A. Akbarpour, 8/10/87, (PB88-163738/AS).
- NCEER-87-0019 "Modal Analysis of Nonclassically Damped Structural Systems Using Canonical Transformation," by J.N. Yang, S. Sarkani and F.X. Long, 9/27/87.
- NCEER-87-0020 "A Nonstationary Solution in Random Vibration Theory," by J.R. Red-Horse and P.D. Spanos, 11/3/87, (PB88-163746/AS).
- NCEER-87-0021 "Horizontal Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by A.S. Veletsos and K.W. Dotson, 10/15/87, (PB88-150859/AS).
- NCEER-87-0022 "Seismic Damage Assessment of Reinforced Concrete Members," by Y.S. Chung, C. Meyer and M. Shinozuka, 10/9/87, (PB88-150867/AS).
- NCEER-87-0023 "Active Structural Control in Civil Engineering," by T.T. Soong, 11/11/87.
- NCEER-87-0024 "Vertical and Torsional Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by K.W. Dotson and A.S. Veletsos, 12/87.
- NCEER-87-0025 "Proceedings from the Symposium on Seismic Hazards, Ground Motions, Soil-Liquefaction and Engineering Practice in Eastern North America, October 20-22, 1987, edited by K.H. Jacob, 12/87.
- NCEER-87-0026 "Report on the Whittier-Narrows, California, Earthquake of October 1, 1987," by J. Pantelic and A. Reinhorn, 11/87.
- NCEER-87-0027 "Design of a Modular Program for Transient Nonlinear Analysis of Large 3-D Building Structures," by S. Srivastav and J.F. Abel, 12/30/87.
- NCEER-88-0001 "Workshop on Seismic Computer Analysis and Design With Interactive Graphics," by J.F. Abel and C.H. Conley, 1/18/88.
- NCEER-88-0002 "Optimal Control of Nonlinear Structures," J.N. Yang, F.X. Long and D. Wong, 1/22/88.
- NCEER-88-0003 "Substructuring Techniques in the Time Domain for Primary-Secondary Structural Systems," by G. D. Manolis and G. Juhn, 2/10/88, to be published.
- NCEER-88-0004 "Iterative Seismic Analysis of Primary-Secondary Systems," by A. Singhai, L.D. Lutes and P. Spanos, 2/23/88.
- NCEER-88-0005 "Stochastic Finite Element Expansion for Random Media," P. D. Spanos and R. Ghanem, 3/14/88, to be published.
- NCEER-88-0006 "Combining Structural Optimization and Structural Control," F. Y. Cheng and C. P. Pantelides, 1/10/88, to be published.











National Center for Earthquake Engineering Research  
State University of New York at Buffalo