

NATIONAL CENTER FOR EARTHQUAKE
ENGINEERING RESEARCH

State University of New York at Buffalo

INSTANTANEOUS OPTIMAL CONTROL WITH
ACCELERATION AND VELOCITY FEEDBACK

by

J. N. Yang and Z. Li

Department of Civil, Mechanical and Environmental Engineering
The George Washington University
Washington, D.C. 20052

Technical Report NCEER-90-0016


June 29, 1990

This research was conducted at The George Washington University and was partially supported by the National Science Foundation under Grant No. ECE 86-07591.

NOTICE

This report was prepared by The George Washington University as a result of research sponsored by the National Center for Earthquake Engineering Research (NCEER) and the National Science Foundation. Neither NCEER, associates of NCEER, its sponsors, The George Washington University, nor any person acting on their behalf:

- a. makes any warranty, express or implied, with respect to the use of any information, apparatus, method, or process disclosed in this report or that such use may not infringe upon privately owned rights; or
- b. assumes any liabilities of whatsoever kind with respect to the use of, or the damage resulting from the use of, any information, apparatus, method or process disclosed in this report.



**INSTANTANEOUS OPTIMAL CONTROL WITH
ACCELERATION AND VELOCITY FEEDBACK**

by

J.N. Yang¹ and Z. Li²

June 29, 1990

Technical Report NCEER-90-0016

NCEER Project Number 89-2202 and NSF Grant Number BCS-89-04524

NSF Master Contract Number ECE 86-07591

- 1 Professor, Department of Civil, Mechanical and Environmental Engineering, George Washington University
- 2 Research Associate, Department of Civil, Mechanical and Environmental Engineering, George Washington University

NATIONAL CENTER FOR EARTHQUAKE ENGINEERING RESEARCH
State University of New York at Buffalo
Red Jacket Quadrangle, Buffalo, NY 14261

PREFACE


The National Center for Earthquake Engineering Research (NCEER) is devoted to the expansion and dissemination of knowledge about earthquakes, the improvement of earthquake-resistant design, and the implementation of seismic hazard mitigation procedures to minimize loss of lives and property. The emphasis is on structures and lifelines that are found in zones of moderate to high seismicity throughout the United States.

NCEER's research is being carried out in an integrated and coordinated manner following a structured program. The current research program comprises four main areas:

- Existing and New Structures
- Secondary and Protective Systems
- Lifeline Systems
- Disaster Research and Planning

This technical report pertains to Program 2, Secondary and Protective Systems, and more specifically, to protective systems. Protective Systems are devices or systems which, when incorporated into a structure, help to improve the structure's ability to withstand seismic or other environmental loads. These systems can be passive, such as base isolators or viscoelastic dampers; or active, such as active tendons or active mass dampers; or combined passive-active systems.

In the area of active systems, research has progressed from the conceptual phase to the implementation phase with emphasis on experimental verification. As the accompanying figure shows, the experimental verification process began with a small single-degree-of-freedom structure model, moving to larger and more complex models, and finally, to full-scale models.

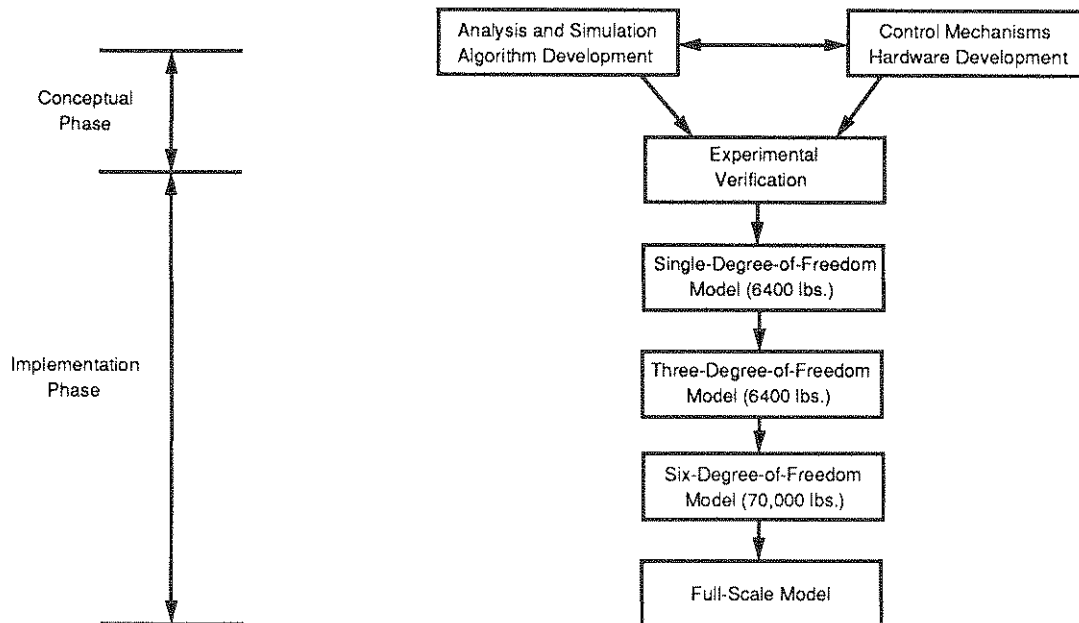

At NCEER, research and development of active control technology have reached the stage of full-scale implementation. In this report, the authors consider one of the practical issues in control algorithm design. Since displacement measurements are not easily accessible due to a lack of an absolute reference, a control law involving only velocity and acceleration measurements is developed. Simulation results show that the performance of the proposed control law compares favorably with those of other available optimal control laws.

ABSTRACT

In the experimental demonstration of aseismic control systems, difficulties were encountered in the measurement of the displacement response of the structure. During earthquake ground motions, both the building and the ground are moving so that there is no absolute reference for the determination of the displacement response. An optimal control theory is proposed herein, which utilizes the measurements of acceleration and velocity responses rather than the displacement and velocity measurements. Such an optimal control law is developed based on the instantaneous optimal control theories, and it is evaluated and compared with other available optimal control laws. Numerical results indicate that the performance of the proposed optimal control law is as good as that of other optimal control laws currently available. However, the contribution of such an optimal control law to the practical implementation of active control systems for seismic hazard mitigations may be quite significant.

ACKNOWLEDGMENT

This research effort is partially supported by the National Center for Earthquake Engineering Research Grant No. NCEER-89-2202 and National Science Foundation Grant No. NSF-BCS-89-04524.

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1	Introduction	1-1
2	Formulation	2-1
3	Stochastic Earthquake Response	3-1
4	Numerical Demonstrations	4-1
5	Conclusion	5-1
6	References	6-1
Appendix:	Optimal Control Law	A-1

LIST OF FIGURES

FIGURE	TITLE	PAGE
2-1	Structural Model With An Active Tendon Control System: (a) Single Bay; (b) Two Bays	2-2
4-1	32% El Centro Earthquake Ground Acceleration	4-3
4-2	Root-Mean-Square of Top Floor Relative Displacement With Respect To The Ground: Curve 0 (Without Control); Curve 1 ($\alpha = 2.8 \times 10^3$); Curve 2 ($\alpha = 2 \times 10^4$)	4-9
4-3	Root-Mean-Square of Active Control Force; Curve 1 ($\alpha = 2.8 \times 10^3$); Curve 2 ($\alpha = 2 \times 10^4$)	4-10

LIST OF TABLES

TABLE	TITLE	PAGE
4-I	Maximum Response Quantities of Building: (A) Without Control; (B) Classical Optimal Linear Control, Eq. (2.11); (C) Instantaneous Optimal Control, Eq. (2.10); and (D) Instantaneous Optimal Control With Feedback $\dot{\underline{Z}}(t)$, Eq. (2.8)	4-4
4-II	Maximum Root Mean Square of Structural Response And Control Force: (A) Without Control; (B) Classical Optimal Linear Control, Eq. (2.11); (C) Instantaneous Optimal Control, Eq. (2.10); and (D) Instantaneous Optimal Control With Feedback $\dot{\underline{Z}}(t)$, Eq. (2.8)	4-7

SECTION 1
INTRODUCTION

Recent experimental demonstrations for the application of aseismic control systems to scaled building structures [e.g., 1-7] indicate some difficulties involved in the measurement of floor displacements. The main reason is that during earthquake ground motions, both the building and the ground are moving so that there is no absolute reference for the determination of the floor displacement. This is particularly critical for practical implementations of active control systems to full-scale buildings for earthquake hazard mitigations. Laboratory experiments [1-7] further indicate that the floor displacement response obtained by numerically integrating the velocity measurement differs significantly from the actual floor displacement due to (i) noise pollutions and (ii) error accumulations resulting from numerical integrations.

Unfortunately, available optimal control theories [e.g., 8-10, 12-18] require measurements of displacement and velocity responses of the building structure. Although the instantaneous optimal open-loop control law proposed by Yang, et al. [9-10] does not require the measurements of the state vector of the structure, it is more vulnerable to a system time delay [11,17] and system uncertainties [11,16]. Since the measurements of acceleration and velocity of the structural response are much easier without involving an absolute reference, it is highly desirable to use acceleration and velocity sensors rather than displacement sensors.

The purpose of this paper is to present an optimal control law utilizing the

acceleration measurements rather than the displacement measurements. This optimal control law is developed based on the instantaneous optimal control theories developed by Yang, et al. [9-10, 12-13]. For a building structure subjected to an earthquake, the performance of the proposed optimal control law is evaluated and demonstrated by comparing numerically with other available optimal control laws using both deterministic and stochastic earthquake excitations.

SECTION 2
FORMULATION

Consider a shear-beam type building structure implemented by an active control system, such as an active mass damper or an active tendon system as shown in Fig. 2-1. The structure is idealized by an n degrees of freedom linear system and subjected to a one-dimensional earthquake ground acceleration $\ddot{X}_0(t)$. The matrix equation of motion can be expressed as

$$\dot{\underline{Z}}(t) = \underline{A} \underline{Z}(t) + \underline{B} \underline{U}(t) + \underline{W}_1 \ddot{X}_0(t) \quad (2.1)$$

in which an under bar denotes a vector or matrix. In Eq. (2.1), $\underline{Z}(t)$ = a 2n state vector, $\underline{U}(t)$ = a r-dimensional control vector, \underline{A} = a (2nx2n) system matrix, representing the structural characteristics of the building, \underline{B} = a (2nxr) location matrix specifying the location of r controllers and \underline{W}_1 is an appropriate 2n vector denoting the effect of the earthquake ground acceleration $\ddot{X}_0(t)$. The state vector $\underline{Z}(t)$ consists of the displacement vector $\underline{Y}(t)$ and velocity vector $\dot{\underline{Y}}(t)$, all relative to the ground, as

$$\underline{Z}(t) = \begin{bmatrix} \underline{Y}(t) \\ \dot{\underline{Y}}(t) \end{bmatrix} \quad (2.2)$$

with the initial condition $\underline{Z}(0) = 0$.

Following the concept of instantaneous optimal control proposed by Yang, et al. [8-9], we define a time-dependent quadratic performance index

$$J^*(t) = \dot{\underline{Z}}'(t) \underline{Q}^* \dot{\underline{Z}}(t) + \underline{U}'(t) \underline{R} \underline{U}(t) \quad (2.3)$$

in which a prime denotes the transpose of a vector or matrix. In Eq. (2.3),

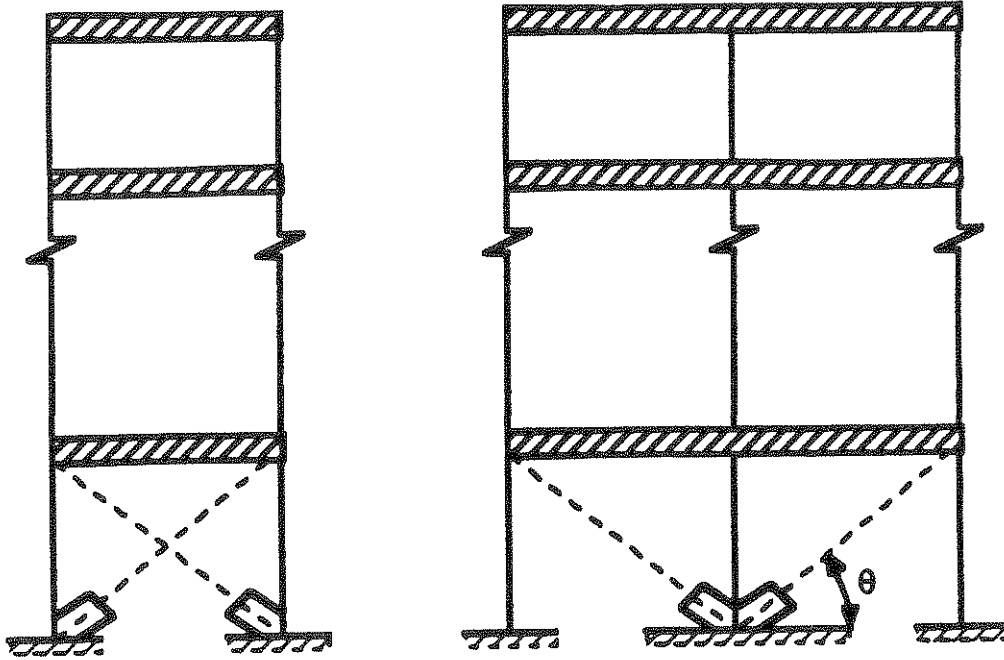


Figure 2-1: Structural Model With An Active Tendon Control System:
(a) Single Bay; (b) Two Bays.

\underline{Q}^* is a (2nx2n) positive semi-definite weighting matrix and \underline{R} is a (rxr) positive definite weighting matrix.

In order to minimize the performance index given by Eq. (2.3), the state vector, $\underline{Z}(t)$, in the equation of motion, Eq. (2.1), will be expressed in terms of the finite difference as follows

$$\underline{Z}(t) = \underline{Z}(t-\Delta t) + \Delta t \dot{\underline{Z}}(t-\Delta t) \quad (2.4)$$

Substituting Eq. (2.4) into Eq. (2.1), one obtains the equation of motion in the following form

$$\dot{\underline{Z}}(t) = \underline{A} \underline{Z}(t-\Delta t) + \underline{A} \Delta t \dot{\underline{Z}}(t-\Delta t) + \underline{B} \underline{U}(t) + \underline{W}_1 \ddot{\underline{X}}_0(t) \quad (2.5)$$

The Hamiltonian $H(t)$ is obtained from Eqs. (2.3) and (2.5) as

$$H(t) = \dot{\underline{Z}}'(t) \underline{Q}^* \dot{\underline{Z}}(t) + \underline{U}'(t) \underline{R} \underline{U}(t) + \underline{\lambda}' \left[\begin{array}{l} \dot{\underline{Z}}(t) - \underline{A} \underline{Z}(t-\Delta t) \\ - \underline{A} \dot{\underline{Z}}(t-\Delta t) \Delta t - \underline{B} \underline{U}(t) - \underline{W}_1 \ddot{\underline{X}}_0(t) \end{array} \right] \quad (2.6)$$

where $\underline{\lambda}$ is a Lagrangian multiplier vector.

The necessary conditions for the minimization of the performance index $J^*(t)$ subjected to the constraint given by Eq. (2.5) are as follows

$$\frac{\partial H(t)}{\partial \dot{\underline{Z}}} = 0, \quad \frac{\partial H(t)}{\partial \underline{U}} = 0, \quad \frac{\partial H(t)}{\partial \underline{\lambda}} = 0 \quad (2.7)$$

The optimal control vector $\underline{U}(t)$ can be obtained by substituting Eq. (2.6) into Eq. (2.7). Depending on the way the control vector is regulated, one

obtains optimal closed-loop control (feedback), optimal open-loop control (feedforward) and optimal closed-open-loop control (feedforward and feedback) as presented in the Appendix. It is mentioned, however, that the performance of the three optimal control laws derived in the Appendix is identical. For simplicity, the optimal closed-loop control vector $\underline{U}(t)$ is given in the following [see the Appendix]

$$\underline{U}(t) = - \underline{R}^{-1} \underline{B}' \underline{Q}^* \underline{\dot{Z}}(t) \quad (2.8)$$

Thus, the control vector $\underline{U}(t)$ depends on the feedback vector, $\underline{\dot{Z}}(t)$, that consists of the velocity and acceleration responses,

$$\underline{\dot{Z}}(t) = \begin{bmatrix} \underline{\dot{Y}}(t) \\ \underline{\ddot{Y}}(t) \end{bmatrix} \quad (2.9)$$

Consequently, the measurement of the displacement response $\underline{Y}(t)$ is replaced by the measurement of the acceleration response $\underline{\ddot{Y}}(t)$.

It is mentioned that the implication of minimizing the performance index, $J^*(t)$, given by Eq. (2.3) is that the quadratic function, involving the velocity response, acceleration response and control forces, is minimized at every time instant t for all $0 \leq t \leq t_f$, where t_f is longer than the duration of the earthquake. Although the displacement response $\underline{Y}(t)$ does not appear in the performance index $J^*(t)$, Eq. (2.3), it is expected that a minimization of $J^*(t)$ will also reduce $\underline{Y}(t)$.

Based on the instantaneous optimal closed-loop control law proposed in Refs. 9 and 10, the optimal control vector is given by

$$\underline{U}(t) = - \frac{\Delta t}{2} \underline{R}^{-1} \underline{B}' \underline{Q} \underline{Z}(t) \quad (2.10)$$

in which \underline{Q} is a $(2n \times 2n)$ positive semi-definite weighting matrix.

The optimal control vector $\underline{U}(t)$ based on the linear quadratic optimal control law is as follows [e.g., 8, 14]

$$\underline{U}(t) = - \frac{1}{2} \underline{R}^{-1} \underline{B}' \underline{P} \underline{Z}(t) \quad (2.11)$$

where \underline{P} is a $(2n \times 2n)$ Riccati matrix.

Finally, the matrix equation of motion for a structure implemented by an active control system is obtained by substituting Eq. (2.8) into Eq. (2.1) as

$$\left(\underline{I} + \underline{B} \underline{R}^{-1} \underline{B}' \underline{Q}^* \right) \dot{\underline{Z}}(t) = \underline{A} \underline{Z}(t) + \underline{W}_1 \underline{X}_0(t) \quad (2.12)$$

in which \underline{I} is a $(2n \times 2n)$ identity matrix.

Further, substitution of Eq. (2.10) or (2.11) into Eq. (2.1) leads to the following matrix equation of motion

$$\dot{\underline{Z}}(t) = \left(\underline{A} + \underline{B} \underline{G} \right) \underline{Z}(t) + \underline{W}_1 \underline{X}_0(t) \quad (2.13)$$

in which $\underline{G} = -0.5 \underline{R}^{-1} \underline{B}' \underline{P}$ for linear quadratic optimal control and $\underline{G} = -0.5 \Delta t \underline{R}^{-1} \underline{B}' \underline{Q}$ for instantaneous optimal control.

In what follows, the performance of the three optimal control laws given by Eqs. (2.8), (2.10) and (2.11) will be compared using a 6-story full-scale building implemented by an active tendon control system, Fig. 2-1(b), and subjected to earthquake ground accelerations.

SECTION 3
STOCHASTIC EARTHQUAKE RESPONSE

The controlled structural response can be solved numerically using Eq. (2.12) or (2.13), if the time history of an earthquake ground acceleration $\ddot{X}_0(t)$ is given. The earthquake ground acceleration $\ddot{X}_0(t)$, however, varies from occurrence to occurrence and it can be characterized more appropriately by a random process. Hence, the performance of the new optimal control law will be evaluated not only using an earthquake sample time history, such as the El Centro earthquake, but also considering $\ddot{X}_0(t)$ as a random process.

The earthquake ground acceleration, $\ddot{X}_0(t)$, is modeled as a filtered shot noise. In other words, $\ddot{X}_0(t)$ is the output of a filter due to a shot noise excitation,

$$\ddot{X}_g(t) = \psi(t) \eta(t) \quad (3.1)$$

in which $\psi(t)$ is a deterministic non-negative envelope function, and $\eta(t)$ is a stationary white noise with zero mean and a power spectral density S^2 . Various types of envelope functions $\psi(t)$ have been used in the literature. A particular envelope function given in the following will be used: $\psi(t) = 0$ for $t < 0$, $\psi(t) = (t/t_1)^2$ for $0 \leq t \leq t_1$, $\psi(t) = 1$ for $t_1 \leq t \leq t_2$ and $\psi(t) = \exp[-c(t-t_2)]$ for $t > t_2$, where t_1 , t_2 and c are parameters which should be selected appropriately to reflect the shape and the duration of the earthquake ground acceleration.

The frequency response function of the filter, denoted by $H_f(\omega)$, is given by

$$H_f(\omega) = \frac{1 + 2\zeta_g (\omega/\omega_g) \underline{i}}{\left[1 - (\omega/\omega_g)^2\right] + 2\zeta_g (\omega/\omega_g) \underline{i}} \quad (3.2)$$

in which $\underline{i} = (-1)^{1/2}$ and ζ_g and ω_g are parameters depending on the characteristics of the earthquake at a particular location.

Since the earthquake ground acceleration $\ddot{X}_0(t)$ has a zero mean, the mean values of the response state vector $\underline{Z}(t)$ and the active control vector $\underline{U}(t)$ are zero. The mean square values of $\underline{Z}(t)$ and $\underline{U}(t)$ are identical to the variances $\underline{\sigma}_z^2(t)$ and $\underline{\sigma}_u^2(t)$, respectively.

Let $\underline{H}_z(\omega)$ and $\underline{H}_u(\omega)$ be the frequency response vectors of $\underline{Z}(t)$ and $\underline{U}(t)$ due to a unit steady state ground acceleration, i.e., $\ddot{X}_0(t) = \exp[i\omega t]$, $\underline{Z}(t) = \underline{H}_z(\omega) \exp[i\omega t]$ and $\underline{U}(t) = \underline{H}_u(\omega) \exp[i\omega t]$. The frequency response vectors, $\underline{H}_z(\omega)$ and $\underline{H}_u(\omega)$, for a controlled structure can be obtained easily from Eq. (2.12) or (2.13).

The impulse response vectors, $\underline{h}_z^*(t)$ and $\underline{h}_u^*(t)$, of $\underline{Z}(t)$ and $\underline{U}(t)$, respectively, due to the shot noise input $\ddot{X}_g(t) = \delta(t)$ are related to the frequency response vectors through the Fourier transform pair

$$\underline{h}_z^*(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} H_f(\omega) \underline{H}_z(\omega) e^{i\omega t} d\omega \quad ; \quad \underline{h}_u^*(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} H_f(\omega) \underline{H}_u(\omega) e^{i\omega t} d\omega \quad (3.3)$$

in which $H_f(\omega)$ is given by Eq. (3.2)

The mean square response of the state vector $\underline{Z}(t)$ can be obtained easily as follows [e.g., 9].

$$\underline{\sigma}_z^2(t) = \int_{-\infty}^{\infty} |\underline{M}_z(t, \omega)|^2 S^2 d\omega \quad (3.4)$$

in which $|\underline{M}_z(t, \omega)|^2$ is a vector whose jth element is equal to the square of the absolute value of the jth element of $\underline{M}_z(t, \omega)$ given by Eq. (3.5),

$$\underline{M}_z(t, \omega) = \int_0^t \underline{h}_z^*(\tau) \psi(t-\tau) e^{-i\omega\tau} d\tau \quad (3.5)$$

In a similar manner, the mean square vector of the active control force can be obtained as

$$\underline{\sigma}_u^2(t) = \int_{-\infty}^{\infty} |\underline{M}_u(t, \omega)|^2 S^2 d\omega \quad (3.6)$$

in which

$$\underline{M}_u(t, \omega) = \int_0^t \underline{h}_u^*(\tau) \psi(t-\tau) e^{-i\omega\tau} d\tau \quad (3.7)$$

The numerical computation of the non-stationary root mean square vectors, $\underline{\sigma}_z(t)$ and $\underline{\sigma}_u(t)$, of $\underline{Z}(t)$ and $\underline{U}(t)$ can be carried out very efficiently by repeated applications of the Fast Fourier Transform (FFT) in the following manner: (i) The impulse response vectors $\underline{h}_z^*(t)$ and $\underline{h}_u^*(t)$ due to $\ddot{\underline{X}}_g(t) = \delta(t)$ are computed from the corresponding frequency response vectors $H_f(\omega)$ $\underline{H}_z(\omega)$ and $H_f(\omega)\underline{H}_u(\omega)$ using the FFT technique, Eq. (3.3); (ii) $\underline{M}_z(t, \omega)$ and $\underline{M}_u(t, \omega)$ are computed from Eqs. (3.5) and (3.7) again using the FFT technique; and (iii) The root mean square vectors $\underline{\sigma}_z(t)$ and $\underline{\sigma}_u(t)$ are evaluated by numerically integrating Eqs. (3.4) and (3.6) and taking the square root.

SECTION 4
NUMERICAL DEMONSTRATION

The performance of the proposed optimal control law will be demonstrated using two examples; one with the El Centro earthquake ground excitation and the other with a stochastic earthquake ground acceleration. The controlled structural response and the required active control force will be compared with those obtained using both the linear quadratic optimal control law and the instantaneous optimal control law.

A six-story full-scale building has been constructed recently in Japan by Takenaka Company in order to conduct field demonstrations of an active tendon control system and an active mass damper. The properties of the building have been provided by NCEER as follows. The (6x6) mass matrix is a diagonal matrix with each diagonal element being equal to 571.4 slugs. The (6x6) stiffness matrix K and damping matrix C are given in the following

$$\underline{K} = \begin{bmatrix} 325.56 & -159.41 & 39.14 & -6.28 & 0.92 & -0.08 \\ -159.38 & 195.81 & -111.51 & 25.32 & -3.57 & 0.41 \\ 39.14 & -111.50 & 149.94 & -82.93 & 16.34 & -1.71 \\ -6.23 & 25.31 & -82.92 & 113.13 & -59.44 & 8.68 \\ 0.94 & -3.59 & 16.35 & -59.44 & 80.65 & -34.66 \\ -0.04 & 0.39 & -1.70 & 8.67 & -34.66 & 27.33 \end{bmatrix} 10^4 \text{ lb/in.}$$

$$\underline{C} = \begin{bmatrix} 822.97 & -257.50 & 21.63 & -6.43 & -1.02 & -1.01 \\ -257.45 & 572.34 & -231.38 & 8.18 & -8.04 & -3.29 \\ 21.65 & -231.37 & 498.08 & -201.29 & -0.31 & -9.43 \\ -6.33 & 8.18 & -201.27 & 432.21 & -171.18 & -9.70 \\ -0.96 & -8.07 & -0.31 & -171.18 & 367.47 & -141.15 \\ -0.91 & 3.31 & -9.41 & -9.72 & -141.15 & 205.76 \end{bmatrix} \text{ lb. sec./in.}$$

With the mass, stiffness and damping matrices above, the natural frequencies of the building are computed as 0.943, 2.765, 4.876, 7.279, 10.114 and 14.423 Hz. The damping ratio for each vibrational mode is 1%. This six-story building has two bays and an active tendon controller is installed on the first floor as shown in Fig. 2-1(b) where the angle of inclination θ for tendons is 51.5 degrees.

The El Centro earthquake ground acceleration scaled by a factor of 32% is shown in Fig. 4-1. This 32% El Centro earthquake is considered as the input excitation. Without any control system, the maximum interstory deformation x_i^* ($i = 1, 2, \dots, 6$) of each story unit, the maximum total acceleration of each floor \ddot{y}_i^* ($i = 1, 2, \dots, 6$) and the maximum relative displacement y_6^* of the top floor with respect to the ground are shown in Column A of Table 4-I.

With the active tendon control system, the controlled building response and the required active control force depend on the particular control law. In the present example with only one tendon controller, the \underline{R} matrix consists of one element, denoted by R . For demonstrative purposes, $R = 1$ is used. For linear quadratic optimal control, the (12x12) weighting matrix \underline{Q} is considered as a diagonal matrix in which every diagonal element is identical to q . The Riccati matrix \underline{P} is computed for $q = 3 \times 10^7$ and 2×10^9 , respectively. Then, the maximum structural response quantities and the maximum active control force U_{\max} are computed and shown in Column B of Table 4-I.

With the application of the instantaneous optimal control law, the weighting matrix $0.5\Delta t \underline{Q}$ is partitioned as follows

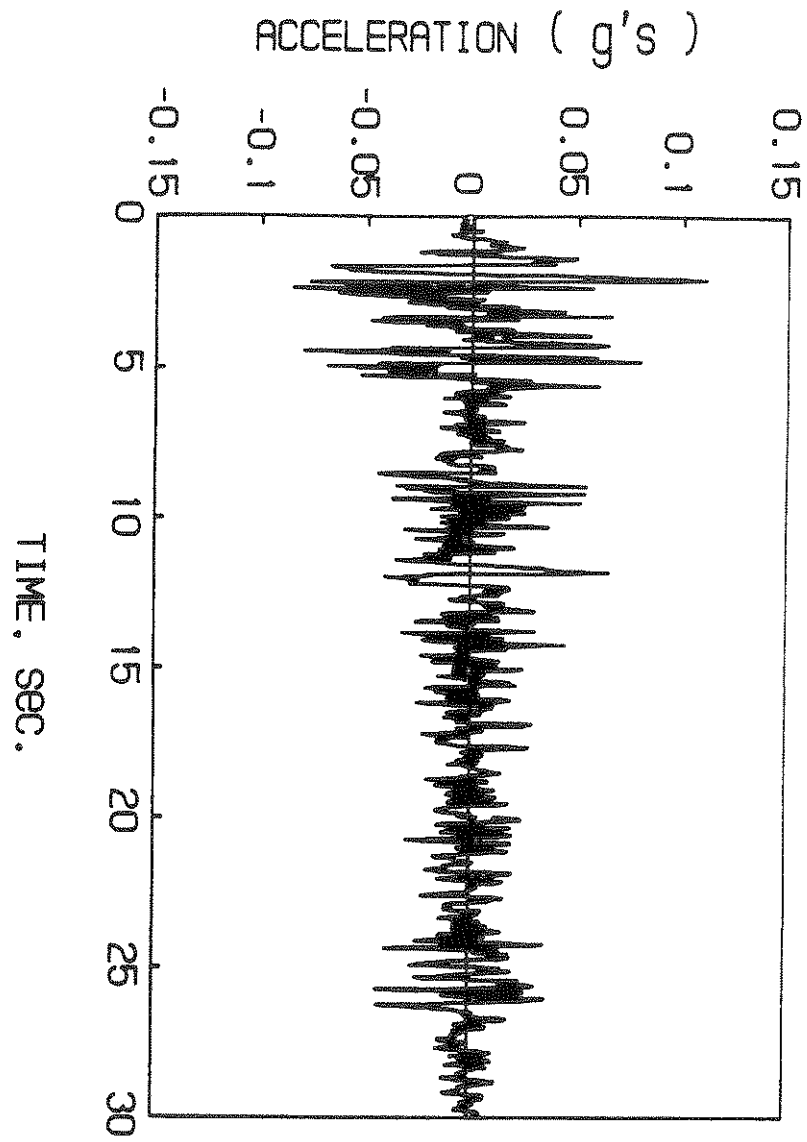


Figure 4-1: 32% El Centro Earthquake Ground Acceleration.

TABLE 4-I: MAXIMUM RESPONSE QUANTITIES OF BUILDING: (A) WITHOUT CONTROL; (B) CLASSICAL OPTIMAL LINEAR CONTROL, EQ.(2.11); (C) INSTANTANEOUS OPTIMAL CONTROL, EQ.(2.10); AND (D) INSTANTANEOUS OPTIMAL CONTROL WITH FEEDBACK $\dot{z}(\tau)$, EQ.(2.8)

STORY	(A) NO CONTROL $y_6^* = 7.99$ cm		(B) $q = 3 \times 10^7$ $U_{max} = 659$ kN $y_6^* = 5.57$ cm		(C) $\alpha = 1.15 \times 10^5$ $U_{max} = 687.8$ kN $y_6^* = 5.29$ cm		(D) $\alpha = 2.8 \times 10^3$ $U_{max} = 650.8$ kN $y_6^* = 5.53$ cm	
	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)
1	0.734	120.4	0.488	113.3	0.518	107.9	0.530	123.4
2	1.453	234.5	1.024	147.6	1.011	143.5	1.036	111.7
3	1.615	283.7	1.153	203.2	1.125	197.8	1.165	157.4
4	1.753	284.5	1.171	205.7	1.148	191.5	1.143	149.8
5	1.651	331.7	1.090	203.7	1.067	199.8	0.991	193.8
6	1.135	361.2	0.790	261.9	0.784	259.0	0.718	234.6

STORY	(A) NO CONTROL $y_6^* = 7.99$ cm		(B) $q = 2 \times 10^9$ $U_{max} = 2236$ kN $y_6^* = 2.29$ cm		(C) $\alpha = 10^6$ $U_{max} = 2129$ kN $y_6^* = 2.41$ cm		(D) $\alpha = 2 \times 10^4$ $U_{max} = 1931$ kN $y_6^* = 2.79$ cm	
	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)	x_i^* (cm)	\ddot{Y}_i^* (cm/s ²)
1	0.734	120.4	0.518	256.8	0.490	260.8	0.383	185.1
2	1.453	234.5	0.488	142.0	0.513	153.3	0.591	155.4
3	1.615	283.7	0.508	158.2	0.530	157.7	0.772	172.4
4	1.753	284.5	0.635	163.8	0.629	165.3	0.723	227.5
5	1.651	331.7	0.749	154.9	0.731	152.6	0.706	198.8
6	1.135	361.2	0.648	233.9	0.637	230.8	0.670	252.2

x_i^* = MAXIMUM DEFORMATION OF ITH STORY UNIT
 \ddot{Y}_i^* = MAXIMUM TOTAL ACCELERATION OF ITH FLOOR
 y_6^* = RELATIVE DISPLACEMENT OF TOP FLOOR WITH RESPECT TO THE GROUND
 U_{max} = MAXIMUM CONTROL FORCE

$$\frac{\Delta t}{2} \underline{Q} = \alpha \left[\begin{array}{c|c} \underline{0} & \underline{0} \\ \hline \underline{Q}_{21} & \underline{Q}_{22} \end{array} \right] \quad (4.1)$$

in which α is a constant, and \underline{Q}_{21} and \underline{Q}_{22} are (6x6) matrices. Since only one controller is installed on the first floor, the i-jth element of \underline{Q}_{21} and \underline{Q}_{22} , denoted by $Q_{21}(i,j)$ and $Q_{22}(i,j)$, respectively, can be chosen to be zero for $i = 2,3,\dots,6$. For illustrative purpose, the following values are assigned to elements of $Q_{21}(1,j)$ and $Q_{22}(1,j)$: $Q_{21}(1,j) = [1660, -1080, 24.1, 73.1, -11.4, 15.1]$, $Q_{22}(1,j) = [43.5, 29.4, 7.8, 7.8, 8.0, 7.2]$.

The maximum building response quantities and the required maximum active control force are shown in Column C of Table 1 for $\alpha = 1.15 \times 10^5$ and 10^6 , respectively.

For the proposed optimal control law, the weighting matrix \underline{Q}^* is partitioned similar to Eq. (4.1) as

$$\underline{Q}^* = \alpha \left[\begin{array}{c|c} \underline{0} & \underline{0} \\ \hline \underline{Q}_{21}^* & \underline{Q}_{22}^* \end{array} \right] \quad (4.2)$$

in which α is a constant, and \underline{Q}_{21}^* and \underline{Q}_{22}^* are (6x6) matrices. Again, the i-jth element of \underline{Q}_{21}^* and \underline{Q}_{22}^* , denoted by $Q_{21}^*(i,j)$ and $Q_{22}^*(i,j)$, respectively, can be chosen to be zero for $i = 2,3,\dots,6$. For illustrative purpose, $Q_{21}^*(1,j)$ and $Q_{22}^*(1,j)$ are given as follows: $Q_{21}^*(1,j) = [3612, 2485, 170, 82.5, 36.8, 24.5]$, $Q_{22}^*(1,j) = [101.7, 71.1, 20.4, 20.3, 19.1, 18.1]$.

The maximum building response quantities, i.e., x_i^* , \ddot{y}_i^* ($i = 1,2,\dots,6$), y_6^* and the required maximum control force U_{\max} are presented in

Column D of Table 4-I for $\alpha = 2.8 \times 10^3$ and 2×10^4 , respectively.

Table 4-I provides a clear comparison for the performance among different optimal control laws, because the required maximum control force is approximately the same. The following observations are made from Table 4-I: (i) The active tendon control system is quite effective in reducing the building response quantities, whereas, the required active control force is well within the practical limit, and (ii) The difference in the performance is minimal for the three optimal control laws investigated.

We next consider that the earthquake ground acceleration $\ddot{X}_0(t)$ is a nonstationary random process with zero mean as described previously. For illustrative purpose, the parameters appearing in the envelope function, the filter and the power spectral density S^2 of the white noise are chosen as follows: $t_1 = 3$ sec., $t_2 = 13$ sec., $c = 0.26$ sec.⁻¹, $\zeta_g = 0.65$, $\omega_g = 18.85$ rad./sec., and $S^2 = 10.824$ cm²/sec².

Time dependent root mean squares of the response vector, $\sigma_z(t)$, and the control force, $\sigma_u(t)$, were computed using the three different optimal control laws described previously. The weighting matrices \underline{Q} and \underline{R} are identical to those used in the previous case. Within 30 seconds of the earthquake episode, the maximum root mean square values of the relative displacement of the first floor and the top floor with respect to the ground, denoted by $\bar{\sigma}_1$ and $\bar{\sigma}_6$, respectively, are presented in Table 4-II. Also presented in Table 4-II are the corresponding maximum root mean square of the required active control force, denoted by $\bar{\sigma}_u$. As observed from Table 4-II, the difference in the performance for each optimal control law is minimal.

TABLE 4-II: MAXIMUM ROOT MEAN SQUARE OF STRUCTURAL RESPONSE AND CONTROL FORCE: (A) WITHOUT CONTROL; (B) CLASSICAL OPTIMAL LINEAR CONTROL, EQ.(2.11); (C) INSTANTANEOUS OPTIMAL CONTROL, EQ.(2.10); AND (D) INSTANTANEOUS OPTIMAL CONTROL WITH FEEDBACK $\dot{Z}(t)$, EQ.(2.8)

	(A) WITHOUT CONTROL	(B) $q=3 \times 10^7$	(C) $\alpha=1.15 \times 10^5$	(D) $\alpha=2.8 \times 10^3$
$\bar{\sigma}_1$ (cm)	0.136	0.077	0.082	0.080
$\bar{\sigma}_6$ (cm)	1.405	0.756	0.760	0.780
$\bar{\sigma}_u$ (kN)	0	473.3	490.6	481.5
	(A) WITHOUT CONTROL	(B) $q=2 \times 10^9$	(C) $\alpha=10^6$	(D) $\alpha=2 \times 10^4$
$\bar{\sigma}_1$ (cm)	0.136	0.074	0.069	0.050
$\bar{\sigma}_6$ (cm)	1.405	0.358	0.363	0.381
$\bar{\sigma}_u$ (kN)	0	1348.9	1283.2	1227.1
$\bar{\sigma}_1$ = MAXIMUM RMS OF 1ST FLOOR RELATIVE DISPLACEMENT $\bar{\sigma}_6$ = MAXIMUM RMS OF TOP FLOOR RELATIVE DISPLACEMENT $\bar{\sigma}_u$ = MAXIMUM RMS OF CONTROL FORCE				

Using the proposed optimal control law, the time dependent root mean square values of the relative displacement of the top floor with respect to the ground, denoted by $\sigma_6(t)$, are plotted in Fig. 4-2. In Fig. 4-2, Curve 0 is the response without control, whereas Curves 1 and 2 are the responses with active tendon control using $\alpha = 2.8 \times 10^3$ and 2×10^4 , respectively, see Table 4-II. The time dependent root mean squares of the required active control force, $\sigma_u(t)$, are presented in Fig. 4-3 as Curves 1 and 2. Curve 1 in Fig. 4-3 is the required active control force for $\alpha = 2.8 \times 10^3$, corresponding to the case for Curve 1 of Fig. 4-2, whereas Curve 2 in Fig. 4-3 corresponds to the case for Curve 2 of Fig. 4-2, $\alpha = 2 \times 10^4$. Finally, the results for the time dependent root mean squares of the response and the active control force using the other two optimal control laws are very close to those shown in Figs. 4-2 and 4-3, and hence they are not presented.

It is observed from Figs. 4-2 and 4-3 and Table 4-II that, under stochastic earthquake ground excitations, (i) the proposed optimal control law with velocity and acceleration feedbacks performs very well, and (ii) the difference in the performance is minimal for the three optimal control laws investigated.

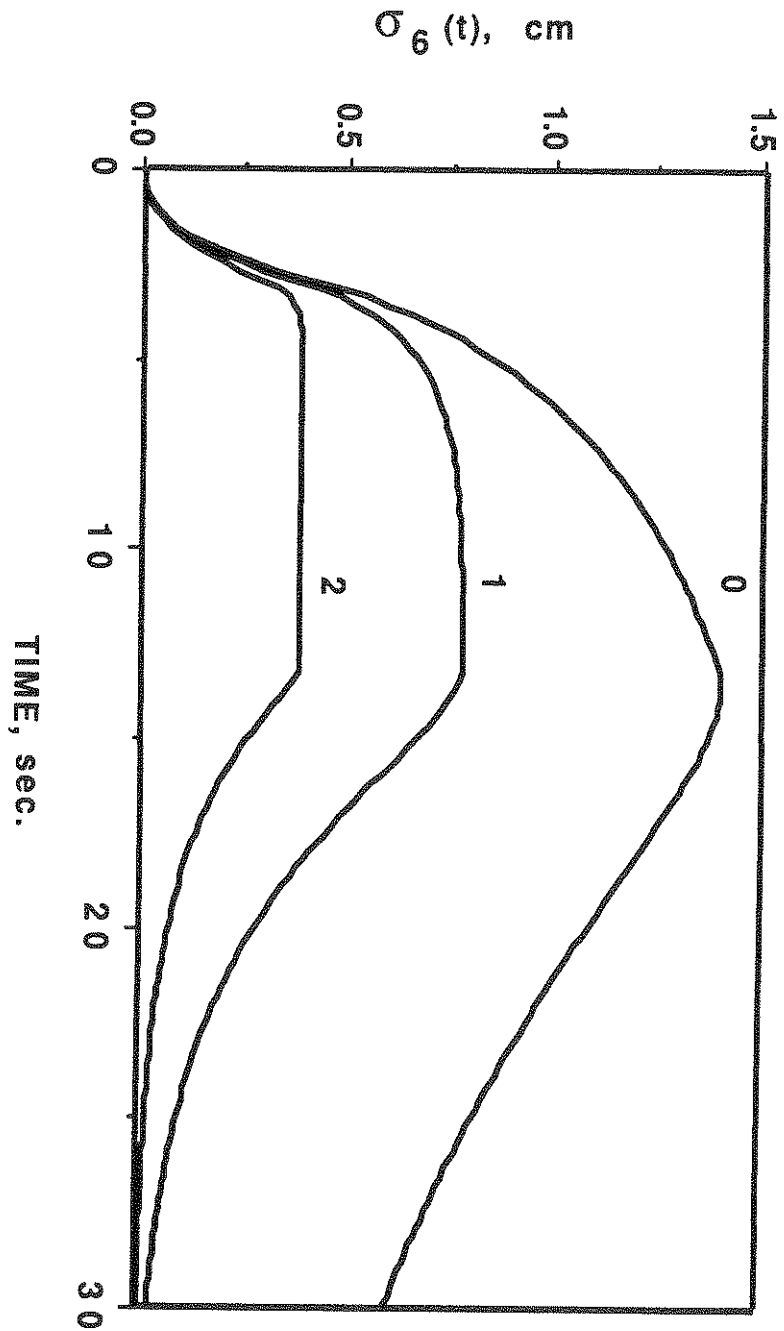


Figure 4-2: Root-Mean-Square of Top Floor Relative Displacement With Respect To The Ground: Curve 0 (Without Control); Curve 1 ($\alpha = 2.8 \times 10^3$); Curve 2 ($\alpha = 2 \times 10^4$).

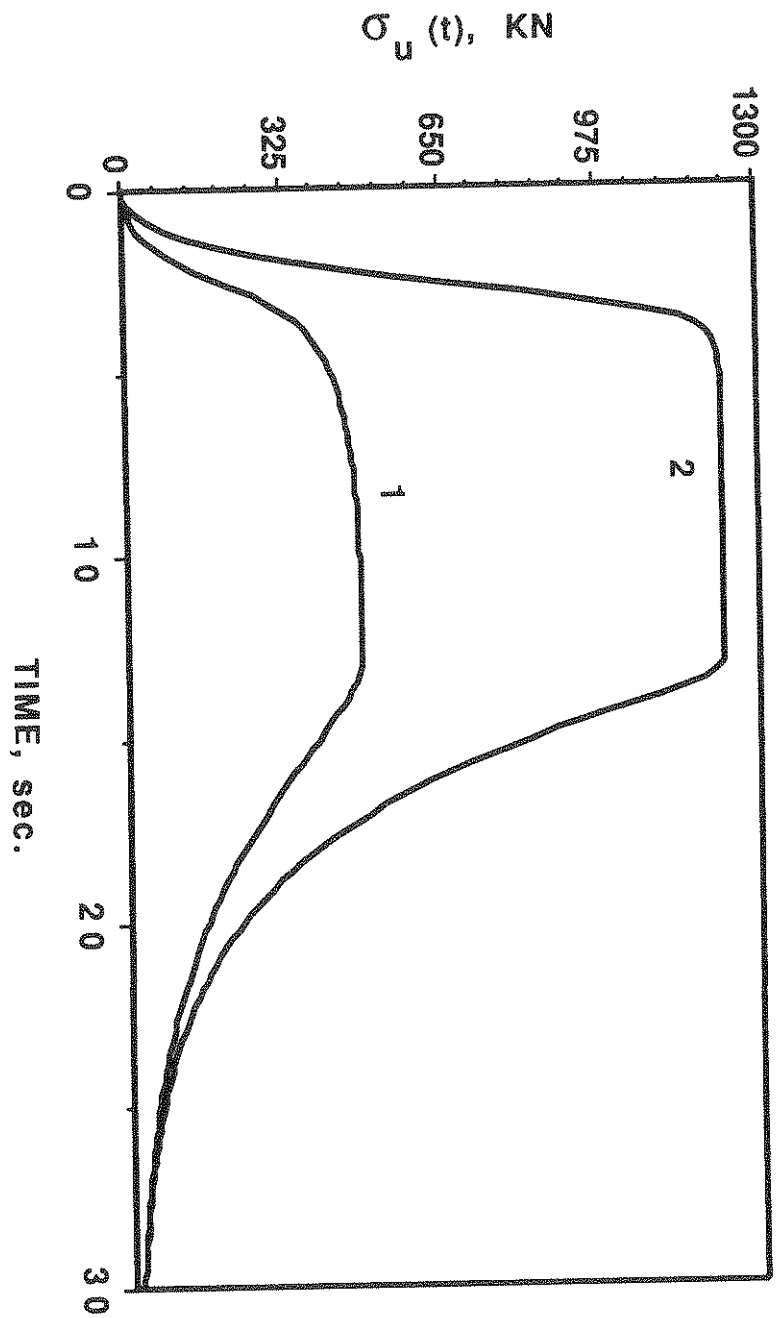


Figure 4-3: Root-Mean-Square of Active Control Force; Curve 1 ($\alpha = 2.8 \times 10^3$); Curve 2 ($\alpha = 2 \times 10^4$).

SECTION 5
CONCLUSION

For practical implementations of an active control system to building structures for seismic hazard mitigations, it is important to avoid the measurement of the displacement response. A new instantaneous optimal control law is proposed, which requires the measurements of the acceleration and velocity responses rather than the displacement and velocity responses. The performance of such an optimal control law has been investigated, evaluated, and compared with other optimal control laws using both deterministic and stochastic earthquake excitations. It is demonstrated that the performance of the proposed optimal control law is as good as other optimal control laws currently available. The contribution of such an optimal control law to practical implementations of an active control system for earthquake hazard mitigation can be significant.

SECTION 6
REFERENCES

1. Chung, L.L., Reinhorn, A.M. and Soong, T.T., "An Experimental Study of Active Structural Control," in Dynamic Response of Structures, (G.C. Hart and R.B. Nelson, eds.), ASCE, New York, 1986, pp. 795-802.
2. Chung, L.L., Reinhorn, A.M. and Soong, T.T., "Experiments on Active Control of Seismic Structures," J. Eng. Mech., ASCE, Vol. 114, 1988, pp. 241-256.
3. Chung, L.L., Lin, R.C., Soong, T.T. and Reinhorn, A.M., "Experimental Study of Active Control of MDOF Structures," Report No. NCEER 88-0025, National Center for Earthquake Engineering Research, Buffalo, New York, 1988.
4. Chung, L.L., Lin, R.C., Soong, T.T. and Reinhorn, A.M., "Experimental Study of Active Control for MDOF Seismic Structures," J. Eng. Mech., ASCE Vol. 115, 1989, pp. 1609-1627.
5. Reinhorn, A.M., Soong, T.T., et al., "Experiments on Active Structural Control Under Seismic Loads," in Computer Utilization in Structural Engineering, J.K. Nelson, Jr. (ed.), ASCE, New York, 1989, pp. 101-110.
6. Soong, T.T., Reinhorn, A.M. and Yang, J.N., "A Standardized Model for Structural Control Experiments and Some Experimental Results," in Structural Control, H.H.E. Leipholz (ed.), Martinus Nijhoff, Amsterdam, 1987, pp. 669-693.
7. Soong, T.T., Reinhorn, A.M. and Yang, J.N., "Active Response Control of Building Structures Under Seismic Excitation," Proc. 9th World Conf. Earthquake Engineering, VIII, Tokyo/Kyoto, Japan, 1988, pp. 453-458.
8. Soong, T.T., "Active Structural Control in Civil Engineering," National Center for Earthquake Engineering Research Technical Report, NCEER-87-0023, SUNY, Nov. 1987.
9. Yang, J.N., Akbarpour, A. and Ghaemmghami, P., "Instantaneous Optimal Control Laws For Tall Building Under Seismic Loads," National Center For Earthquake Engineering Research, Technical Report No. NCEER-TR-87-0007, June 1987.
10. Yang, J.N., Akbarpour, A. and Ghaemmghami, P., "New Optimal Control Algorithms For Structural Control," Journal of Engineering Mechanics, ASCE, Vol. 113, No. 9, Sept. 1987, pp. 1369-1386.
11. Yang, J.N., and Akbarpour, A., "Practical Considerations For Structural Control: System Uncertainty, System Time Delay and Truncation of Small Control Forces," National Center For Earthquake Engineering Research, Technical Report No. NCEER-TR-87-0018, Sept. 1987.

12. Yang, J.N., Long, F.X. and Wong, D., "Optimal Control of Nonlinear Flexible Structures," National Center For Earthquake Engineering Research, Technical Report No. NCEER-TR-88-0002, January 1988.
13. Yang, J.N., Long, F.X., and Wong, D., "Optimal Control of Nonlinear Structures," Journal of Applied Mechanics, ASME, Vol. 55, Dec. 1988, pp. 931-938.
14. Yang, J.N., and Soong, T.T., "Recent Advancement in Active Control of Civil Engineering Structures," Journal of Probabilistic Engineering Mechanics, Vol. 3, No. 4, Dec. 1988, pp. 179-188.
15. Yang, J.N., and Wong, D., "On Aseismic Hybrid Control System," Proc. International Conference on Structural Safety and Reliability, ICOSAR' 89, August 1989, pp. 471-478.
16. Yang, J.N., and Akbarpour, A., "Effect of System Uncertainty on Control of Seismic-Excited Buildings," Journal of Engineering Mechanics, ASCE, Vol. 116, No. 2, Feb. 1990, pp. 462-478.
17. Yang, J.N., Akbarpour, A., and Askar, G. "Effect of Time Delay on Control of Seismic-Excited Buildings," paper accepted to appear in Journal of Structural Engineering, ASCE, 1990.
18. Yang, J.N., Danielians, A. and Liu, S.C., "Aseismic Hybrid Control System For Building Structures Under Strong Earthquake," in Intelligent Structures, edited by K.P. Chong, S.C. Liu and J.C. Li, Elsevier Applied Science, 1990, pp. 179-195, Proc. International Workshop on Intelligent Structures, July 23-27, 1990, Taipei, Taiwan, R.O.C.

APPENDIX:
OPTIMAL CONTROL LAWS

Substituting the Hamiltonian $H(t)$ given by Eq. (2.6) into Eq. (2.7), one obtains the necessary conditions for minimizing the performance index $J^*(t)$ as follows

$$2 \underline{Q}^* \dot{\underline{Z}}(t) + \underline{\lambda}(t) = 0 \quad (\text{A-1})$$

$$2 \underline{R} \underline{U}(t) - \underline{B}' \underline{\lambda}(t) = 0 \quad (\text{A-2})$$

$$\dot{\underline{Z}}(t) = \underline{A} \underline{Z}(t-\Delta t) + \underline{A} \dot{\underline{Z}}(t-\Delta t) \Delta t + \underline{B} \underline{U}(t) + \underline{W}_1 \ddot{\underline{X}}_0(t) \quad (\text{A-3})$$

(i) Optimal Closed-Loop Control (Feedback Control)

It follows from Eq. (A-2) that the optimal control vector $\underline{U}(t)$ is proportional to the Lagrangian multiplier vector $\underline{\lambda}(t)$, i.e.,

$$\underline{U}(t) = \frac{1}{2} \underline{R}^{-1} \underline{B}' \underline{\lambda}(t) \quad (\text{A-4})$$

Let the control vector $\underline{U}(t)$ be regulated by the velocity state vector $\dot{\underline{Z}}(t)$ alone, i.e.,

$$\underline{\lambda}(t) = \underline{\Lambda} \dot{\underline{Z}}(t) \quad (\text{A-5})$$

Then, substitution of Eq. (A-5) into Eq. (A-1) yields

$$\left(2 \underline{Q}^* + \underline{\Lambda} \right) \dot{\underline{Z}}(t) = 0 \quad (\text{A-6})$$

from which the unknown matrix $\underline{\Lambda}$ is obtained, for $\dot{\underline{Z}}(t) \neq 0$,

$$\underline{\Lambda} = - 2 \underline{Q}^* \quad (\text{A-7})$$

The optimal control vector $\underline{U}(t)$ is obtained by substituting Eq. (A-7) into Eq. (A-5) and then into Eq. (A-4) as

$$\underline{U}(t) = - \underline{R}^{-1} \underline{B}' \underline{Q}^* \underline{\dot{Z}}(t) \quad (\text{A-8})$$

(ii) Optimal Open-Loop Control (Feedforward Control)

Let the control vector $\underline{U}(t)$ be regulated by the measured earthquake excitation $\ddot{\underline{X}}_0(t)$. Substituting Eq. (A-3) into Eq. (A-1), one eliminates $\underline{\dot{Z}}(t)$ as follows

$$\underline{\lambda}(t) = -2 \underline{Q}^* \left[\underline{A} \underline{Z}(t-\Delta t) + \underline{A} \underline{\dot{Z}}(t-\Delta t) \Delta t + \underline{B} \underline{U}(t) + \underline{W}_1 \ddot{\underline{X}}_0(t) \right] \quad (\text{A-9})$$

Further substitution of Eq. (A-9) into Eq. (A-4) yields the optimal control vector $\underline{U}(t)$ as

$$\underline{U}(t) = - (\underline{R} + \underline{B}' \underline{Q}^* \underline{B})^{-1} (\underline{B}' \underline{Q}^*) \left[\underline{A} \underline{Z}(t-\Delta t) + \underline{A} \underline{\dot{Z}}(t-\Delta t) \Delta t + \underline{W}_1 \ddot{\underline{X}}_0(t) \right] \quad (\text{A-10})$$

Thus, the optimal control vector is regulated by the measured external excitation $\ddot{\underline{X}}_0(t)$

(iii) Optimal Closed-Open-Loop Control (Feedback and Feedforward Control)

Suppose the optimal control vector is regulated by both the feedback velocity state vector $\underline{\dot{Z}}(t)$ and the external excitation $\ddot{\underline{X}}_0(t)$, i.e.,

$$\underline{\lambda}(t) = \underline{\tilde{\Lambda}} \underline{\dot{Z}}(t) + \underline{\tilde{q}}(t) \quad (\text{A-11})$$

It follows from Eq. (A-4) that

$$\underline{U}(t) = \frac{1}{2} \underline{R}^{-1} \underline{B}' \left[\underline{\tilde{\Lambda}} \underline{\dot{Z}}(t) + \underline{\tilde{q}}(t) \right] \quad (\text{A-12})$$

Now, the term $2 \underline{Q}^* \dot{\underline{Z}}(t)$ appearing in Eq. (A-1) is separated into two terms such that $\underline{Q}^* \dot{\underline{Z}}(t) + \underline{Q}^* \dot{\underline{Z}}(t) + \underline{\lambda}(t) = 0$. Then, only the $\dot{\underline{Z}}(t)$ in the second term is replaced by Eq. (A-3), and $\underline{\lambda}(t)$ and $\underline{U}(t)$ are replaced by Eqs. (A-11) and (A-12), respectively; with the result

$$\begin{aligned} & \left(\underline{Q}^* + \frac{1}{2} \underline{Q}^* \underline{B} \underline{R}^{-1} \underline{B}' \underline{\tilde{\Lambda}} + \underline{\tilde{\Lambda}} \right) \dot{\underline{Z}}(t) + \left(\underline{I} + \frac{1}{2} \underline{Q}^* \underline{B} \underline{R}^{-1} \underline{B}' \right) \underline{\tilde{q}}(t) \\ & + \underline{Q}^* \left[\underline{A} \underline{Z}(t-\Delta t) + \underline{A} \dot{\underline{Z}}(t-\Delta t) \Delta t + \underline{W}_1 \ddot{\underline{X}}_0(t) \right] = 0 \end{aligned} \quad (\text{A-13})$$

It follows from Eq. (A-13) that

$$\left[\underline{Q}^* + \left(\underline{I} + \frac{1}{2} \underline{Q}^* \underline{B} \underline{R}^{-1} \underline{B}' \right) \underline{\tilde{\Lambda}} \right] \dot{\underline{Z}}(t) = 0 \quad (\text{A-14})$$

$$\begin{aligned} & \left(\underline{I} + \frac{1}{2} \underline{Q}^* \underline{B} \underline{R}^{-1} \underline{B}' \right) \underline{\tilde{q}}(t) \\ & + \underline{Q}^* \left[\underline{A} \underline{Z}(t-\Delta t) + \underline{A} \dot{\underline{Z}}(t-\Delta t) \Delta t + \underline{W}_1 \ddot{\underline{X}}_0(t) \right] = 0 \end{aligned} \quad (\text{A-15})$$

Thus, the unknown matrix $\underline{\tilde{\Lambda}}$ and the unknown vector $\underline{\tilde{q}}(t)$ are obtained from Eqs. (A-14) and (A-15) as follows

$$\underline{\tilde{\Lambda}} = - \left(\underline{I} + \frac{1}{2} \underline{Q}^* \underline{B} \underline{R}^{-1} \underline{B}' \right)^{-1} \underline{Q}^* \quad (\text{A-16})$$

$$\underline{\tilde{q}}(t) = \underline{\tilde{\Lambda}} \left[\underline{A} \underline{Z}(t-\Delta t) + \underline{A} \dot{\underline{Z}}(t-\Delta t) \Delta t + \underline{W}_1 \ddot{\underline{X}}_0(t) \right] \quad (\text{A-17})$$

**NATIONAL CENTER FOR EARTHQUAKE ENGINEERING RESEARCH
LIST OF TECHNICAL REPORTS**

The National Center for Earthquake Engineering Research (NCEER) publishes technical reports on a variety of subjects related to earthquake engineering written by authors funded through NCEER. These reports are available from both NCEER's Publications Department and the National Technical Information Service (NTIS). Requests for reports should be directed to the Publications Department, National Center for Earthquake Engineering Research, State University of New York at Buffalo, Red Jacket Quadrangle, Buffalo, New York 14261. Reports can also be requested through NTIS, 5285 Port Royal Road, Springfield, Virginia 22161. NTIS accession numbers are shown in parenthesis, if available.

- NCEER-87-0001 "First-Year Program in Research, Education and Technology Transfer," 3/5/87, (PB88-134275/AS).
- NCEER-87-0002 "Experimental Evaluation of Instantaneous Optimal Algorithms for Structural Control," by R.C. Lin, T.T. Soong and A.M. Reinhorn, 4/20/87, (PB88-134341/AS).
- NCEER-87-0003 "Experimentation Using the Earthquake Simulation Facilities at University at Buffalo," by A.M. Reinhorn and R.L. Ketter, to be published.
- NCEER-87-0004 "The System Characteristics and Performance of a Shaking Table," by J.S. Hwang, K.C. Chang and G.C. Lee, 6/1/87, (PB88-134259/AS). This report is available only through NTIS (see address given above).
- NCEER-87-0005 "A Finite Element Formulation for Nonlinear Viscoplastic Material Using a Q Model," by O. Gyebi and G. Dasgupta, 11/2/87, (PB88-213764/AS).
- NCEER-87-0006 "Symbolic Manipulation Program (SMP) - Algebraic Codes for Two and Three Dimensional Finite Element Formulations," by X. Lee and G. Dasgupta, 11/9/87, (PB88-219522/AS).
- NCEER-87-0007 "Instantaneous Optimal Control Laws for Tall Buildings Under Seismic Excitations," by J.N. Yang, A. Akbarpour and P. Ghaemmaghami, 6/10/87, (PB88-134333/AS).
- NCEER-87-0008 "IDARC: Inelastic Damage Analysis of Reinforced Concrete Frame - Shear-Wall Structures," by Y.J. Park, A.M. Reinhorn and S.K. Kunnath, 7/20/87, (PB88-134325/AS).
- NCEER-87-0009 "Liquefaction Potential for New York State: A Preliminary Report on Sites in Manhattan and Buffalo," by M. Budhu, V. Vijayakumar, R.F. Giese and L. Baumgras, 8/31/87, (PB88-163704/AS). This report is available only through NTIS (see address given above).
- NCEER-87-0010 "Vertical and Torsional Vibration of Foundations in Inhomogeneous Media," by A.S. Veletsos and K.W. Dotson, 6/1/87, (PB88-134291/AS).
- NCEER-87-0011 "Seismic Probabilistic Risk Assessment and Seismic Margins Studies for Nuclear Power Plants," by Howard H.M. Hwang, 6/15/87, (PB88-134267/AS).
- NCEER-87-0012 "Parametric Studies of Frequency Response of Secondary Systems Under Ground-Acceleration Excitations," by Y. Yong and Y.K. Lin, 6/10/87, (PB88-134309/AS).
- NCEER-87-0013 "Frequency Response of Secondary Systems Under Seismic Excitation," by J.A. HoLung, J. Cai and Y.K. Lin, 7/31/87, (PB88-134317/AS).
- NCEER-87-0014 "Modelling Earthquake Ground Motions in Seismically Active Regions Using Parametric Time Series Methods," by G.W. Ellis and A.S. Cakmak, 8/25/87, (PB88-134283/AS).
- NCEER-87-0015 "Detection and Assessment of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 8/25/87, (PB88-163712/AS).
- NCEER-87-0016 "Pipeline Experiment at Parkfield, California," by J. Isenberg and E. Richardson, 9/15/87, (PB88-163720/AS). This report is available only through NTIS (see address given above).

- NCEER-87-0017 "Digital Simulation of Seismic Ground Motion," by M. Shinozuka, G. Deodatis and T. Harada, 8/31/87, (PB88-155197/AS). This report is available only through NTIS (see address given above).
- NCEER-87-0018 "Practical Considerations for Structural Control: System Uncertainty, System Time Delay and Truncation of Small Control Forces," J.N. Yang and A. Akbarpour, 8/10/87, (PB88-163738/AS).
- NCEER-87-0019 "Modal Analysis of Nonclassically Damped Structural Systems Using Canonical Transformation," by J.N. Yang, S. Sarkani and F.X. Long, 9/27/87, (PB88-187851/AS).
- NCEER-87-0020 "A Nonstationary Solution in Random Vibration Theory," by J.R. Red-Horse and P.D. Spanos, 11/3/87, (PB88-163746/AS).
- NCEER-87-0021 "Horizontal Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by A.S. Veletsos and K.W. Dotson, 10/15/87, (PB88-150859/AS).
- NCEER-87-0022 "Seismic Damage Assessment of Reinforced Concrete Members," by Y.S. Chung, C. Meyer and M. Shinozuka, 10/9/87, (PB88-150867/AS). This report is available only through NTIS (see address given above).
- NCEER-87-0023 "Active Structural Control in Civil Engineering," by T.T. Soong, 11/11/87, (PB88-187778/AS).
- NCEER-87-0024 "Vertical and Torsional Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by K.W. Dotson and A.S. Veletsos, 12/87, (PB88-187786/AS).
- NCEER-87-0025 "Proceedings from the Symposium on Seismic Hazards, Ground Motions, Soil-Liquefaction and Engineering Practice in Eastern North America," October 20-22, 1987, edited by K.H. Jacob, 12/87, (PB88-188115/AS).
- NCEER-87-0026 "Report on the Whittier-Narrows, California, Earthquake of October 1, 1987," by J. Pantelid and A. Reinhorn, 11/87, (PB88-187752/AS). This report is available only through NTIS (see address given above).
- NCEER-87-0027 "Design of a Modular Program for Transient Nonlinear Analysis of Large 3-D Building Structures," by S. Srivastav and J.F. Abel, 12/30/87, (PB88-187950/AS).
- NCEER-87-0028 "Second-Year Program in Research, Education and Technology Transfer," 3/8/88, (PB88-219480/AS).
- NCEER-88-0001 "Workshop on Seismic Computer Analysis and Design of Buildings With Interactive Graphics," by W. McGuire, J.F. Abel and C.H. Conley, 1/18/88, (PB88-187760/AS).
- NCEER-88-0002 "Optimal Control of Nonlinear Flexible Structures," by J.N. Yang, F.X. Long and D. Wong, 1/22/88, (PB88-213772/AS).
- NCEER-88-0003 "Substructuring Techniques in the Time Domain for Primary-Secondary Structural Systems," by G.D. Manolis and G. Juhn, 2/10/88, (PB88-213780/AS).
- NCEER-88-0004 "Iterative Seismic Analysis of Primary-Secondary Systems," by A. Singhal, L.D. Lutes and P.D. Spanos, 2/23/88, (PB88-213798/AS).
- NCEER-88-0005 "Stochastic Finite Element Expansion for Random Media," by P.D. Spanos and R. Ghanem, 3/14/88, (PB88-213806/AS).
- NCEER-88-0006 "Combining Structural Optimization and Structural Control," by F.Y. Cheng and C.P. Pantelides, 1/10/88, (PB88-213814/AS).
- NCEER-88-0007 "Seismic Performance Assessment of Code-Designed Structures," by H.H.-M. Hwang, J.-W. Jaw and H.-J. Shau, 3/20/88, (PB88-219423/AS).

- NCEER-88-0008 "Reliability Analysis of Code-Designed Structures Under Natural Hazards," by H.H-M. Hwang, H. Ushiba and M. Shinozuka, 2/29/88, (PB88-229471/AS).
- NCEER-88-0009 "Seismic Fragility Analysis of Shear Wall Structures," by J-W Jaw and H.H-M. Hwang, 4/30/88, (PB89-102867/AS).
- NCEER-88-0010 "Base Isolation of a Multi-Story Building Under a Harmonic Ground Motion - A Comparison of Performances of Various Systems," by F-G Fan, G. Ahmadi and I.G. Tadjbakhsh, 5/18/88, (PB89-122238/AS).
- NCEER-88-0011 "Seismic Floor Response Spectra for a Combined System by Green's Functions," by F.M. Lavelle, L.A. Bergman and P.D. Spanos, 5/1/88, (PB89-102875/AS).
- NCEER-88-0012 "A New Solution Technique for Randomly Excited Hysteretic Structures," by G.Q. Cai and Y.K. Lin, 5/16/88, (PB89-102883/AS).
- NCEER-88-0013 "A Study of Radiation Damping and Soil-Structure Interaction Effects in the Centrifuge," by K. Weissman, supervised by J.H. Prevost, 5/24/88, (PB89-144703/AS).
- NCEER-88-0014 "Parameter Identification and Implementation of a Kinematic Plasticity Model for Frictional Soils," by J.H. Prevost and D.V. Griffiths, to be published.
- NCEER-88-0015 "Two- and Three- Dimensional Dynamic Finite Element Analyses of the Long Valley Dam," by D.V. Griffiths and J.H. Prevost, 6/17/88, (PB89-144711/AS).
- NCEER-88-0016 "Damage Assessment of Reinforced Concrete Structures in Eastern United States," by A.M. Reinhorn, M.J. Seidel, S.K. Kunnath and Y.J. Park, 6/15/88, (PB89-122220/AS).
- NCEER-88-0017 "Dynamic Compliance of Vertically Loaded Strip Foundations in Multilayered Viscoelastic Soils," by S. Ahmad and A.S.M. Israil, 6/17/88, (PB89-102891/AS).
- NCEER-88-0018 "An Experimental Study of Seismic Structural Response With Added Viscoelastic Dampers," by R.C. Lin, Z. Liang, T.T. Soong and R.H. Zhang, 6/30/88, (PB89-122212/AS).
- NCEER-88-0019 "Experimental Investigation of Primary - Secondary System Interaction," by G.D. Manolis, G. Juhn and A.M. Reinhorn, 5/27/88, (PB89-122204/AS).
- NCEER-88-0020 "A Response Spectrum Approach For Analysis of Nonclassically Damped Structures," by J.N. Yang, S. Sarkani and F.X. Long, 4/22/88, (PB89-102909/AS).
- NCEER-88-0021 "Seismic Interaction of Structures and Soils: Stochastic Approach," by A.S. Veletsos and A.M. Prasad, 7/21/88, (PB89-122196/AS).
- NCEER-88-0022 "Identification of the Serviceability Limit State and Detection of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 6/15/88, (PB89-122188/AS).
- NCEER-88-0023 "Multi-Hazard Risk Analysis: Case of a Simple Offshore Structure," by B.K. Bhartia and E.H. Vanmarcke, 7/21/88, (PB89-145213/AS).
- NCEER-88-0024 "Automated Seismic Design of Reinforced Concrete Buildings," by Y.S. Chung, C. Meyer and M. Shinozuka, 7/5/88, (PB89-122170/AS).
- NCEER-88-0025 "Experimental Study of Active Control of MDOF Structures Under Seismic Excitations," by L.L. Chung, R.C. Lin, T.T. Soong and A.M. Reinhorn, 7/10/88, (PB89-122600/AS).
- NCEER-88-0026 "Earthquake Simulation Tests of a Low-Rise Metal Structure," by J.S. Hwang, K.C. Chang, G.C. Lee and R.L. Ketter, 8/1/88, (PB89-102917/AS).
- NCEER-88-0027 "Systems Study of Urban Response and Reconstruction Due to Catastrophic Earthquakes," by F. Kozin and H.K. Zhou, 9/22/88, (PB90-162348/AS).

- NCEER-88-0028 "Seismic Fragility Analysis of Plane Frame Structures," by H.H.-M. Hwang and Y.K. Low, 7/31/88, (PB89-131445/AS).
- NCEER-88-0029 "Response Analysis of Stochastic Structures," by A. Kardara, C. Bucher and M. Shinozuka, 9/22/88, (PB89-174429/AS).
- NCEER-88-0030 "Nonnormal Accelerations Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 9/19/88, (PB89-131437/AS).
- NCEER-88-0031 "Design Approaches for Soil-Structure Interaction," by A.S. Veletsos, A.M. Prasad and Y. Tang, 12/30/88, (PB89-174437/AS).
- NCEER-88-0032 "A Re-evaluation of Design Spectra for Seismic Damage Control," by C.J. Turkstra and A.G. Tallin, 11/7/88, (PB89-145221/AS).
- NCEER-88-0033 "The Behavior and Design of Noncontact Lap Splices Subjected to Repeated Inelastic Tensile Loading," by V.E. Sagan, P. Gergely and R.N. White, 12/8/88, (PB89-163737/AS).
- NCEER-88-0034 "Seismic Response of Pile Foundations," by S.M. Mamoon, P.K. Banerjee and S. Ahmad, 11/1/88, (PB89-145239/AS).
- NCEER-88-0035 "Modeling of R/C Building Structures With Flexible Floor Diaphragms (IDARC2)," by A.M. Reinhorn, S.K. Kunnath and N. Panahshahi, 9/7/88, (PB89-207153/AS).
- NCEER-88-0036 "Solution of the Dam-Reservoir Interaction Problem Using a Combination of FEM, BEM with Particular Integrals, Modal Analysis, and Substructuring," by C-S. Tsai, G.C. Lee and R.L. Ketter, 12/31/88, (PB89-207146/AS).
- NCEER-88-0037 "Optimal Placement of Actuators for Structural Control," by F.Y. Cheng and C.P. Pantelides, 8/15/88, (PB89-162846/AS).
- NCEER-88-0038 "Teflon Bearings in Aseismic Base Isolation: Experimental Studies and Mathematical Modeling," by A. Mokha, M.C. Constantinou and A.M. Reinhorn, 12/5/88, (PB89-218457/AS).
- NCEER-88-0039 "Seismic Behavior of Flat Slab High-Rise Buildings in the New York City Area," by P. Weidlinger and M. Ettouney, 10/15/88, (PB90-145681/AS).
- NCEER-88-0040 "Evaluation of the Earthquake Resistance of Existing Buildings in New York City," by P. Weidlinger and M. Ettouney, 10/15/88, to be published.
- NCEER-88-0041 "Small-Scale Modeling Techniques for Reinforced Concrete Structures Subjected to Seismic Loads," by W. Kim, A. El-Attar and R.N. White, 11/22/88, (PB89-189625/AS).
- NCEER-88-0042 "Modeling Strong Ground Motion from Multiple Event Earthquakes," by G.W. Ellis and A.S. Cakmak, 10/15/88, (PB89-174445/AS).
- NCEER-88-0043 "Nonstationary Models of Seismic Ground Acceleration," by M. Grigoriu, S.E. Ruiz and E. Rosenblueth, 7/15/88, (PB89-189617/AS).
- NCEER-88-0044 "SARCF User's Guide: Seismic Analysis of Reinforced Concrete Frames," by Y.S. Chung, C. Meyer and M. Shinozuka, 11/9/88, (PB89-174452/AS).
- NCEER-88-0045 "First Expert Panel Meeting on Disaster Research and Planning," edited by J. Pantelic and J. Stoye, 9/15/88, (PB89-174460/AS).
- NCEER-88-0046 "Preliminary Studies of the Effect of Degrading Infill Walls on the Nonlinear Seismic Response of Steel Frames," by C.Z. Chrysostomou, P. Gergely and J.F. Abel, 12/19/88, (PB89-208383/AS).


- NCEER-88-0047 "Reinforced Concrete Frame Component Testing Facility - Design, Construction, Instrumentation and Operation," by S.P. Pessiki, C. Conley, T. Bond, P. Gergely and R.N. White, 12/16/88, (PB89-174478/AS).
- NCEER-89-0001 "Effects of Protective Cushion and Soil Compliancy on the Response of Equipment Within a Seismically Excited Building," by J.A. HoLung, 2/16/89, (PB89-207179/AS).
- NCEER-89-0002 "Statistical Evaluation of Response Modification Factors for Reinforced Concrete Structures," by H.H.-M. Hwang and J-W. Jaw, 2/17/89, (PB89-207187/AS).
- NCEER-89-0003 "Hysteretic Columns Under Random Excitation," by G-Q. Cai and Y.K. Lin, 1/9/89, (PB89-196513/AS).
- NCEER-89-0004 "Experimental Study of 'Elephant Foot Bulge' Instability of Thin-Walled Metal Tanks," by Z-H. Jia and R.L. Ketter, 2/22/89, (PB89-207195/AS).
- NCEER-89-0005 "Experiment on Performance of Buried Pipelines Across San Andreas Fault," by J. Isenberg, E. Richardson and T.D. O'Rourke, 3/10/89, (PB89-218440/AS).
- NCEER-89-0006 "A Knowledge-Based Approach to Structural Design of Earthquake-Resistant Buildings," by M. Subramani, P. Gergely, C.H. Conley, J.F. Abel and A.H. Zaghaw, 1/15/89, (PB89-218465/AS).
- NCEER-89-0007 "Liquefaction Hazards and Their Effects on Buried Pipelines," by T.D. O'Rourke and P.A. Lane, 2/1/89, (PB89-218481).
- NCEER-89-0008 "Fundamentals of System Identification in Structural Dynamics," by H. Imai, C-B. Yun, O. Maruyama and M. Shinozuka, 1/26/89, (PB89-207211/AS).
- NCEER-89-0009 "Effects of the 1985 Michoacan Earthquake on Water Systems and Other Buried Lifelines in Mexico," by A.G. Ayala and M.J. O'Rourke, 3/8/89, (PB89-207229/AS).
- NCEER-89-R010 "NCEER Bibliography of Earthquake Education Materials," by K.E.K. Ross, Second Revision, 9/1/89, (PB90-125352/AS).
- NCEER-89-0011 "Inelastic Three-Dimensional Response Analysis of Reinforced Concrete Building Structures (IDARC-3D), Part I - Modeling," by S.K. Kunnath and A.M. Reinhorn, 4/17/89, (PB90-114612/AS).
- NCEER-89-0012 "Recommended Modifications to ATC-14," by C.D. Poland and J.O. Malley, 4/12/89, (PB90-108648/AS).
- NCEER-89-0013 "Repair and Strengthening of Beam-to-Column Connections Subjected to Earthquake Loading," by M. Corazao and A.J. Durrani, 2/28/89, (PB90-109885/AS).
- NCEER-89-0014 "Program EXKAL2 for Identification of Structural Dynamic Systems," by O. Maruyama, C-B. Yun, M. Hoshiya and M. Shinozuka, 5/19/89, (PB90-109877/AS).
- NCEER-89-0015 "Response of Frames With Bolted Semi-Rigid Connections, Part I - Experimental Study and Analytical Predictions," by P.J. DiCorso, A.M. Reinhorn, J.R. Dickerson, J.B. Radzinski and W.L. Harper, 6/1/89, to be published.
- NCEER-89-0016 "ARMA Monte Carlo Simulation in Probabilistic Structural Analysis," by P.D. Spanos and M.P. Mignolet, 7/10/89, (PB90-109893/AS).
- NCEER-89-P017 "Preliminary Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 6/23/89.
- NCEER-89-0017 "Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 12/31/89, (PB90-207895).

- NCEER-89-0018 "Multidimensional Models of Hysteretic Material Behavior for Vibration Analysis of Shape Memory Energy Absorbing Devices, by E.J. Graesser and F.A. Cozzarelli, 6/7/89, (PB90-164146/AS).
- NCEER-89-0019 "Nonlinear Dynamic Analysis of Three-Dimensional Base Isolated Structures (3D-BASIS)," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 8/3/89, (PB90-161936/AS).
- NCEER-89-0020 "Structural Control Considering Time-Rate of Control Forces and Control Rate Constraints," by F.Y. Cheng and C.P. Pantelides, 8/3/89, (PB90-120445/AS).
- NCEER-89-0021 "Subsurface Conditions of Memphis and Shelby County," by K.W. Ng, T-S. Chang and H-H.M. Hwang, 7/26/89, (PB90-120437/AS).
- NCEER-89-0022 "Seismic Wave Propagation Effects on Straight Jointed Buried Pipelines," by K. Elhadi and M.J. O'Rourke, 8/24/89, (PB90-162322/AS).
- NCEER-89-0023 "Workshop on Serviceability Analysis of Water Delivery Systems," edited by M. Grigoriu, 3/6/89, (PB90-127424/AS).
- NCEER-89-0024 "Shaking Table Study of a 1/5 Scale Steel Frame Composed of Tapered Members," by K.C. Chang, J.S. Hwang and G.C. Lee, 9/18/89, (PB90-160169/AS).
- NCEER-89-0025 "DYNA1D: A Computer Program for Nonlinear Seismic Site Response Analysis - Technical Documentation," by Jean H. Prevost, 9/14/89, (PB90-161944/AS).
- NCEER-89-0026 "1:4 Scale Model Studies of Active Tendon Systems and Active Mass Dampers for Aseismic Protection," by A.M. Reinhorn, T.T. Soong, R.C. Lin, Y.P. Yang, Y. Fukao, H. Abe and M. Nakai, 9/15/89, (PB90-173246/AS).
- NCEER-89-0027 "Scattering of Waves by Inclusions in a Nonhomogeneous Elastic Half Space Solved by Boundary Element Methods," by P.K. Hadley, A. Askar and A.S. Cakmak, 6/15/89, (PB90-145699/AS).
- NCEER-89-0028 "Statistical Evaluation of Deflection Amplification Factors for Reinforced Concrete Structures," by H.H.M. Hwang, J-W. Jaw and A.L. Ch'ng, 8/31/89, (PB90-164633/AS).
- NCEER-89-0029 "Bedrock Accelerations in Memphis Area Due to Large New Madrid Earthquakes," by H.H.M. Hwang, C.H.S. Chen and G. Yu, 11/7/89, (PB90-162330/AS).
- NCEER-89-0030 "Seismic Behavior and Response Sensitivity of Secondary Structural Systems," by Y.Q. Chen and T.T. Soong, 10/23/89, (PB90-164658/AS).
- NCEER-89-0031 "Random Vibration and Reliability Analysis of Primary-Secondary Structural Systems," by Y. Ibrahim, M. Grigoriu and T.T. Soong, 11/10/89, (PB90-161951/AS).
- NCEER-89-0032 "Proceedings from the Second U.S. - Japan Workshop on Liquefaction, Large Ground Deformation and Their Effects on Lifelines, September 26-29, 1989," Edited by T.D. O'Rourke and M. Hamada, 12/1/89, (PB90-209388/AS).
- NCEER-89-0033 "Deterministic Model for Seismic Damage Evaluation of Reinforced Concrete Structures," by J.M. Bracci, A.M. Reinhorn, J.B. Mander and S.K. Kunnath, 9/27/89.
- NCEER-89-0034 "On the Relation Between Local and Global Damage Indices," by E. DiPasquale and A.S. Cakmak, 8/15/89, (PB90-173865).
- NCEER-89-0035 "Cyclic Undrained Behavior of Nonplastic and Low Plasticity Silts," by A.J. Walker and H.E. Stewart, 7/26/89, (PB90-183518/AS).
- NCEER-89-0036 "Liquefaction Potential of Surficial Deposits in the City of Buffalo, New York," by M. Budhu, R. Giese and L. Baumgrass, 1/17/89, (PB90-208455/AS).

- NCEER-89-0037 "A Deterministic Assessment of Effects of Ground Motion Incoherence," by A.S. Veletsos and Y. Tang, 7/15/89, (PB90-164294/AS).
- NCEER-89-0038 "Workshop on Ground Motion Parameters for Seismic Hazard Mapping," July 17-18, 1989, edited by R.V. Whitman, 12/1/89, (PB90-173923/AS).
- NCEER-89-0039 "Seismic Effects on Elevated Transit Lines of the New York City Transit Authority," by C.J. Costantino, C.A. Miller and E. Heymsfield, 12/26/89, (PB90-207887/AS).
- NCEER-89-0040 "Centrifugal Modeling of Dynamic Soil-Structure Interaction," by K. Weissman, Supervised by J.H. Prevost, 5/10/89, (PB90-207879/AS).
- NCEER-89-0041 "Linearized Identification of Buildings With Cores for Seismic Vulnerability Assessment," by I-K. Ho and A.E. Aktan, 11/1/89.
- NCEER-90-0001 "Geotechnical and Lifeline Aspects of the October 17, 1989 Loma Prieta Earthquake in San Francisco," by T.D. O'Rourke, H.E. Stewart, F.T. Blackburn and T.S. Dickerman, 1/90, (PB90-208596/AS).
- NCEER-90-0002 "Nonnormal Secondary Response Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 2/28/90.
- NCEER-90-0003 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/16/90.
- NCEER-90-0004 "Catalog of Strong Motion Stations in Eastern North America," by R.W. Busby, 4/3/90.
- NCEER-90-0005 "NCEER Strong-Motion Data Base: A User Manual for the GeoBase Release (Version 1.0 for the Sun3)," by P. Friberg and K. Jacob, 3/31/90.
- NCEER-90-0006 "Seismic Hazard Along a Crude Oil Pipeline in the Event of an 1811-1812 Type New Madrid Earthquake," by H.H.M. Hwang and C-H.S. Chen, 4/16/90.
- NCEER-90-0007 "Site-Specific Response Spectra for Memphis Sheahan Pumping Station," by H.H.M. Hwang and C.S. Lee, 5/15/90.
- NCEER-90-0008 "Pilot Study on Seismic Vulnerability of Crude Oil Transmission Systems," by T. Ariman, R. Dobry, M. Grigoriu, F. Kozin, M. O'Rourke, T. O'Rourke and M. Shinozuka, 5/25/90.
- NCEER-90-0009 "A Program to Generate Site Dependent Time Histories: EQGEN," by G.W. Ellis, M. Srinivasan and A.S. Cakmak, 1/30/90.
- NCEER-90-0010 "Active Isolation for Seismic Protection of Operating Rooms," by M.E. Talbott, Supervised by M. Shinozuka, 6/8/9.
- NCEER-90-0011 "Program LINEARID for Identification of Linear Structural Dynamic Systems," by C-B. Yun and M. Shinozuka, 6/25/90.
- NCEER-90-0012 "Two-Dimensional Two-Phase Elasto-Plastic Seismic Response of Earth Dams," by A.N. Yiagos, Supervised by J.H. Prevost, 6/20/90.
- NCEER-90-0013 "Secondary Systems in Base-Isolated Structures: Experimental Investigation, Stochastic Response and Stochastic Sensitivity, by G.D. Manolis, G. Juhn, M.C. Constantinou and A.M. Reinhorn, 7/1/90.
- NCEER-90-0014 "Seismic Behavior of Lightly-Reinforced Concrete Column and Beam-Column Joint Details," by S.P. Pessiki, C.H. Conley, P. Gergely and R.N. White, 8/22/90.
- NCEER-90-0015 "Two Hybrid Control Systems for Building Structures Under Strong Earthquakes," by J.N. Yang and A. Daniellians, 6/29/90.

NCEER-90-0016

"Instantaneous Optimal Control with Acceleration and Velocity Feedback," by J.N. Yang and Z. Li,
6/29/90.



National Center for Earthquake Engineering Research
State University of New York at Buffalo