

ISSN 1088-3800

Establish Representative Pier Types for Comprehensive Study: Eastern United States

by

J. Kulicki and Z. Prucz

Technical Report NCEER-96-0005

May 28, 1996


This research was conducted at Modjeski & Masters, Inc. and was supported by the Federal Highway Administration under contract number DTFH61-92-C-00112.

NOTICE

This report was prepared by Modjeski & Masters, Inc. as a result of research sponsored by the National Center for Earthquake Engineering Research (NCEER) through a contract from the Federal Highway Administration. Neither NCEER, associates of NCEER, its sponsors, Modjeski & Masters, Inc. nor any person acting on their behalf:

- a. makes any warranty, express or implied, with respect to the use of any information, apparatus, method, or process disclosed in this report or that such use may not infringe upon privately owned rights; or
- b. assumes any liabilities of whatsoever kind with respect to the use of, or the damage resulting from the use of, any information, apparatus, method, or process disclosed in this report.

Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of NCEER or the Federal Highway Administration.

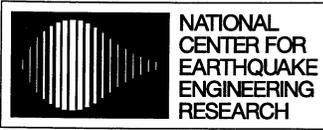

Headquartered at the State University of New York at Buffalo

**Establish Representative Pier Types for
Comprehensive Study:
Eastern United States**

by

J. Kulicki¹ and Z. Prucz²

Publication Date: May 28, 1996

Submittal Date: December 8, 1994

Technical Report NCEER-96-0005

NCEER Task Number 112-D-1.1(a)

FHWA Contract Number DTFH61-92-C-00112

- 1 President and Chief Engineer, Modjeski and Masters, Inc.
- 2 Associate, Modjeski and Masters, Inc.


NATIONAL CENTER FOR EARTHQUAKE ENGINEERING RESEARCH
State University of New York at Buffalo
Red Jacket Quadrangle, Buffalo, NY 14261

PREFACE

The National Center for Earthquake Engineering Research (NCEER) was established in 1986 to develop and disseminate new knowledge about earthquakes, earthquake-resistant design and seismic hazard mitigation procedures to minimize loss of life and property. The emphasis of the Center is on eastern and central United States *structures*, and *lifelines* throughout the country that may be exposed to any level of earthquake hazard.

NCEER's research is conducted under one of four Projects: the Building Project, the Nonstructural Components Project, and the Lifelines Project, all three of which are principally supported by the National Science Foundation, and the Highway Project which is primarily sponsored by the Federal Highway Administration.

The research and implementation plan in years six through ten (1991-1996) for the Building, Nonstructural Components, and Lifelines Projects comprises four interdependent elements, as shown in the figure below. Element I, Basic Research, is carried out to support projects in the Applied Research area. Element II, Applied Research, is the major focus of work for years six through ten for these three projects. Demonstration Projects under Element III have been planned to support the Applied Research projects and include individual case studies and regional studies. Element IV, Implementation, will result from activity in the Applied Research projects, and from Demonstration Projects.

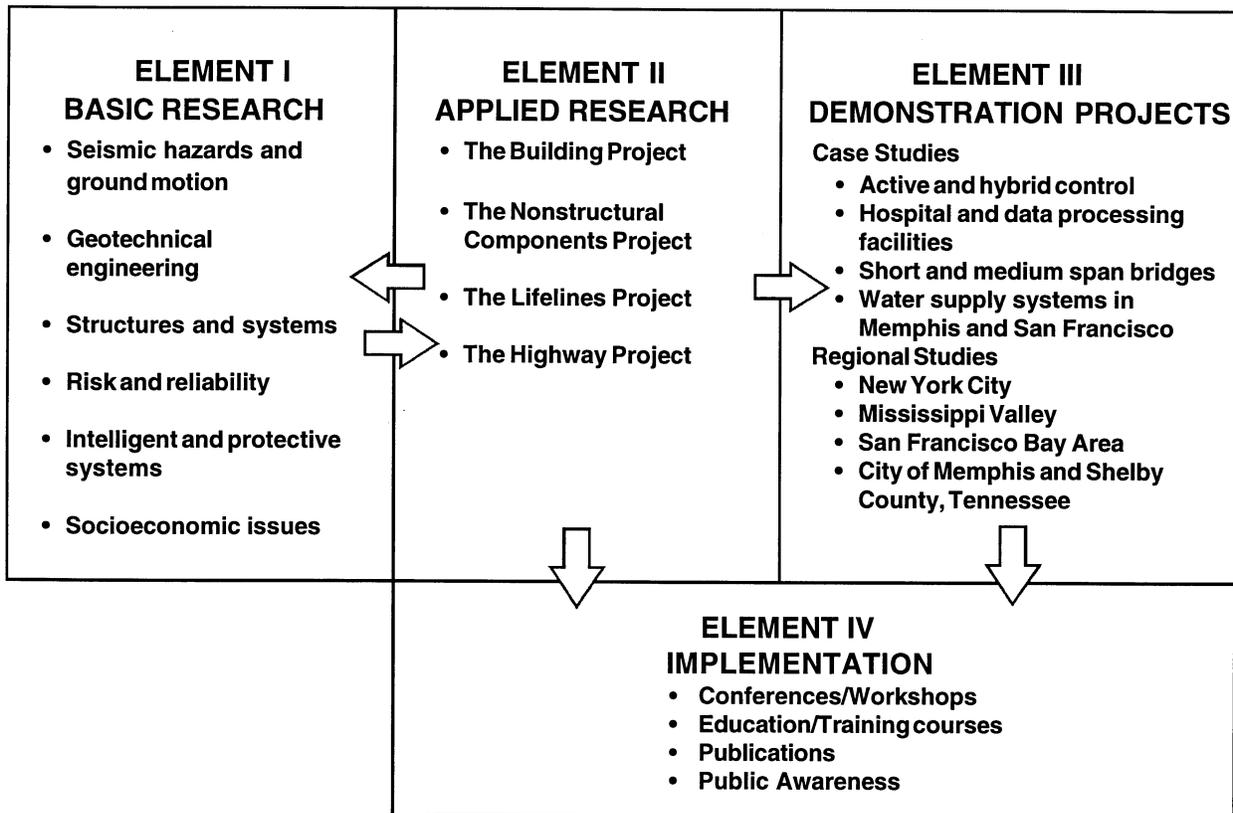


Research under the **Highway Project** develops retrofit and evaluation methodologies for existing bridges and other highway structures (including tunnels, retaining structures, slopes, culverts, and pavements), and develops improved seismic design criteria and procedures for bridges and other highway structures. Specifically, tasks are being conducted to: (1) assess the vulnerability of highway systems and structures; (2) develop concepts for retrofitting vulnerable highway structures and components; (3) develop improved design and analysis methodologies for bridges, tunnels, and retaining structures, with particular emphasis on soil-structure interaction mechanisms and their influence on structural response; and (4) review and improve seismic design and performance criteria for new highway systems and structures.

Highway Project research focuses on one of two distinct areas: the development of improved design criteria and philosophies for new or future highway construction, and the development of improved analysis and retrofitting methodologies for existing highway systems and structures. The research discussed in this report is a result of work conducted under the new highway construction project, and was performed within Task 112-D-1.1(a), "Establish Representative Pier Types for Comprehensive Study" of the project as shown in the flowchart.

The overall objective of this task is to identify and establish pier designs and details currently in use throughout the U.S. The task was split into two parts, one focused on collecting and establishing representative pier types in the eastern U.S. and the other concerned with western U.S. practice. This report describes bridge pier types and seismic design and detailing procedures typical of the eastern U.S. since about 1980. The companion report, NCEER-96-0006, describes pier types and seismic design and detailing procedures representative of the western U.S. since the mid-1970s.

The states contributing material include Louisiana, New York, North Carolina and Pennsylvania. Pile design issues in pile bents, bent cap design and detailing issues in pile and column bents, column and pier design and detailing issues, and footing details issues are addressed.

SEISMIC VULNERABILITY OF HIGHWAY CONSTRUCTION
FHWA Contract DTFH61-92-C-00112

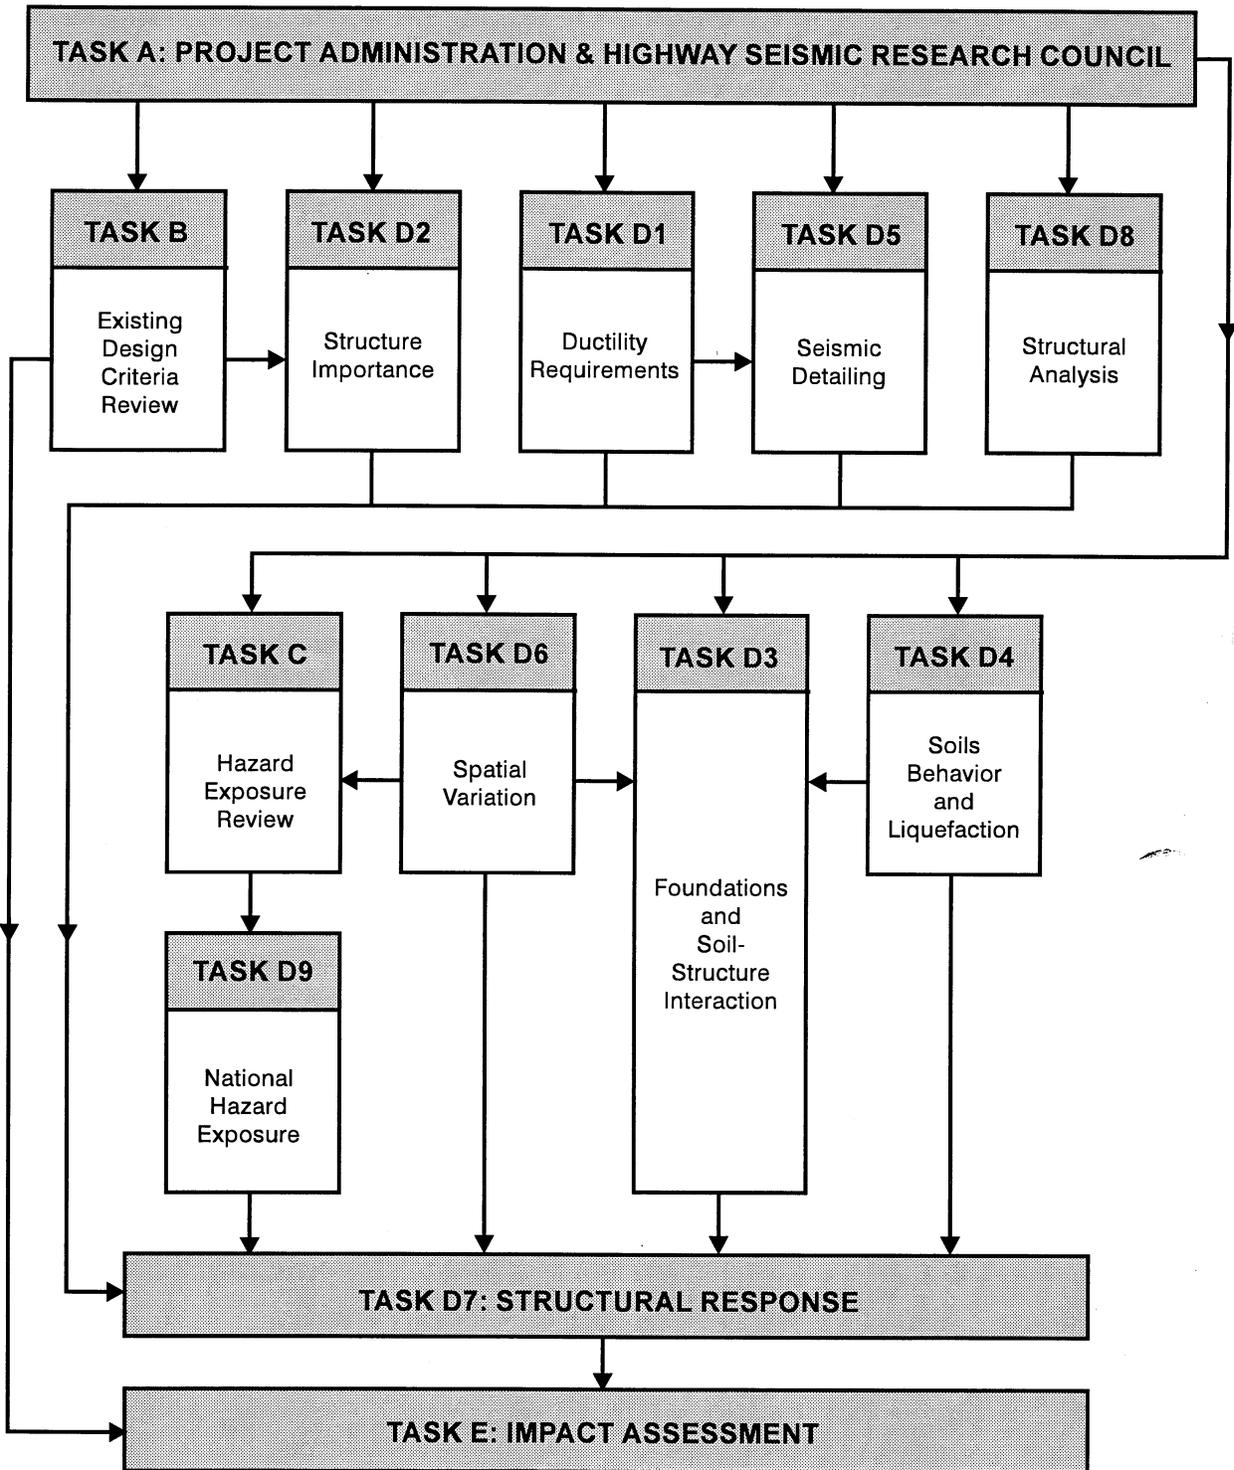

ABSTRACT

This report describes bridge types and seismic design and detailing procedures typical of the eastern part of the United States. The report contains examples taken from state bridge plans and actual bridge designs. Some of the examples comply with current seismic provisions, while others represent older designs made before these requirements were introduced. Advantages and disadvantages of various bridge configurations and details with respect to seismic behavior are discussed. Historical accounts of changes in bridge design and detailing practices are also included.

The seismic design of bridges in the eastern part of the United States follows the AASHTO Specifications for Seismic Design of Highway Bridges in conjunction with state specific policies that address the unique conditions of each state. Most bridges in the east fall in Seismic Performance Categories A and B, but in many cases part or all of the requirements of Seismic Performance Category C are also followed.

The bridge pier types included in this report are divided into pile bents, column bents and solid wall piers. The bent cap types include rectangular caps, inverted T-caps and hammerhead caps. The report highlights the unique nature of the seismic response of various bridge configurations and details. Common and dissimilar elements between east and west construction practices are identified.

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1	INTRODUCTION	1
2	REPRESENTATIVE PIER TYPES	3
2.1	Pile Bents	3
2.2	Column Bents	3
2.3	Solid Wall Piers	4
3	PILE DESIGN ISSUES IN PILE BENTS	11
3.1	Pile Batter and Maximum Slenderness Requirements	11
3.2	Pile-Cap Connection Details	11
4	BENT CAP DESIGN AND DETAILING ISSUES IN PILE BENTS	13
4.1	Cap Dimensions	13
4.2	Longitudinal Cap Steel	14
4.3	Cap Shear Reinforcement	14
4.4	Other Cap Reinforcement	15
5	COLUMN AND PIER DESIGN AND DETAILING ISSUES	27
5.1	Column Dimensions	27
5.2	Column Vertical Reinforcement	27
5.3	Column Transverse Reinforcement	28
5.4	Column Reinforcement Splices	30
5.5	Extension of Column Reinforcement into Bent Caps and Footings	30
5.6	Column Reinforcing Details at Struts	31
5.7	Pier Wall Design and Reinforcement Details	32
6	BENT CAP DESIGN AND DETAILING ISSUES IN COLUMN BENTS	51
6.1	Cap Dimensions	51
6.2	Longitudinal Cap Steel	51
6.3	Cap Shear Reinforcement	52
7	FOOTING DETAILS ISSUES	61
7.1	Footing Design Details	61
7.2	Reinforcing Steel Details	61

TABLE OF CONTENTS (Cont'd)

SECTION	TITLE	PAGE
8	CONCLUSIONS	73
9	REFERENCES	75

LIST OF ILLUSTRATIONS

FIGURE	TITLE	PAGE
2-1	North Carolina Seismic Performance Category Map	5
2-2	Pennsylvania Acceleration Coefficient Map	6
2-3	New York Seismic Performance Category Map	7
2-4	Typical Trestle Bridge Layout with Pile Bents	8
2-5	Typical Column Bent Details	9
4-1	Louisiana Typical Single Row Pile Bent Details	16
4-2	Single Row Pile Bent Reinforcing Details	17
4-3	Louisiana Typical Double Row Pile Bent Details	18
4-4	Double Row Pile Bent Reinforcing Details	19
4-5	Louisiana Pile Plug Details	20
4-6	North Carolina Typical Single Row Pile Bent Details	21
4-7	North Carolina Typical Double Row Pile Bent Details	22
4-8	North Carolina Saddle Cap Details	23
4-9	North Carolina Interior Bent Pile-Cap Connection Details	24
4-10	North Carolina Stepped Bent Cap Reinforcing Details	25
5-1	Louisiana Circular Column Bent Details	33
5-2	Louisiana Rectangular Column Bent Details	34
5-3a	New York Rectangular Column Bent Details - Elevation	35
5-3b	New York Rectangular Column Bent Details - Cross Sections	36
5-3c	New York Rectangular Column Bent Details - Cap Reinforcement	37
5-4a	North Carolina Unequal Column Height Bent Details- Elevation	38
5-4b	North Carolina Unequal Column Height Bent Details- Cross Sections	39
5-5	New York Vertical Column Reinforcement Requirements	40
5-6	New York Transverse Column Reinforcement Requirements	41
5-7	North Carolina Column Spiral Reinforcing Requirements	42
5-8	North Carolina Column Connection Details for SPC B	43

LIST OF ILLUSTRATIONS (Cont'd)

FIGURE	TITLE	PAGE
5-9	North Carolina Column Spiral Reinforcing at Struts	44
5-10	North Carolina Pier Crash Wall Details for Multicolumn Bents	45
5-11a	Pennsylvania Pier Wall with Hammerhead Details - Elevation	46
5-11b	Pennsylvania Pier Wall with Hammerhead Cap Details - Cross Sections	47
5-12a	Pennsylvania Pier Wall with Widened Top Cap Details - Elevation	48
5-12b	Pennsylvania Pier Wall with Widened Top Cap Details - Cross Sections	49
5-13	New York Pier Wall Details	50
6-1	North Carolina Column Bent with Rectangular Cap Details	53
6-2	Louisiana Single Column Bent with Hammerhead Cap Details	54
6-3a	Pennsylvania Hammerhead Cap Details - Elevation	55
6-3b	Pennsylvania Hammerhead Cap Details - Cross Sections	56
6-4a	New York Hammerhead Cap Details - Elevations	57
6-4b	New York Hammerhead Cap Details - Cross Sections	58
6-5	Louisiana Inverted T-Bent Cap Requirements	59
6-6	Louisiana Inverted T-Bent Cap Details	60
7-1	Louisiana Footing Detail Requirements	63
7-2	Louisiana Pile Supported Footing Details	64
7-3	North Carolina Footing Detail Requirements	65
7-4	North Carolina Footing Details	66
7-5	Pennsylvania Footing Details A	67
7-6	Pennsylvania Footing Details B	68
7-7	Pennsylvania Pier Wall Footing Details	69
7-8a	New York Column Bent with Continuous Footing - Elevation	70
7-8b	New York Column Bent with Continuous Footing - Cross Section	71
7-9	New York Footing Layout Reinforcement Requirements	72

LIST OF TABLES

TABLE	TITLE	PAGE
4-1	Louisiana Bent Cap Depth Requirements	13
4-2	North Carolina Bent Cap Width Requirements	13

SECTION 1 INTRODUCTION

In the summer of 1993, the National Center for Earthquake Engineering Research initiated a research program directed at developing improved seismic analysis and design procedures for highway infrastructure. The research program is sponsored by the Federal Highway Administration of the U.S. Department of Transportation and consists of a series of special studies, each focussed on the seismic analysis or design of specific highway system components (e.g., bridges or tunnels) and structural elements (e.g., foundations or substructures).

As a basis for developing improved bridge design standards, an early task within this program was conducted to identify and establish pier designs and details currently in use throughout the U.S. The task was split into two parts, one focused on collecting and establishing representative pier types in the eastern U.S. (Task 112-D-1.1(a)) and the other concerned with western U.S. practice (Task 112-D-1.1(b)).

This report describes bridge pier types and seismic design and detailing procedures typical of the eastern U.S. since about 1980. The companion report NCEER 96-0006 describes pier types and seismic design and detailing procedures representative of the western U.S., primarily focussing on Caltrans practice.

In general, seismic policies regarding the design of the eastern bridges have followed the guidelines of the AASHTO Standard Specifications for Seismic Design of Highway Bridges in conjunction with additional state specific requirements. The extent of the AASHTO seismic design and detailing requirements varies with the Seismic Performance Category (SPC) assigned to a bridge. The SPC depends on the importance classification of the bridge and the acceleration coefficient at the site. Most bridges in the eastern part of the United States fall into either SPC A or B, but in many cases part or all of the requirements of SPC C are also followed.

The requirements of SPC A pertain only to the connection of the superstructure to the substructure design (Section 4.6) and the minimum bearing support lengths (Section 4.9.1). No other consideration of seismic forces is required for the design of structural components. The requirements of SPC B pertain to the design force requirements for superstructure and substructure structural members and connections, foundations, abutments and retaining walls (Section 4.7), and the minimum bearing support lengths (Section 4.9.2). Detailing requirements for reinforced concrete columns for SPC B are specified in Section 8.3 to ensure some level of ductility. They include minimum transverse reinforcement requirements at the top and bottom of a column (Section 8.4.1 (D)) and maximum spacing limits of transverse reinforcement (Section 8.4.1 (E)). Additional design requirements for foundations and

abutments for SPC B are included in Section 6.3. The requirements for SPC C are more stringent. They pertain to the design force requirements for superstructure and substructure structural members and connections, foundations, abutments and retaining walls (Section 4.8) and minimum bearing support length (Section 4.9.3). Detailing requirements for reinforced concrete are specified in Section 8.4 for columns, piers, column connections, and construction joints in piers and columns to ensure adequate ductility capacity. Additional requirements for foundations and abutments for SPC C are included in Section 6.4.

Historically, due to the low frequency of earthquakes in the eastern United States the awareness for the need of providing adequate seismic design and detailing guidelines has been relatively low, and has generally followed the experience of the state of California. In 1973, after the 1971 San Fernando earthquake when many bridges were damaged, Caltrans adopted new seismic design criteria that have formed the basis for the modern approach to seismic design. The Caltrans specifications have been regularly refined and updated to incorporate technical developments in earthquake engineering and lessons from the 1989 Loma Prieta earthquake and the 1994 Northridge earthquake. In 1975, AASHTO published a modified version of the original Caltrans criteria as Interim Specifications, and in 1983 it adopted the ATC-6 report, a comprehensive state-of-the-art document funded by the Federal Highway Administration and Caltrans, as an approved alternate Guide Specification for seismic design. However, it was only in 1991, when AASHTO incorporated the 1983 Guide Specification into the Standard Specifications as Division I-A, that bridge designers in the low seismic zones of the eastern United States became fully aware of the various aspects inherent in the latest seismic design and detailing practices. Today, the bridge engineering community is also aware of the unique nature of the seismic hazard in the central and eastern United States where the maximum credible earthquake is expected to be significantly larger than the design earthquake, and many designs are even more conservative than the AASHTO requirements for the applicable Seismic Performance Category.

SECTION 2 REPRESENTATIVE PIER TYPES (EAST)

Typical piers, connections and details have been identified from the bridge design and construction practices of several representative eastern states (Louisiana, North Carolina, Pennsylvania and New York). The pier types include pile bents, column bents and solid wall piers. Representative examples of bent and pier type details are provided in the figures presented at the end of each section. The seismic design of bridges in Louisiana follows the requirements of the AASHTO Specifications for the Seismic Design of Highway Bridges, with the entire State of Louisiana in Seismic Performance Category (SPC) A. Bridges in North Carolina, Pennsylvania and New York fall into either the SPC A or B, as shown in figures 2-1, 2-2 and 2-3. The seismic design of bridges in North Carolina, Pennsylvania and New York is based on the AASHTO specifications for SPC A or B. In Pennsylvania and New York the SPC B requirements include adjustments that incorporate many of the SPC C requirements regarding column reinforcement, piers, column connections, foundations and abutments.

2.1 Pile Bents

Description: Pile bents consist of timber, steel or prestressed concrete piles with a cast-in-place reinforced concrete cap. The piles extend out of the ground to serve as columns and are embedded into the bottom of the cap. Double row pile bents are included when additional capacity or stability is needed. A typical trestle bridge layout with pile bents is shown in figure 2-4. Prestressed concrete piles are most common, but in some states such as North Carolina steel H-piles are also common, and steel pile bent details are provided. The minimum number of piles per bent is usually four, with the exterior piles battered in the higher bents. The reinforced concrete cap is wider than the width of the piles so that the bottom corner longitudinal reinforcing bars could be continuous along the cap. Wider bent caps are also provided to allow for possible pile mislocations. The bridge superstructure is connected to the pile bent cap mainly by elastomeric bearings. Representative pile bent details are shown in figures 4-1 through 4-10.

2.2 Column Bents

Description: Column bents consist of a reinforced concrete frame attached to a separately constructed footing. Two or three circular columns of solid cross-section with a rectangular cap are most common (see figure 2-5). One column bents and columns with a solid rectangular cross-section are also quite common. The superstructure is supported on bearings anchored to the top of the cap. In general, column spacings do not exceed 20 feet center to center of columns. Intermediate struts are usually used on the taller bents. North Carolina standards, for example, require that column struts be placed at approximately mid height in columns over 25 feet high and less than 45 feet. Two struts are required in columns in excess

of 45 feet. New York standards require that reinforced concrete struts be provided near the middle half of a column when the slenderness ratio of the column in a direction parallel to the support is over 60. The rectangular reinforced concrete caps are most common (see figure 5-1). Hammerhead type caps are usually used in single column bents (see figure 6-2). Inverted T-caps are becoming more and more popular in current designs (see figure 6-5). They are usually used for aesthetic reasons, or when it is necessary to reduce the overall depth of the cap plus the superstructure. Stepped bent caps (see figure 4-10) are also common. Columns may have individual or continuous footings, depending on the soil conditions. Representative column bent details are shown in figures 5-1 through 5-10 and 6-1 through 6-6.

Historical: In the past, column struts were not required in New York, as long as the slenderness effects were considered in design.

2.3 Solid Wall Piers

Description: A vertical support is considered to be a wall pier when the ratio of the clear height to the maximum plan dimension of the support is less than 2.5. Full or partial height pier walls are often used at stream crossings to prevent the accumulation of debris between columns, and as crash walls in bridges over railways along or near the railroad track. To accommodate the geometric requirements of the superstructure, solid piers may have a hammer head type cap, or may be widened at the top (see figures 5-11 and 5-12). Representative solid wall pier details are shown in figures 5-11 through 5-13.

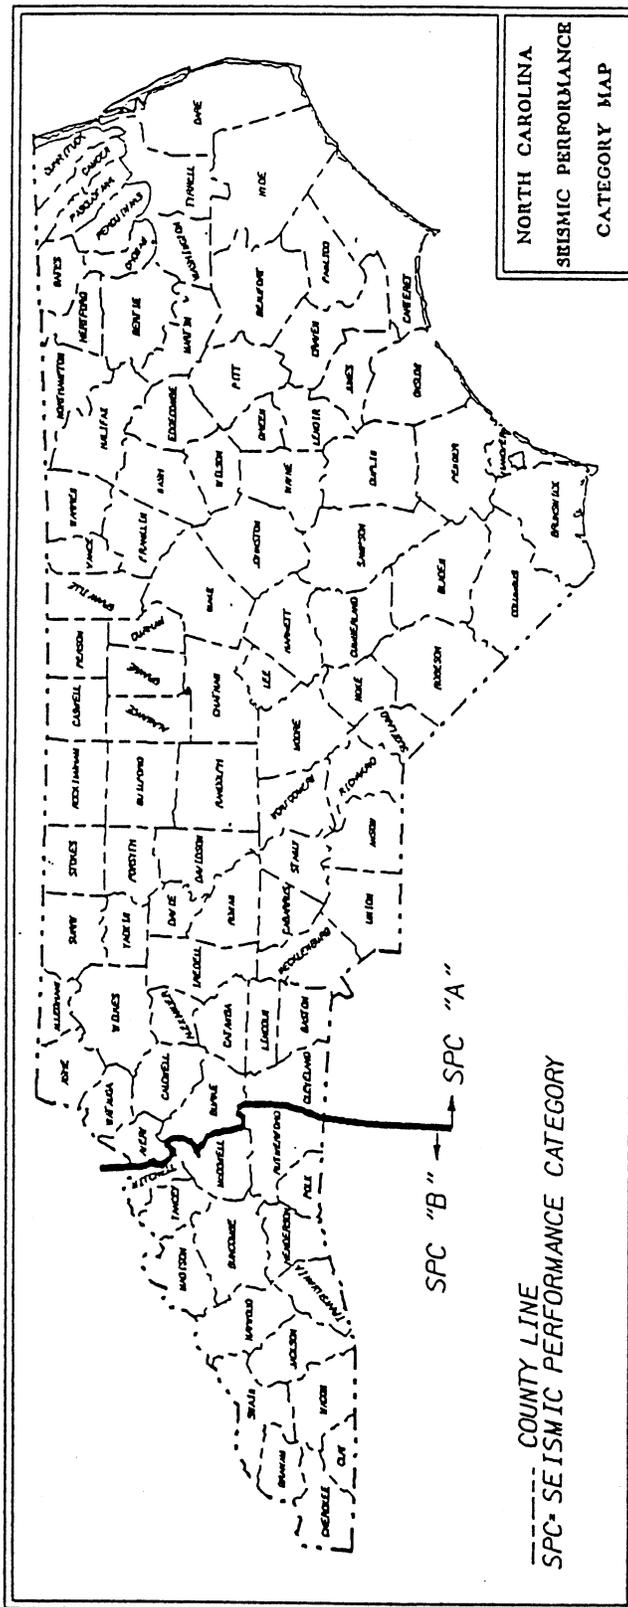


FIGURE 2-1 North Carolina Seismic Performance Category Map

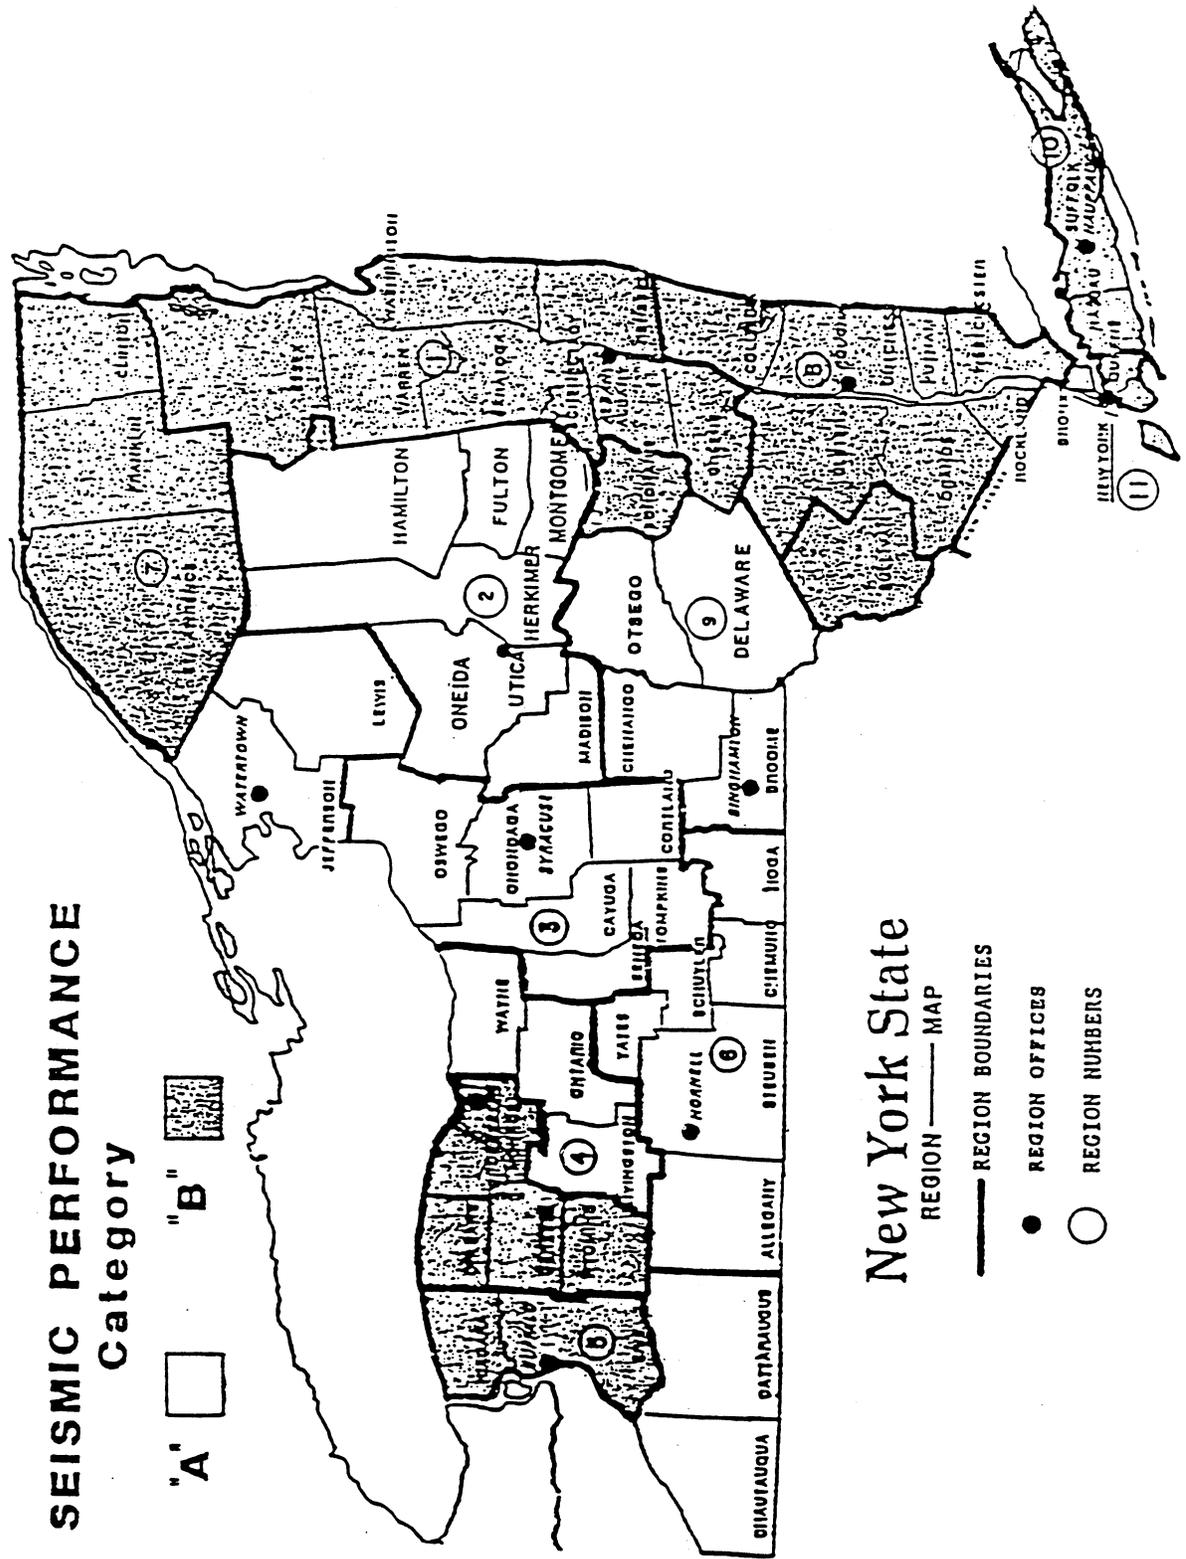


FIGURE 2-3 New York Seismic Performance Category Map

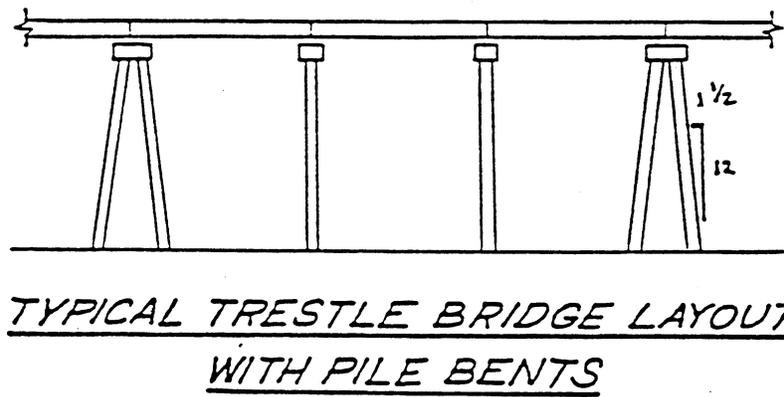
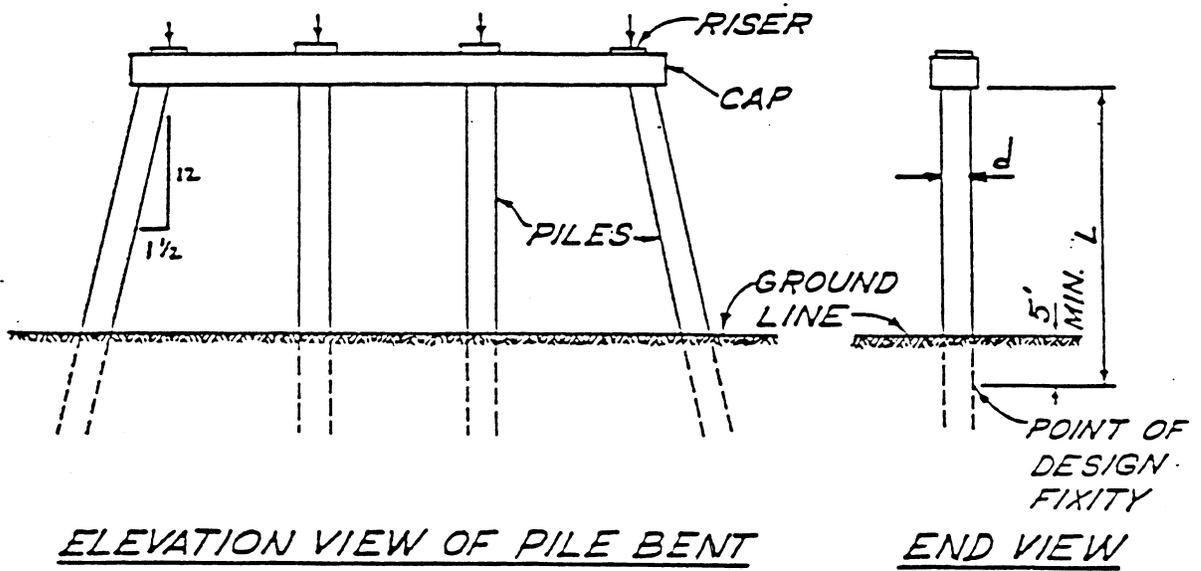


FIGURE 2-4 Typical Trestle Bridge Layout with Pile Bents

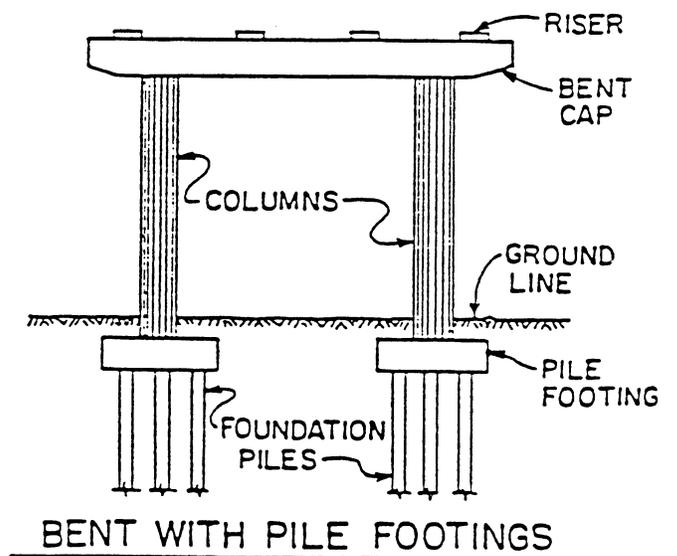
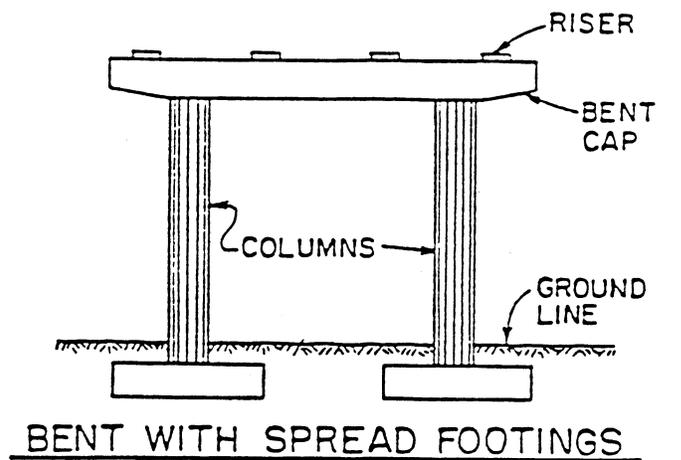
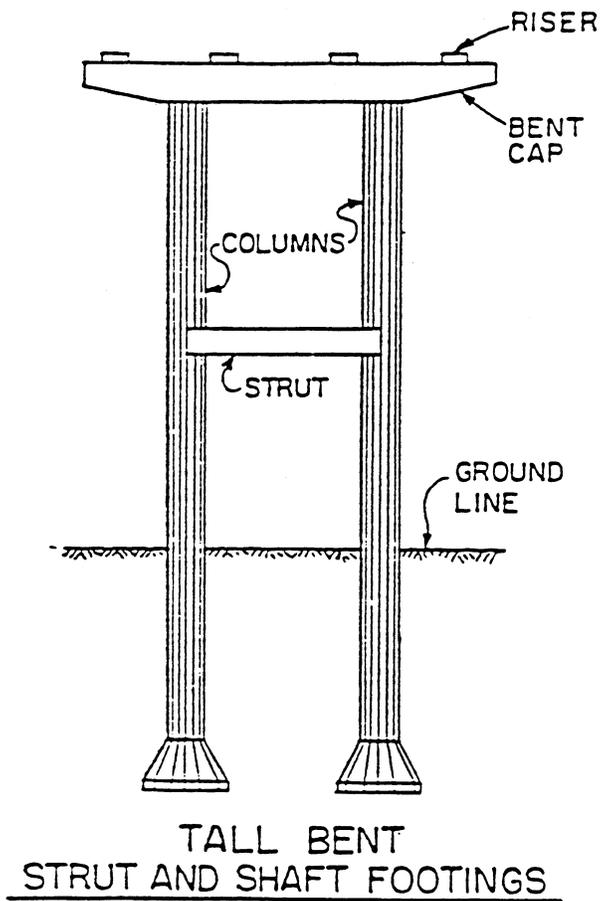


FIGURE 2-5 Typical Column Bent Details

SECTION 3 PILE DESIGN ISSUES IN PILE BENTS

3.1 Pile Batter and Maximum Slenderness Requirements

Description: Pile bents are designed according to the AASHTO Specifications with additional state specific requirements, as described below. Louisiana requires that the exterior piles be battered when the slenderness ratio L/d is over 12, where L is the unsupported pile length measured from the ground line, and d is the least dimension, or diameter of the pile section. The exterior piles are typically battered 1-1/2 on 12. The maximum slenderness ratio L/d is limited to under 20. North Carolina standards require a minimum number of 4 piles for the interior bents (bents between abutments or end bents) and a maximum pile center to center spacing of 10 feet for 12" and 14" concrete piles and 12 feet for 20" concrete piles. The North Carolina standards also specify timber pile detail requirements and provide standard steel pile bent details. Pile batter requirements are shown in figures 4-1 through 4-4.

Advantages: Pile bents are usually supported by at least 4 piles and have a larger degree of redundancy. Vertical multi-pile bents can also allow for some inelastic response, and therefore AASHTO permits a response modification factor of 3 for these systems. The response modification factors are intended to account for redundancy and ductility in structural members. Design forces are obtained by dividing the elastic forces obtained from analysis by the response modification factors.

Disadvantages: The batter of the exterior piles provides stability and good lateral support, but it can reduce the ductility capacity of the bent. Therefore, a lower response modification factor of 2 is recommended by the AASHTO seismic specifications for pile bents with one or more batter piles.

3.2 Pile-Cap Connection Details

Description: Concrete piles are typically required to penetrate into the bent cap a minimum of 9". In caps over 2'-3" deep, North Carolina requires a minimum pile penetration of 12". Pile voids that usually exist in the larger precast prestressed concrete piles (over 20") are required by Louisiana to be poured monolithic with the cap over the embedded length (see figure 4-1). To increase the strength of the pile cap connection, North Carolina standards provide for circular hoops in the cap, around the embedded portion of the piles (see figures 4-6 and 4-7). There are no state standards for positive tension anchor pile connection details indicated for the time frame being considered herein. However, many designs do provide for positive tension pile anchorage and a ductile connection to the cap through the use of a steel cage in the pile void, that extends into the cap (see figure 4-5). Representative pile-cap connection details are shown in figures 4-1 through 4-9.

Advantages: The use of a steel cage in the pile voids that extends into the cap can provide for reliable pile anchorage for tension forces and for some ductility capacity. Additional reinforcement in the cap around the embedded portion of the pile increases the local strength of the cap near the pile and improves the capacity and ductility of the pile-cap connection.

Disadvantages: In most cases, the pile connection to the bent cap has very little bending and pull out capacity and almost no ductility. Seismic damage is likely to occur during larger earthquake loading in the connection area. Better connection details are needed to improve strength and ductility, but the cost of providing such details can be high. However, for SPC A a ductile moment connection of the pile to the cap may not be needed, if properly accounted for in design.

SECTION 4
BENT CAP DESIGN AND DETAILING ISSUES IN PILE BENTS

4.1 Cap Dimensions

Description: Rectangular cast-in-place reinforced concrete pile bent caps are most common. The minimum bent cap depth requirements are generally 2'-6" for single row concrete pile systems and 3'-0" for double row concrete piles. Louisiana bent cap depth requirements vary with the pile size, as shown in table 4-1.

TABLE 4-1 Louisiana Bent Cap Depth Requirements

MINIMUM CAP DEPTH	PILES UNDER 24"	PILES 24" AND OVER
Single Row Bents	2'-0"	2'-3"
Double Row Bents	2'-6"	2'-6"

The minimum bent cap width requirements are given in terms of the pile size. Louisiana requires that the cap be larger than the pile on each side of the cap by 6" for 18" piles or less, and 9" for piles over 18". North Carolina minimum cap width requirements are shown in table 4-2.

TABLE 4-2 North Carolina Bent Cap Width Requirements

MINIMUM CAP WIDTH	12" PILES	20" PILES
Single Row Bents	2'-9"	3'-8"
Double Row Bents	4'-0"	5'-8"

A tolerance of 3" maximum mislocation of piles in the cap from the plan drawing is usually allowed. Saddle cap types are common in North Carolina (see Figure 4-8). The minimum saddle cap section is 3'-9" wide by 2'-3" deep for 12" piles and 5'-4" wide by 3'-0" deep for 20" piles. The width of the bent cap is required to allow a minimum distance of 2 1/2" from the edge of the bearing plate to the side face of the cap for a steel superstructure and a minimum distance of 5 1/2" from the centerline of anchor bolts to the side face of the cap for a

prestressed girder superstructure. The minimum bent cap width is also required to meet the bearing support length requirements of the AASHTO Specifications for Seismic Design, Section 4.9.1 for various span lengths and column heights. The length of the bent cap is set so as to provide a minimum of 9" from the side face of the exterior pile to the end of the cap and a minimum of 9" from the edge or corner of bearing plate to the end of cap for steel superstructures and from the anchor bolts to the end of cap for prestressed girder superstructures. Typical bent cap dimensions are shown in figures 4-1 through 4-8.

Advantages: The wider cap section allows for the bottom corner longitudinal reinforcing bars to be continuous along the cap. It also provides a higher cap flexure capacity and it prevents damage and plastic hinging in the cap near the piles.

4.2 Longitudinal Cap Steel

Description: Both top and bottom longitudinal reinforcement, of equal area, is required in bent caps. The amount of reinforcement is determined based on the AASHTO Specifications. The minimum top and bottom reinforcement required for a rectangular cap in North Carolina is four No. 9 bars (or equivalent) for a cap width of 3'-0" or less, five No. 9 bars (or equivalent) for a cap width greater than 3'-0" but less than or equal to 4'-0", six No. 9 bars (or equivalent) for a cap width greater than 4'-0" but less than or equal to 5'-0", and seven No. 9 bars (or equivalent) for a cap width greater than 5'-0" but less than or equal to 5'-8". The steel bar arrangement in a saddle cap section are shown in Figure 4-8. Representative longitudinal cap steel details are shown in figures 4-1 through 4-10.

Advantages: During seismic loading, load reversal in the cap may occur. Providing top and bottom reinforcement increases the positive and negative moment capacity of the cap and helps prevent damage to the cap. The saddle cap section provides steel in addition to that which is in the main cap section. Also it allows all bottom steel to be continuous along the cap.

4.3 Cap Shear Reinforcement

Description: The longitudinal steel is placed inside closed shear stirrups. The maximum stirrup spacing is 12". In Louisiana, the stirrups adjacent to piles are located at a maximum of 3" from the face of the pile and the first space is under 6". The minimum size of the stirrups is No. 4 bars. Double stirrups are used in all pile bent caps exceeding 2'-6" in width. North Carolina uses No. 4 or No. 5 stirrups placed according to AASHTO Specifications that are made of one U-type stirrup and one tie, both with hooked ends, at each location. Representative cap shear reinforcement details are shown in figures 4-2, 4-3, 4-9 and 4-10.

Advantages: The closed stirrups provide good confinement to the longitudinal steel and increase the cap ductility and torsional capacity. The closely spaced stirrups in the cap near the piles increase the local cap capacity near the pile locations. The U-shaped stirrups with hooked ends topped by a straight bar with hooked ends used in North Carolina allows for easier construction, and approaches a closed stirrup confinement effect.

Disadvantages: The closed stirrup arrangement makes it harder to place the longitudinal reinforcement and may increase the construction costs. A reinforcing steel cage assembled on site and set in place on the pile bent with all the cap reinforcement in is usually used.

4.4 Other Cap Reinforcement


Description: In North Carolina, additional reinforcement is required to be placed in the pile cap connection area. Four No. 4 longitudinal bars are required to be placed at equal spaces above each row of piles with No. 4 bars at about 4'-0" placed transversely to the cap (see figure 4-6). Two No. 4 circular hoops around each pile in single row systems and three No. 4 rectangular hoops around piles in double row systems are also required (see figures 4-6 and 4-7). In addition, for interior bents it is required that enough extra U-shaped stirrups be placed in top of cap so that there will be No. 4 bars at 6-inch centers under bearing areas of each beam or girder (see figures 4-9 and 4-10). Also, No. 9 U-shaped bars are required to be placed at the ends of caps for 16" and larger piles (see figure 4-9).

Representative cap reinforcement details used in addition to the longitudinal and transverse bars are shown in figures 4-6 through 4-10.


Advantages: The additional reinforcement around the embedded portion of the piles improves the strength and the ductility of the cap at the pile-cap connection and reduces the potential for localized seismic damage in the cap.

Disadvantages: These additional reinforcement details may increase the construction costs of bridges in SPC A.

NOTE:
 EXTERIOR PILES SHALL TYPICALLY BE
 DATTERED 1/2 ON 12

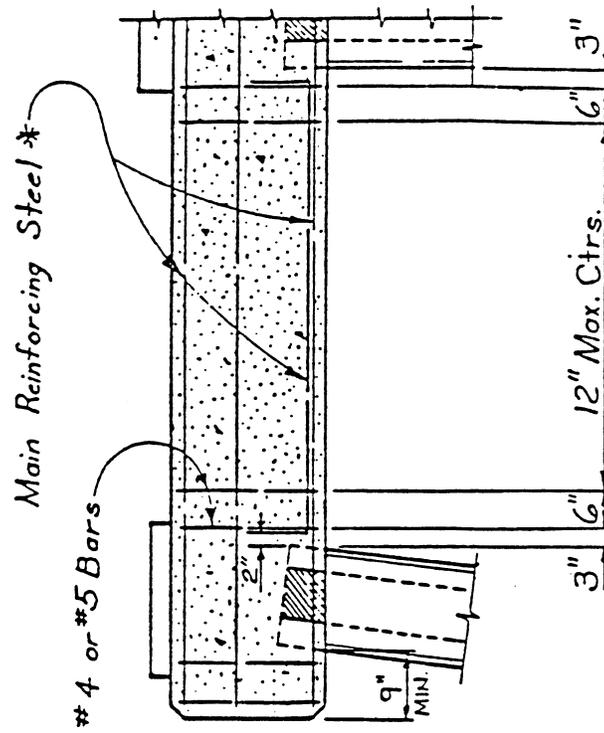


ELEVATION

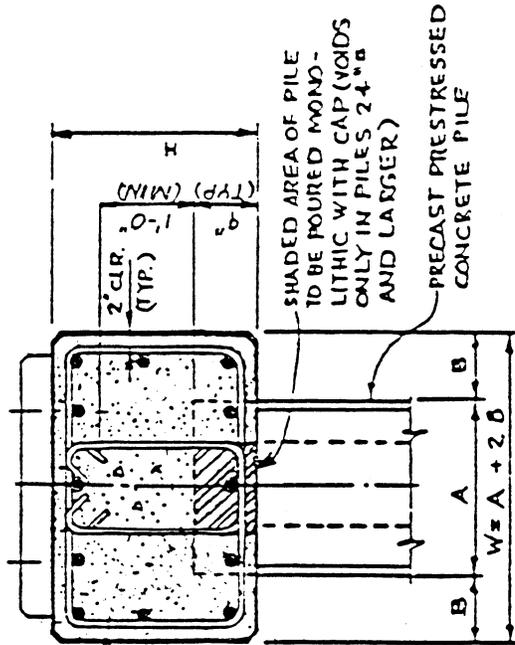


**TYPICAL SECTION OF
 SINGLE ROW PILE BENT**


FIGURE 4-1 Louisiana Typical Single Row Pile Bent Details

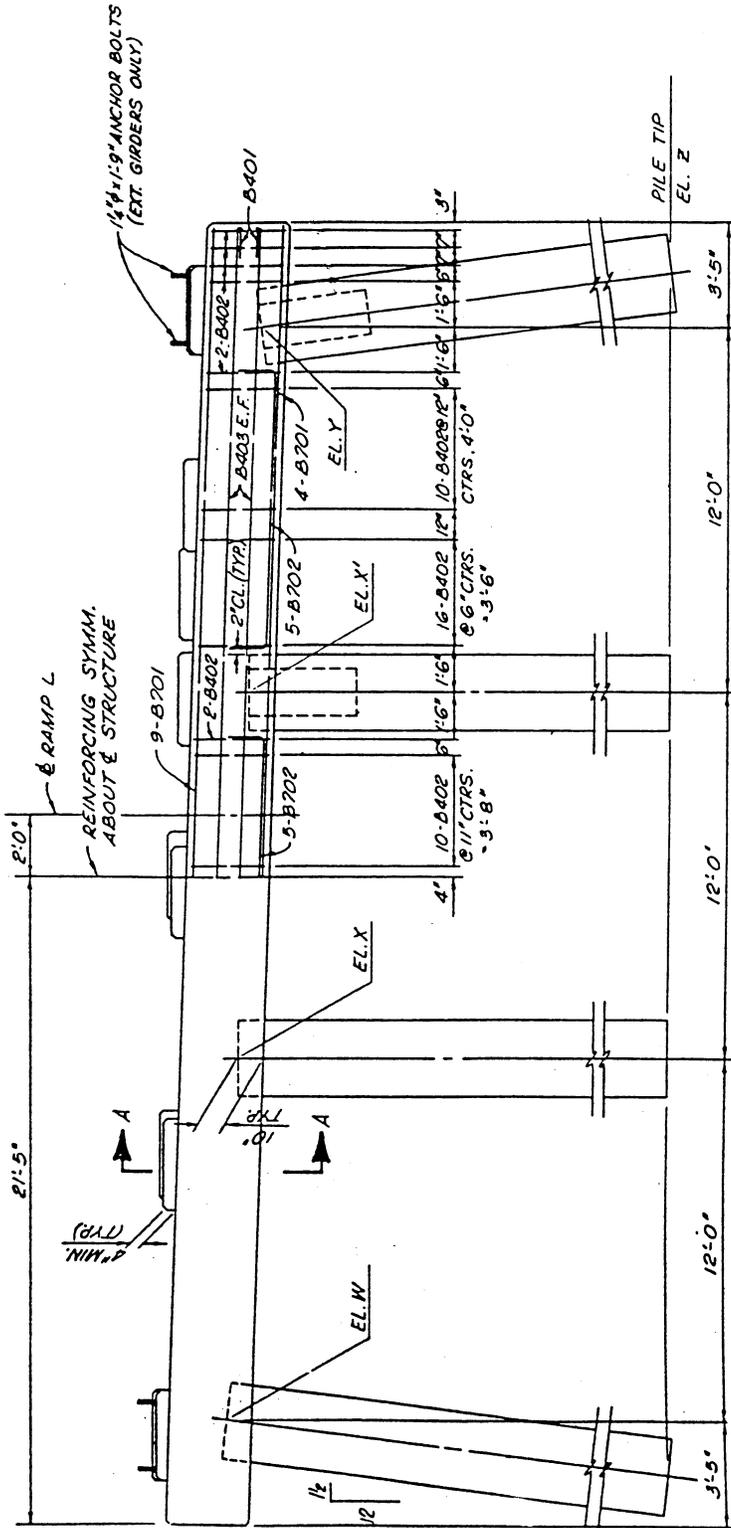

ELEVATION

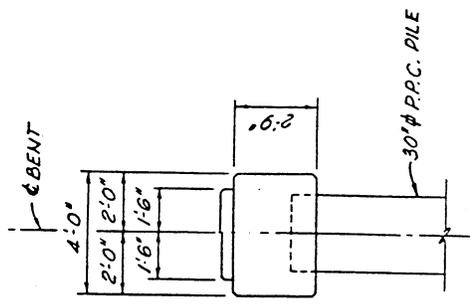


END ELEVATION

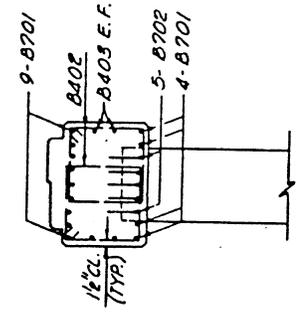


SECTION A-A

FIGURE 4-2 Single Row Pile Bent Reinforcing Details

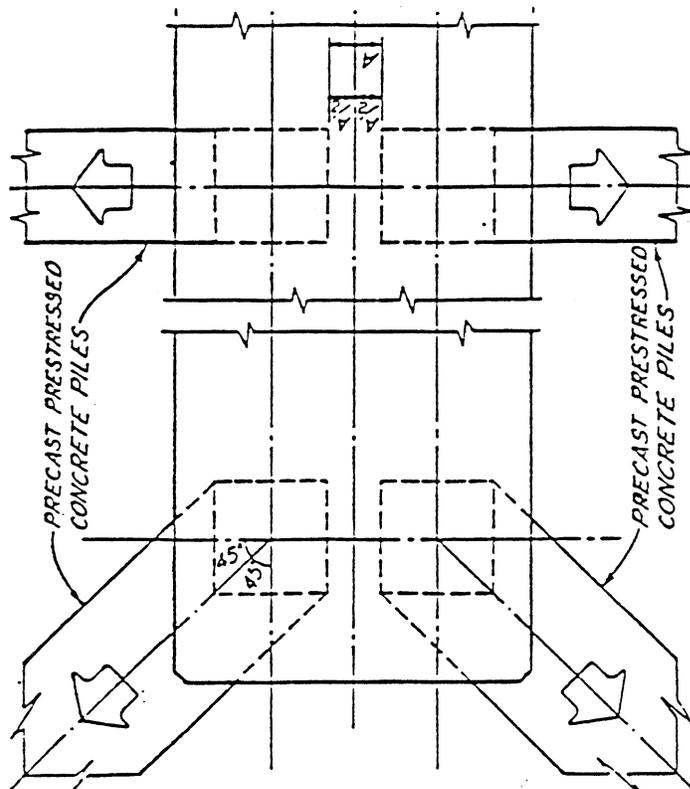


PART PLAN
SHOWING INTERIOR PILE AND
EXTERIOR PILE BATTER

NOTE:
EXTERIOR PILE BATTER IS COMPUTED
AS A RESULTANT OF 1/2 IN 12 BATTER
IN BOTH DIRECTIONS ON PILE.

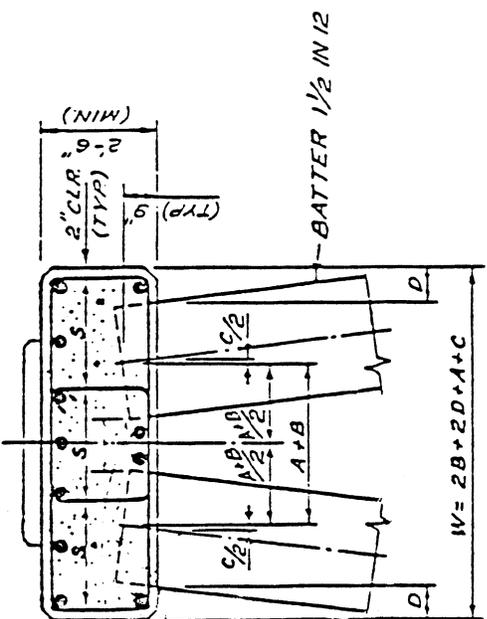

TYPICAL SECTION
OF DOUBLE ROW PILE BENT

FIGURE 4-3 Louisiana Typical Double Row Pile Bent Details

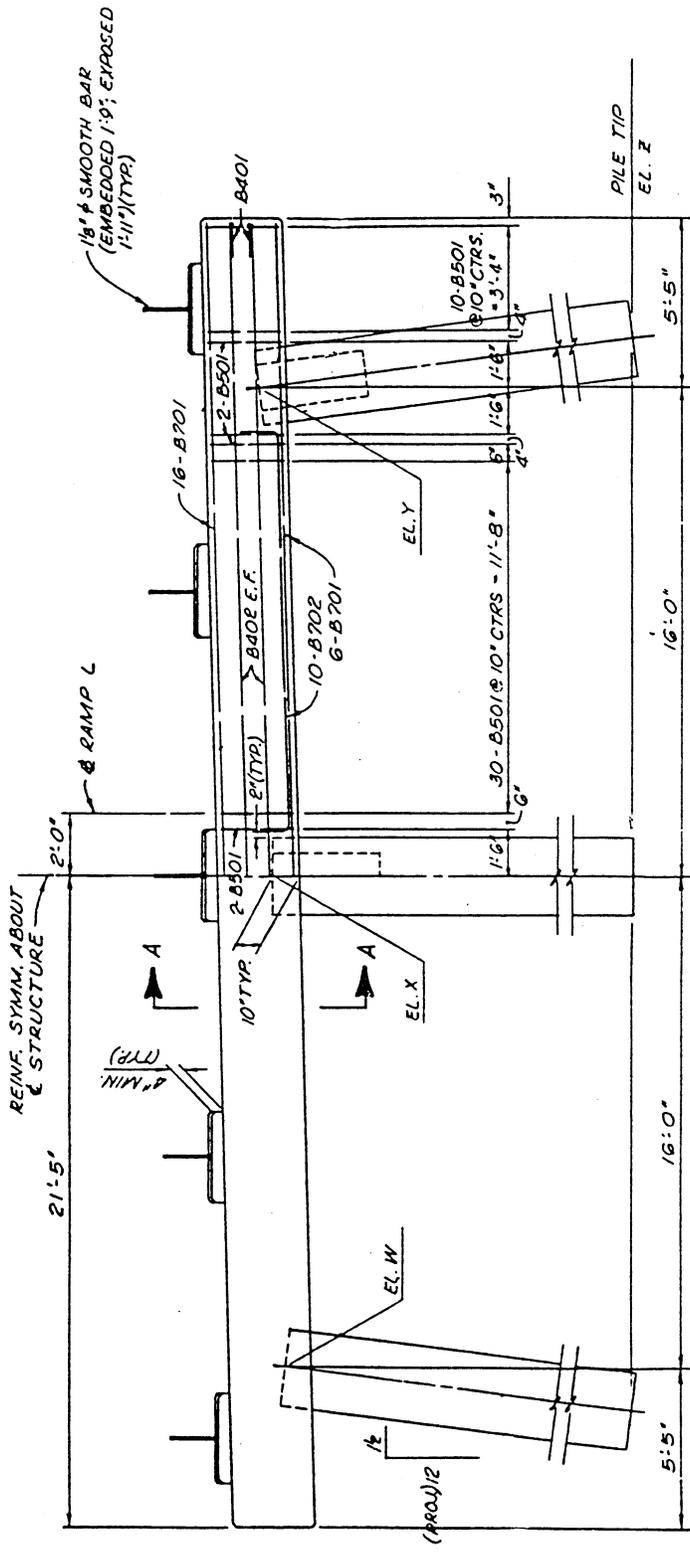

ELEVATION



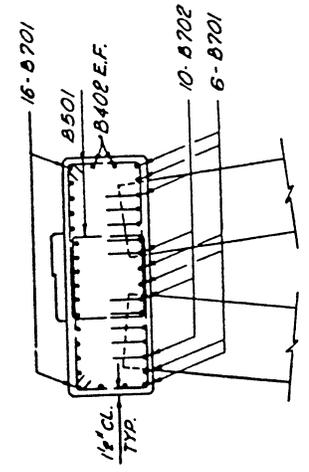



FIGURE 4-4 Double Row Pile Bent Reinforcing Details

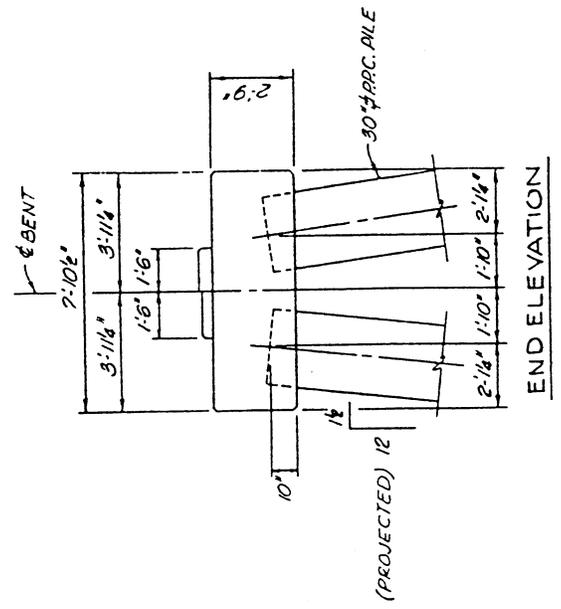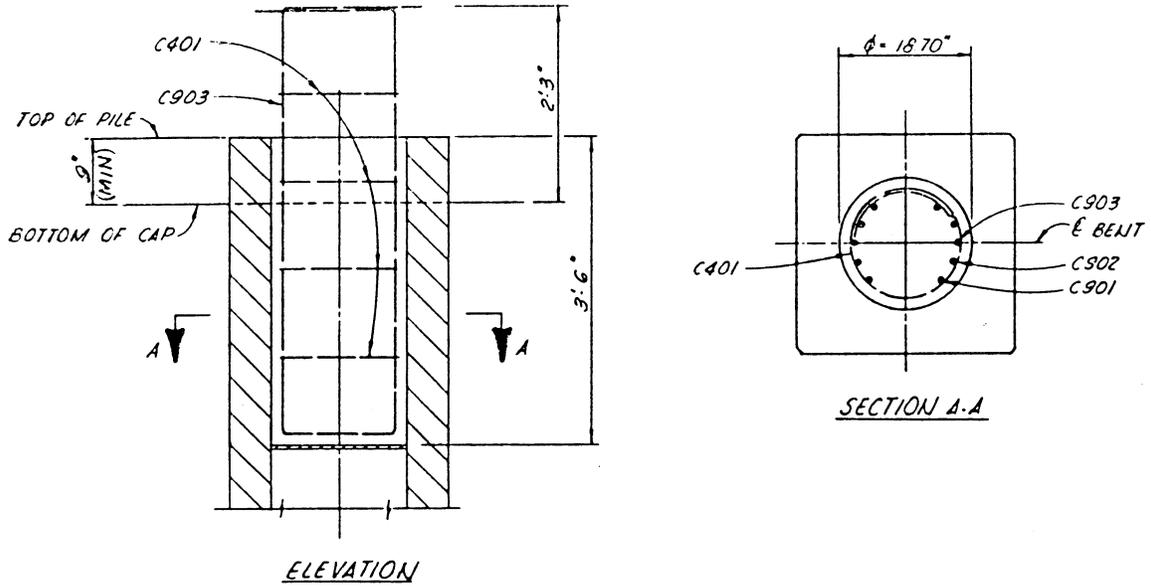

30" ϕ P.P.C. PILE PLUG DETAIL

FIGURE 4-5 Louisiana Pile Plug Details

NOTE: DIMENSIONS ARE BASED ON PILE SIZE REGARDLESS OF TYPE OF PILE.

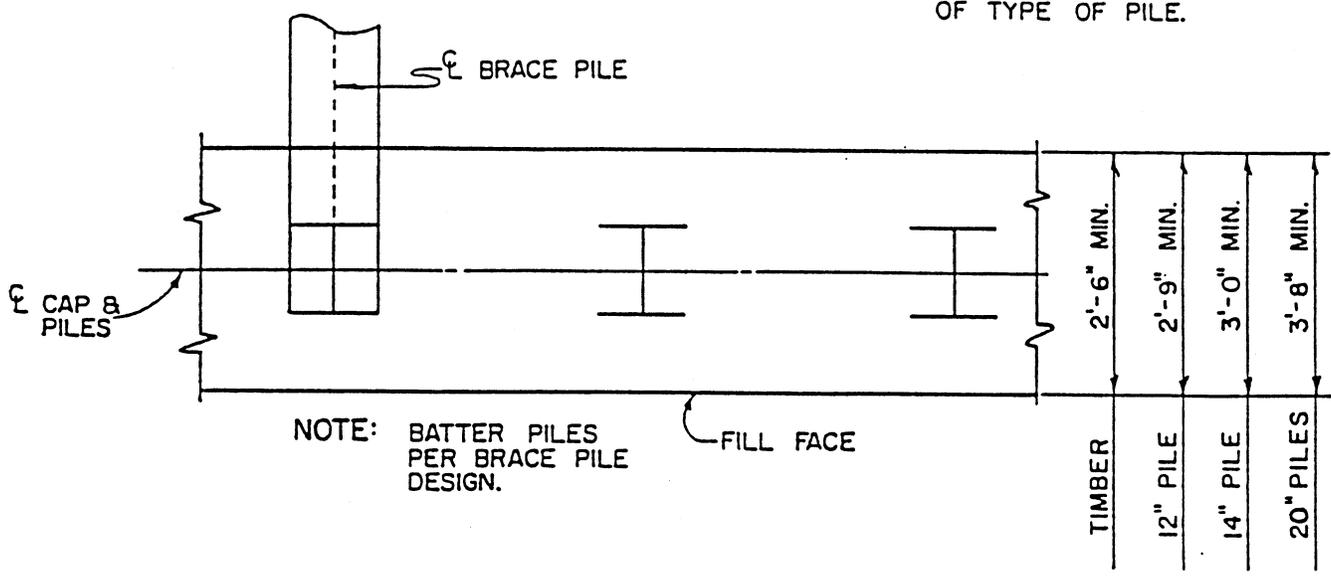

NOTE: BATTER PILES PER BRACE PILE DESIGN.


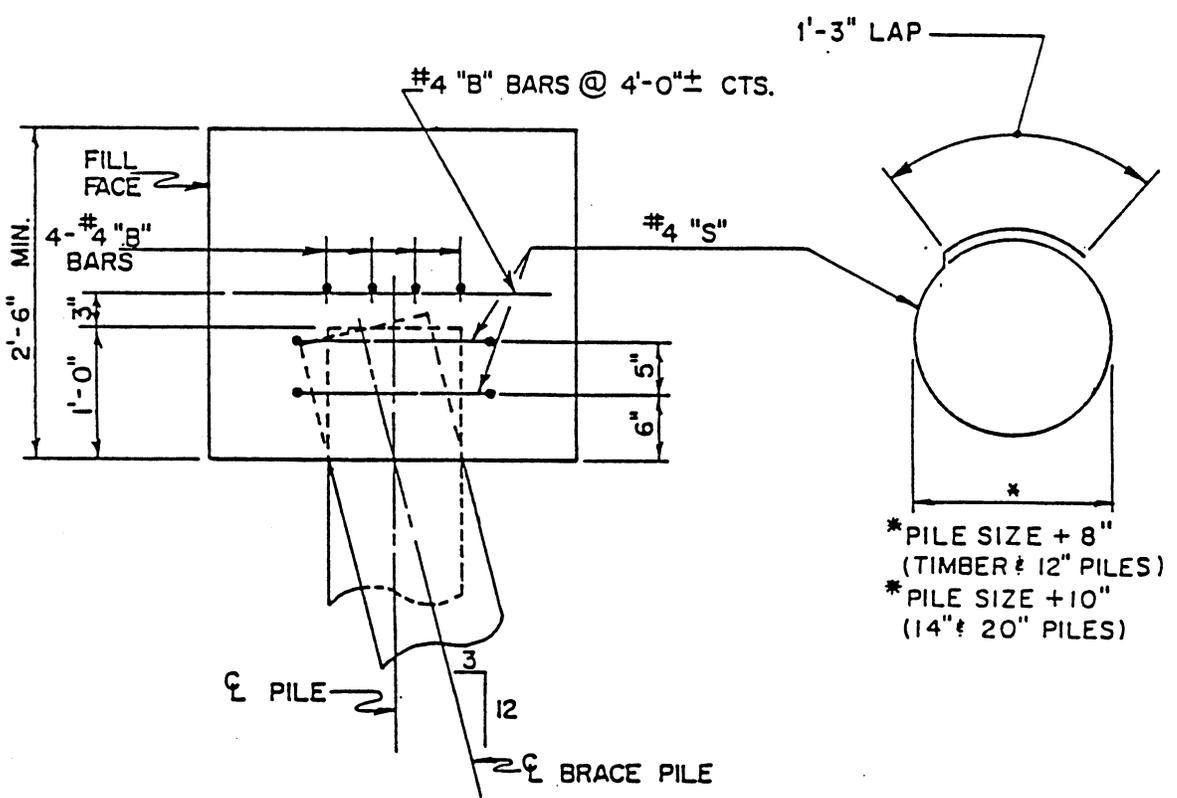


FIGURE 4-6 North Carolina Typical Single Row Pile Bent Details

NOTE : DIMENSIONS ARE BASED ON PILE SIZE REGARDLESS OF TYPE OF PILE.

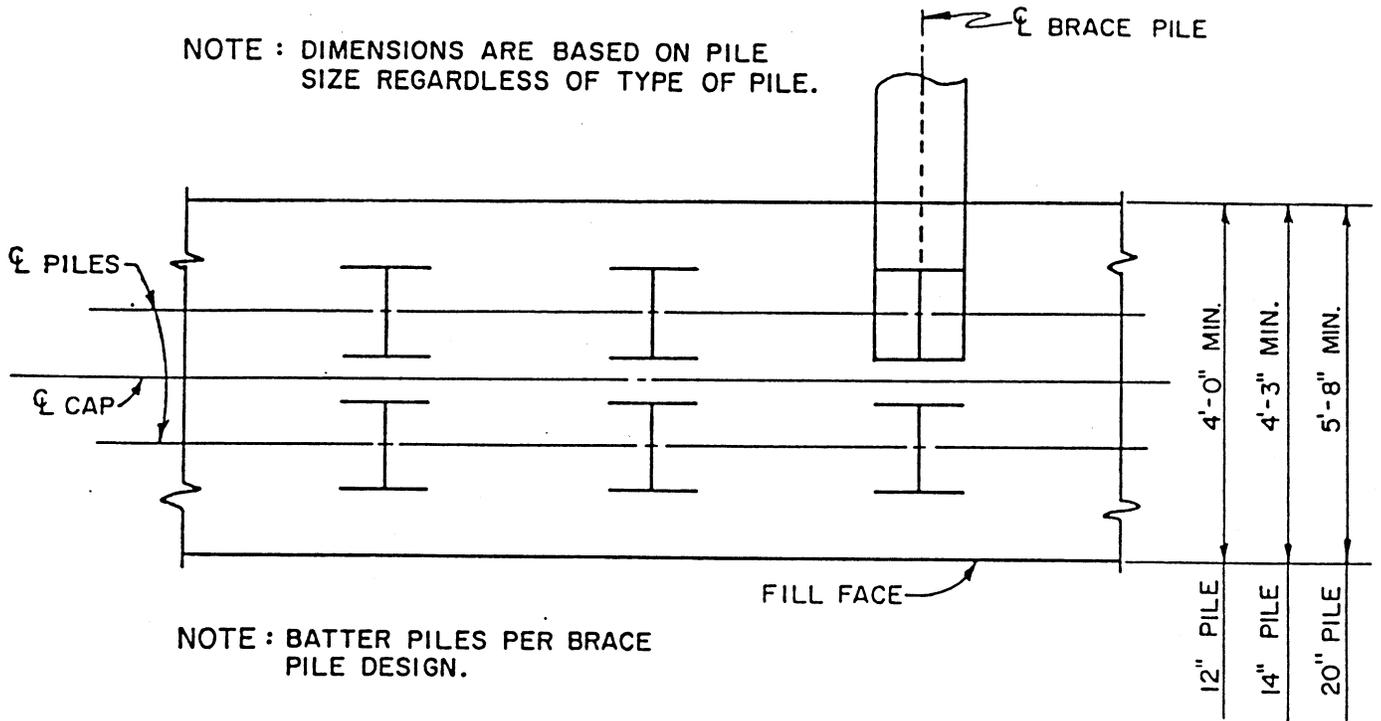

NOTE : BATTER PILES PER BRACE PILE DESIGN.

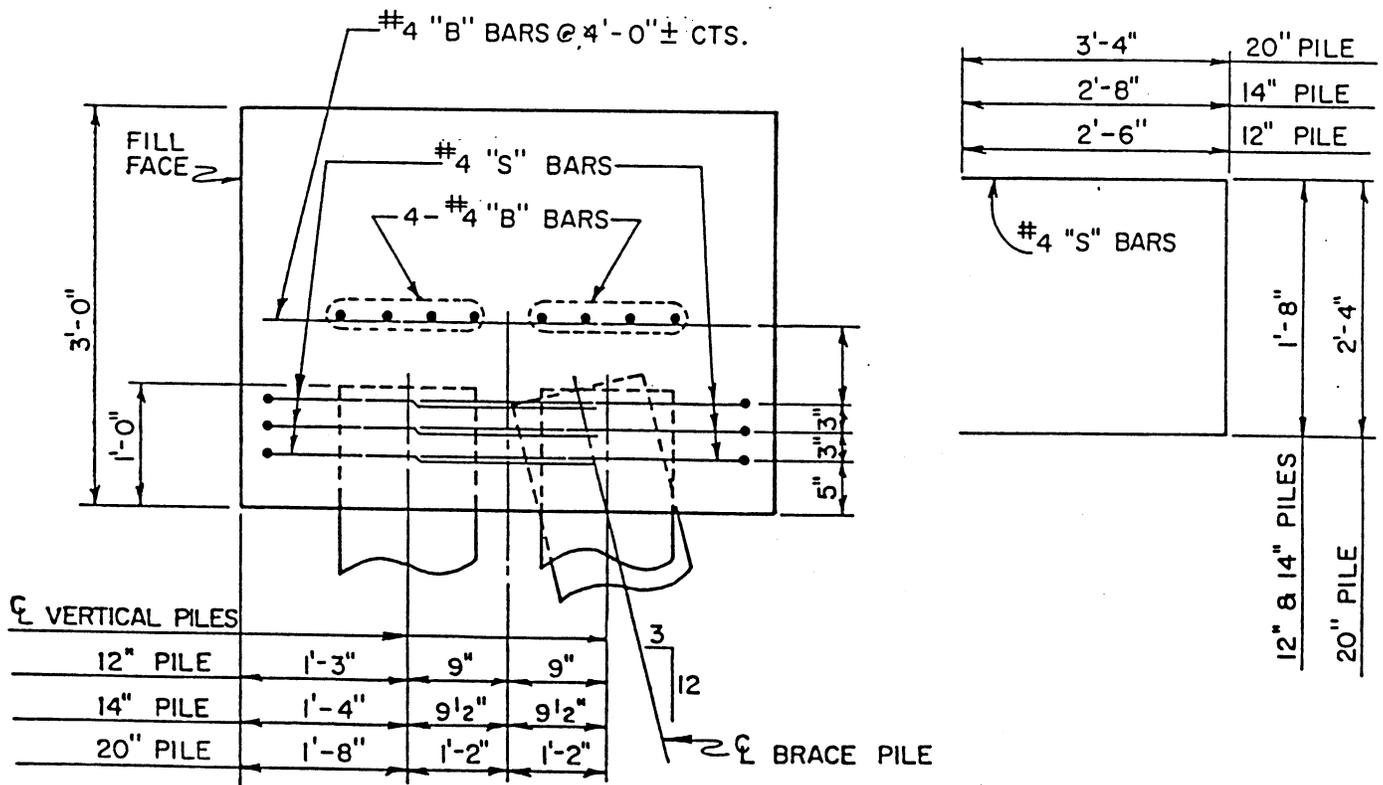


FIGURE 4-7 North Carolina Typical Double Row Pile Bent Details


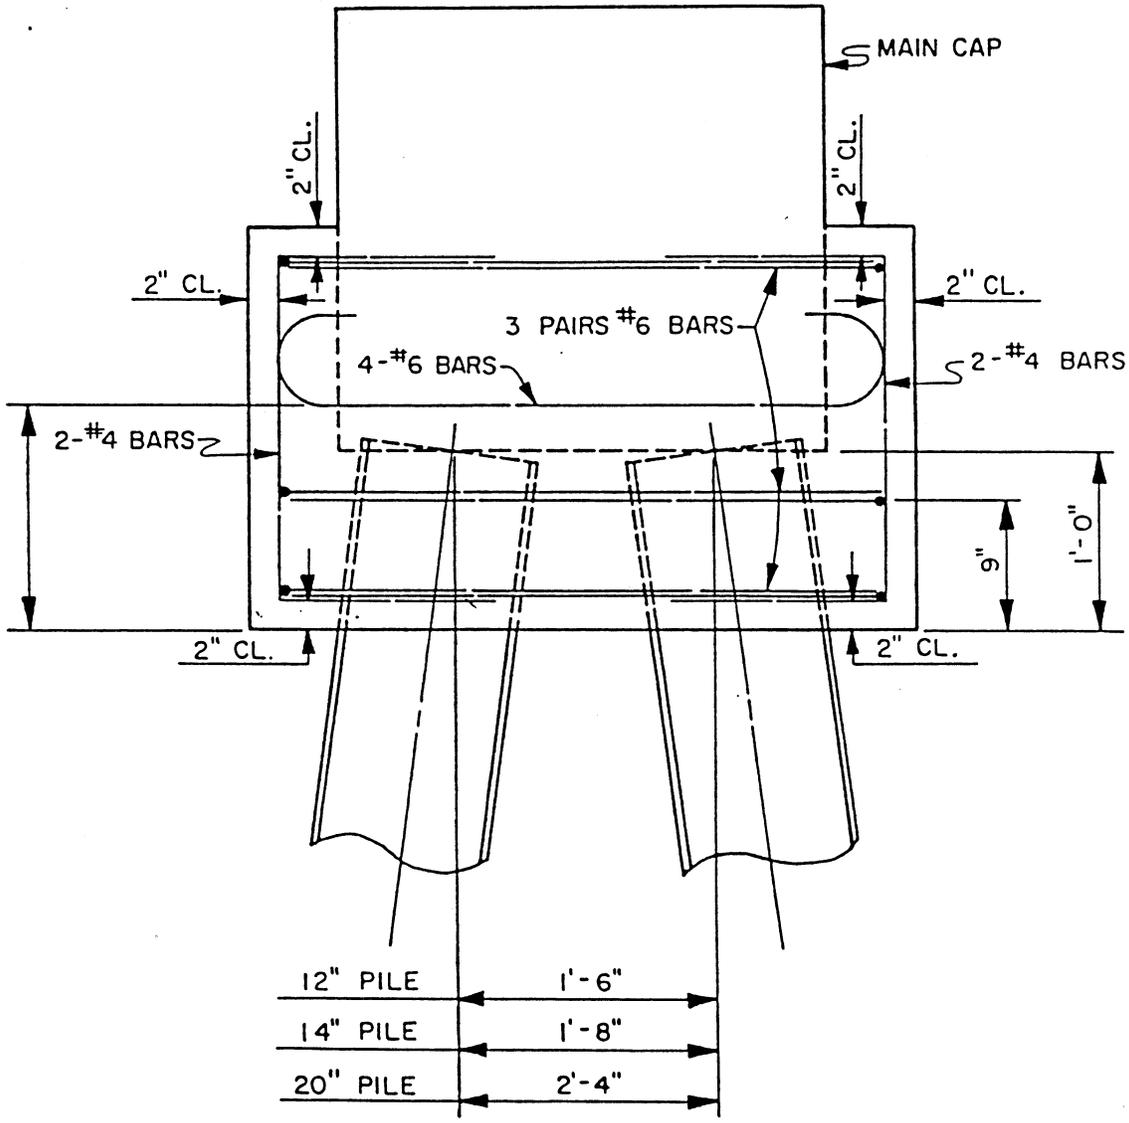


FIGURE 4-8 North Carolina Saddle Cap Details

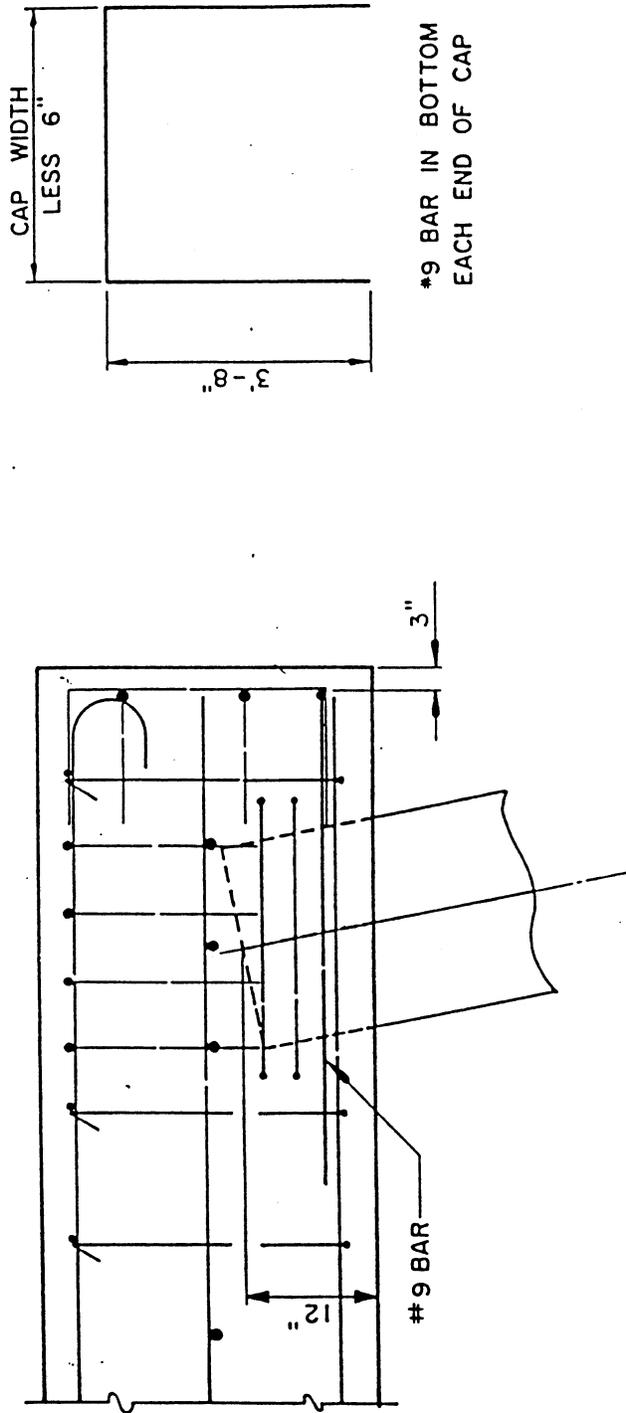

9 BAR TO BE USED AS SHOWN ABOVE FOR ALL PROJECTS WHERE CONCRETE PILES 16" OR LARGER ARE USED.

FOR OTHER PILE CAPS, HOOK MAIN BARS TOP AND BOTTOM OF CAP, BUT OMIT THE #9 U-SHAPED BAR SHOWN ABOVE.

DETAIL SHOWN IS FOR SINGLE ROW OF PILES.

FIGURE 4-9 North Carolina Interior Bent Pile-Cap Connection Details

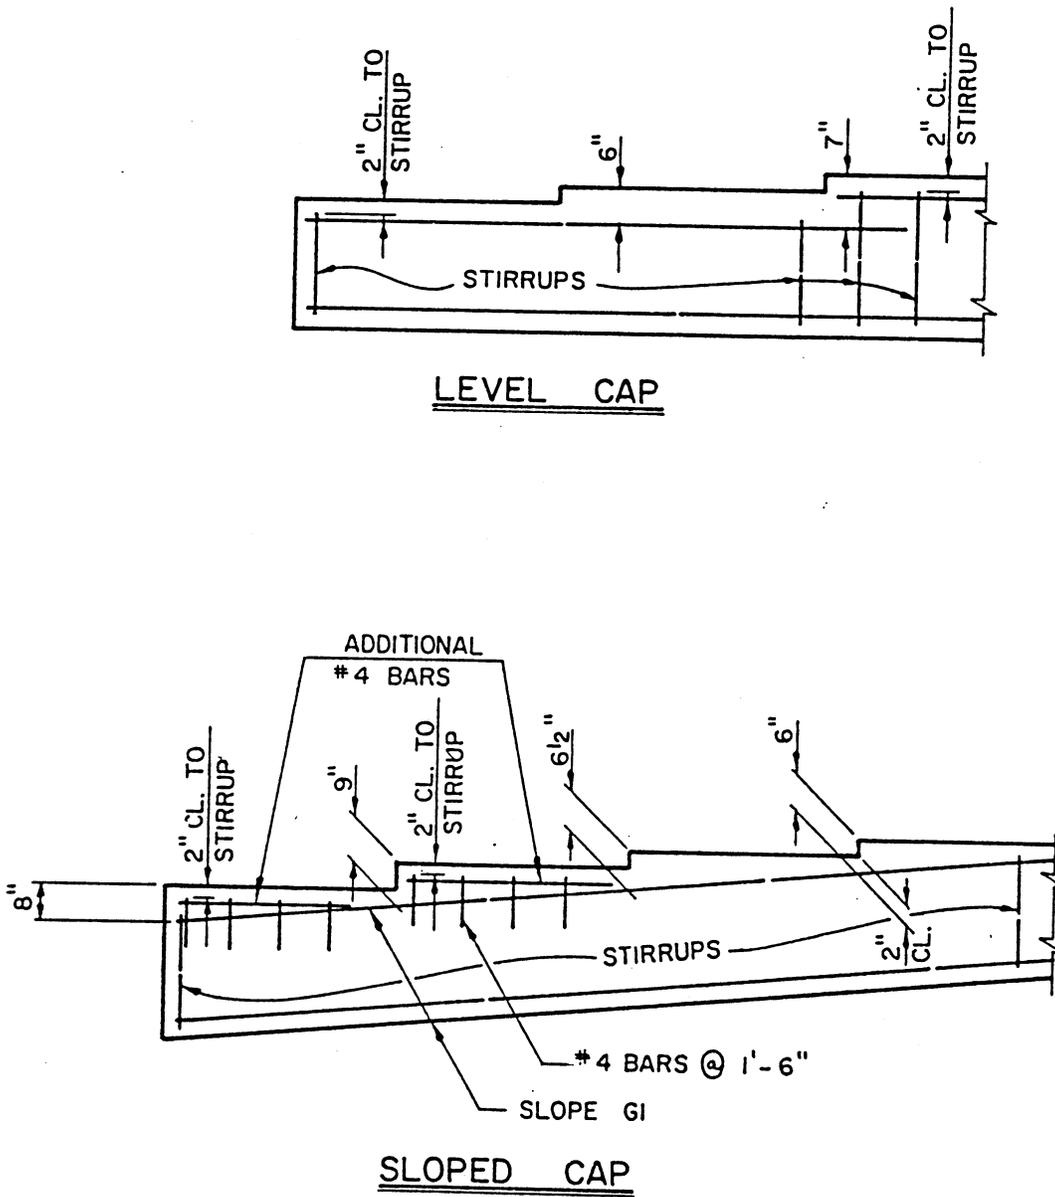


FIGURE 4-10 North Carolina Stepped Bent Cap Reinforcing Details

SECTION 5 COLUMN AND PIER DESIGN AND DETAILING ISSUES

5.1 Column Dimensions

Description: Column bents with circular columns are most common (see figure 5-1). The minimum diameter required for a circular column is usually over 30". North Carolina limits the minimum column diameter to 36". Most of the quantitative requirements below are based on North Carolina practice. Other state requirements were similar, but not as specific. For larger columns, the diameter is increased in 6" increments. When the cap width exceeds 3'-6" a minimum column diameter of over 36" is usually required. The ratio of the unsupported column length to the least column width (L/d) is generally kept under 10. Intermediate column struts are 2'-6" wide by 2'-9" deep for 36" diameter piles. For larger columns the strut size is increased accordingly. Rectangular columns of varying cross section are also common (see figure 5-2). The dimensions of rectangular columns are usually increased towards the foundation level (see figure 5-2), but sometimes they are decreased towards the base (see figure 5-3a). The overhang from the end of cap to the face of column does not exceed 4'-0" and is not less than 3'-0". In some cases column of different heights are used in the same bent (see figure 5-4a). The requirements for minimum column sizes along with other design requirements result in relatively low axial stress values. The average axial stress ratio $P/f_c A_g$, significantly affects seismic capacity in terms of flexural overstrength, shear strength and ductile behavior. Representative column bent geometries and dimensions are shown in figures 5-1 through 5-13.

Advantages: Reducing the dimensions of rectangular columns towards the base reduces the loads transmitted to the footing and the potential of seismic damage in the footing. Square columns allow for an easier placement of the cap reinforcing bars.

Disadvantages: Providing minimum requirements for column dimensions and increasing the cross section of rectangular columns towards the base ensures strength and stability but may force plastic hinging to occur in the cap or the foundation structure first, which is undesirable. Using different column heights in the same bent results in nonuniform seismic load distribution and is undesirable and should be avoided where practical. The shorter columns will attract more load and may fail before plastic hinging can occur in the other columns.

5.2 Column Vertical Reinforcement

Description: Column longitudinal steel requirements generally follow the AASHTO Specifications guidelines. In Louisiana columns are usually designed as tied columns even if spiral steel is used. In North Carolina, columns on spread footings are designed for a column height that is 3'-0" longer than the actual height. The area of the longitudinal

reinforcement is usually kept between 0.01 to 0.06 of the gross cross-section area of the column, which satisfies the SPC C vertical reinforcement requirement. In North Carolina, the minimum longitudinal bar sizes for 36" diameter columns are 8 No. 10 bars for columns under 19'-11", 8 No. 11 bars for columns 20'-0" and over with additional No. 11 bars added in columns over 45'-0", as per design requirements. In Pennsylvania and New York, the flexural strength of bridge columns in SPC B is determined based on the AASHTO Seismic Specification 8.4.1(B), that applies to SPC C. This provision reduces the strength reduction factor to 0.50 for both spiral and tied columns with high axial stresses (over $0.20f'_c$). This requirement was introduced to account for the lower ductility capacity of columns with high axial loads. Representative column vertical reinforcement details are shown in figures 5-1 through 5-5.

Advantages: Providing longitudinal reinforcement as per AASHTO Seismic Specification 8.4.1(B and C) that applies to SPC C to bridges in SPC B, ensures good ductility capacity and maximizes earthquake resistance.

Disadvantages: The additional reinforcement adds, albeit minimally, to the construction costs in SPC B.

5.3 Column Transverse Reinforcement

Description: The transverse column reinforcement design and detailing in bridges in SPC A follows the AASHTO Standard Specification guidelines. In addition, in Louisiana, circular columns are required to have No. 3 spiral steel at 6" pitch, and are designed as tied columns. Closed ties are used in square columns. In other states such as Pennsylvania, the use of spiral reinforcement is not as common. The spiral reinforcement described above does not meet requirements for seismic reinforcement of plastic hinge zones for SPC C or D.

Bridge columns in SPC B are designed based on AASHTO and additional, state specific, seismic design and detailing requirements. The additional requirements are often more stringent than the AASHTO Seismic Specification 8.3 for SPC B which only pertains to the amount and spacing of transverse reinforcement for confinement at plastic hinges.

Pennsylvania and New York requirements for SPC B are actually very similar to the AASHTO seismic requirements for SPC C of Sec. 8.4.1(D, E and F), as shown in figure 5-6. Sec. 8.4.1(D) pertains to the column shear capacity and was introduced to account for the reduced contribution of the concrete to the column shear capacity within the plastic hinge zone at low axial load levels, and to minimize the potential for column shear failure. Sec. 8.4.1(E) pertains to the ability of the transverse reinforcement in the expected plastic hinge regions to provide adequate confinement and prevent buckling of the longitudinal reinforcement. It defines minimum transverse steel volumetric ratios for spiral and rectangular stirrup reinforcement.

Sec. 8.4.1(F) specifies maximum spacing and extent of transverse reinforcement for confinement. The maximum spacing limit in Sec. 8.4.1(F) is the lesser of 4" or one-quarter of the minimum column dimension, but both Pennsylvania and New York allow a maximum spacing of 6". The transverse confinement reinforcement is required to extend over a length from each column end not less than the maximum cross-sectional column dimension or one-sixth of the clear height of the column, but not less than 18". Lapping of spiral reinforcement in the transverse confinement regions is not permitted. Connection of spiral reinforcement in this region must be full yield strength lap length. Similarly, rectangular stirrups must be adequately anchored by bending ends back into the core at least 135 degrees, with a minimum extension of 10 bar diameters. Transverse reinforcement outside the plastic hinge regions is provided as per AASHTO Standard Specifications.

North Carolina transverse reinforcement requirements for SPC B follow the AASHTO Seismic Specification 8.3, with the additional detailing requirements shown in figure 5-7. All round columns are required to have No. 4 spiral steel with spacing between spirals set at 3-inch centers for the whole length of the column. The splice of the spiral column reinforcement is lapped 24". Representative column transverse reinforcement details are shown in figures 5-6 through 5-9.

Advantages: Using spiral reinforcement in all circular columns, even spiral reinforcement that does not satisfy the requirements for pitch applicable to the plastic hinge zones in SPC C and D, improves the confinement of the main longitudinal steel somewhat due to the hoop stress action. Good confinement of the longitudinal steel, especially in plastic hinge areas, adds significantly to the ductility capacity of the columns and minimizes the susceptibility to damage from earthquakes. Keeping the spiral spacing constant for the entire column length simplifies construction. Closed ties are used in square columns. Square columns allow for an easier placement of the cap reinforcing bars.

Disadvantages: Providing the additional transverse reinforcing steel requirements in the plastic hinge areas and keeping the spiral pitch constant along the column length adds to the amount of steel required.

Historical: During the 1971 San Fernando and the 1989 Loma Prieta earthquakes many bridge columns failed due to a lack of confinement. Following the 1971 San Fernando earthquake, column detailing requirements have been changed to ensure adequate confinement, and after the 1989 Loma Prieta earthquake many states in the eastern U.S. have added to the transverse reinforcement requirements for SPC B. Bridges in SPC B designed prior to the current seismic requirements do not have adequate transverse reinforcement in the plastic hinge regions, but if the axial stress ratio is low ($P/f'_c A_g < 0.1$) research by Mander et al. (1993) has shown that the performance should be satisfactory.

5.4 Column Reinforcement Splices

Description: For bridges in SPC A there are no restrictions regarding the type and location of splices in column longitudinal reinforcement beyond those of the AASHTO Standard Specifications. Column reinforcement is usually lapped with dowels at the column base. Also, the AASHTO Seismic Specifications do not have any special requirements for column reinforcement splices for SPC B, but Pennsylvania and New York require that the location of the splices be limited to the center half of the column, as per AASHTO Seismic Specification 8.4.1(F) for SPC C. New York also requires that dowels from the footing extend at least 1/4 of the column height or 10 feet (see figure 5-5) and that splices in the vertical reinforcement be staggered whenever possible. North Carolina has no restrictions on lap splices for SPC B. Representative column reinforcement splice details are shown in figures 5-3a, 5-4a, 5-5 and 5-8.

Advantages: Restricting the location of lap splices away from plastic hinge regions prevents potential failure due to loss of concrete cover as a result of spalling.

Disadvantages: Splicing the longitudinal steel in the center of the column or using continuous unspliced column bars from the footing into the bent cap makes the construction more difficult.

Historical: Splicing the longitudinal reinforcement with dowels cast in the footing at the column base and the loss of bond during seismic shaking is believed to have been the main cause of failure of one of the bridges of the Golden-State-Foothills freeway interchange in the 1971 San Fernando earthquake. In most of the existing bridges in the states studied, which were designed prior to the current seismic requirements, column reinforcement is lap spliced to the footing dowels near the base of the column, which is a plastic hinge region (see figures 5-3a and 5-4a). In New York and Pennsylvania, this practice has been changed. For frame pier bents, however, lap splices at the column base may have adequate structure ductility due to redistribution of moments among the hinges within the frame.

5.5 Extension of Column Reinforcement into Bent Caps and Footings

Description: Vertical reinforcement is required to extend into bent caps for full development length. Pennsylvania requires that longitudinal reinforcement be developed for its overstrength capacity of $1.25f_y$ in SPC B columns, as per AASHTO Seismic Specification 8.4.3 for SPC C.

For SPC B Pennsylvania and New York require that column transverse reinforcement for confinement be continued into the adjoining member for a distance of at least 15" or one half the maximum column dimension (see figure 5-6), as per AASHTO Seismic Specification

8.4.3. The spacing of the reinforcement is usually kept the same as that required in the plastic hinge region. In North Carolina column connections for SPC B are detailed with No. 4 ties at 3-inch centers for a minimum of one-half the column diameter into the cap and footings (see figure 5-8). In Louisiana a minimum of four ties are continued into the footing. Extension of column reinforcement requirements in bent caps and footings are illustrated in figures 5-6 through 5-8.

Advantages: Continuing the column reinforcement into the adjoining members prevents a plane of weakness at the interface, confines the longitudinal steel beyond the face of the column and ensures joint ductility.

Disadvantages: The additional steel needed in the bent cap and footing near the column connection makes the construction more difficult.

Historical: The 1971 San Fernando earthquake when column reinforcement pulled out of footings, has pointed out the importance of continuing the transverse reinforcement into the footing. In the past the transverse reinforcement was stopped at the face of the column connection to the bent cap and the footing. Therefore, many of the existing bridge columns in SPC A and B lack proper transverse reinforcement extension details into footings and column bents (see figures 5-3, 5-12 and 6-4). Vertical bars in columns were often required to extend into cap beams a minimum of 20 bar diameters.

5.6 Column Reinforcing Details at Struts

Description: Struts are sometimes provided in high column bents to reduce the slenderness ratio and pile loading in the transverse direction. There are no specific design and detailing requirements for the column strut connection. A typical spiral column reinforcing detail at a strut joint is shown in figure 5-9. The longitudinal column reinforcement is continuous, and its confinement is also continued in the strut region. A construction joint in the column is usually permitted above the strut level. The strut reinforcement is anchored into the column.

Advantages: The column strut connection reinforcing details usually used allow for ease of construction and, depending on the design criteria used, can be adequate for SPC A and B. The smaller strut cross section and its lighter reinforcement ensures that damage during larger seismic loading occurs in the strut first.

Disadvantages: Since the strut reinforcement is not continuous through the column strut joint and the longitudinal reinforcement is lap spliced right above the strut the column strut connection can not be regarded as a moment resistant ductile joint, and it can not be expected to perform well during severe seismic shaking.

5.7 Pier Wall Design and Reinforcement Details

Description: Piers supporting bridges over railways and located within 25 feet of the centerline of railroad track are required by AREA Specifications to be protected by a reinforced concrete crash wall extending to not less than 6 feet above the top of the rail. When two or more light columns compose a pier, a wall at least 2 feet thick connects the columns. The face of the crash wall extends a distance of at least six inches beyond the face of the column on the side adjacent to the track, and is anchored to the column and footing with steel reinforcement (see figure 5-10). Pier walls used at stream crossings to prevent the accumulation of debris usually have rounded ends and extend at least one foot above design flood elevation.

AASHTO Seismic Specification 8.4.1 requires that a vertical support be designed as a column if the ratio of the clear height to the maximum plan dimensions of the support is equal to or greater than 2.5, and as a pier if this ratio is under 2.5. A pier may be designed as a wall in its strong direction and a column in its weak direction. Wall type piers have low ductility capacity and redundancy in their strong direction and are therefore assigned an R-Factor of 2. There are no special seismic requirements for pier walls in SPC A. For SPC B bridges, Pennsylvania has adopted the requirements of AASHTO Seismic Specification 8.4.2 (for SPC C) for the design of pier walls. Sec. 8.4.2 requires a minimum reinforcement ratio of 0.0025 both horizontally and vertically. The maximum reinforcement spacing either horizontally or vertically is 18", and the shear reinforcement is required to be continuous and uniformly distributed. Representative pier wall reinforcement details are shown in figures 5-10 through 5-13.

Advantages: Providing minimum requirements for horizontal and vertical reinforcement and confining ties increases the strength and the ductility of the wall. The ties usually have a 135 degree hook at one end and a 90 degree hook at the other end, so that placing of the tie would be easier. They are alternately placed on each row of main longitudinal reinforcement to optimize confinement. Using partial height walls reduces the construction costs.

Disadvantages: It is very hard to predict the response of partial height walls during strong seismic shaking. Walls are very stiff in their strong direction and attract large forces towards the connecting columns. Plastic hinging can occur in the columns near the top of the partial height wall. The shorter columns in the partial height wall will also attract larger seismic loads. A bent with a partial height wall can receive significantly higher seismic forces than the other bents that do not have a partial height wall.

Historical: The performance of partial height walls during past earthquakes (especially during the 1994 Northridge earthquake) has been very poor.

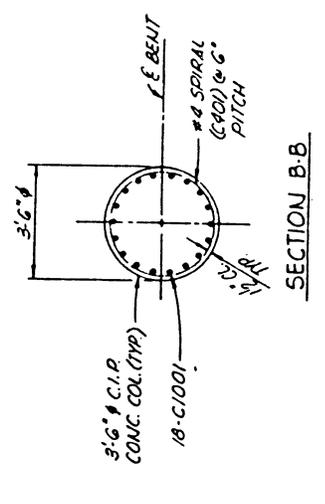
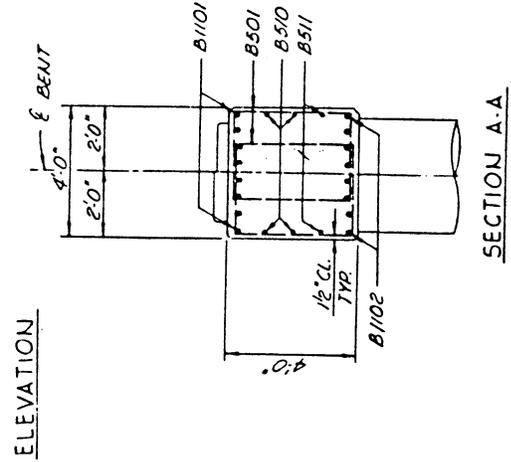
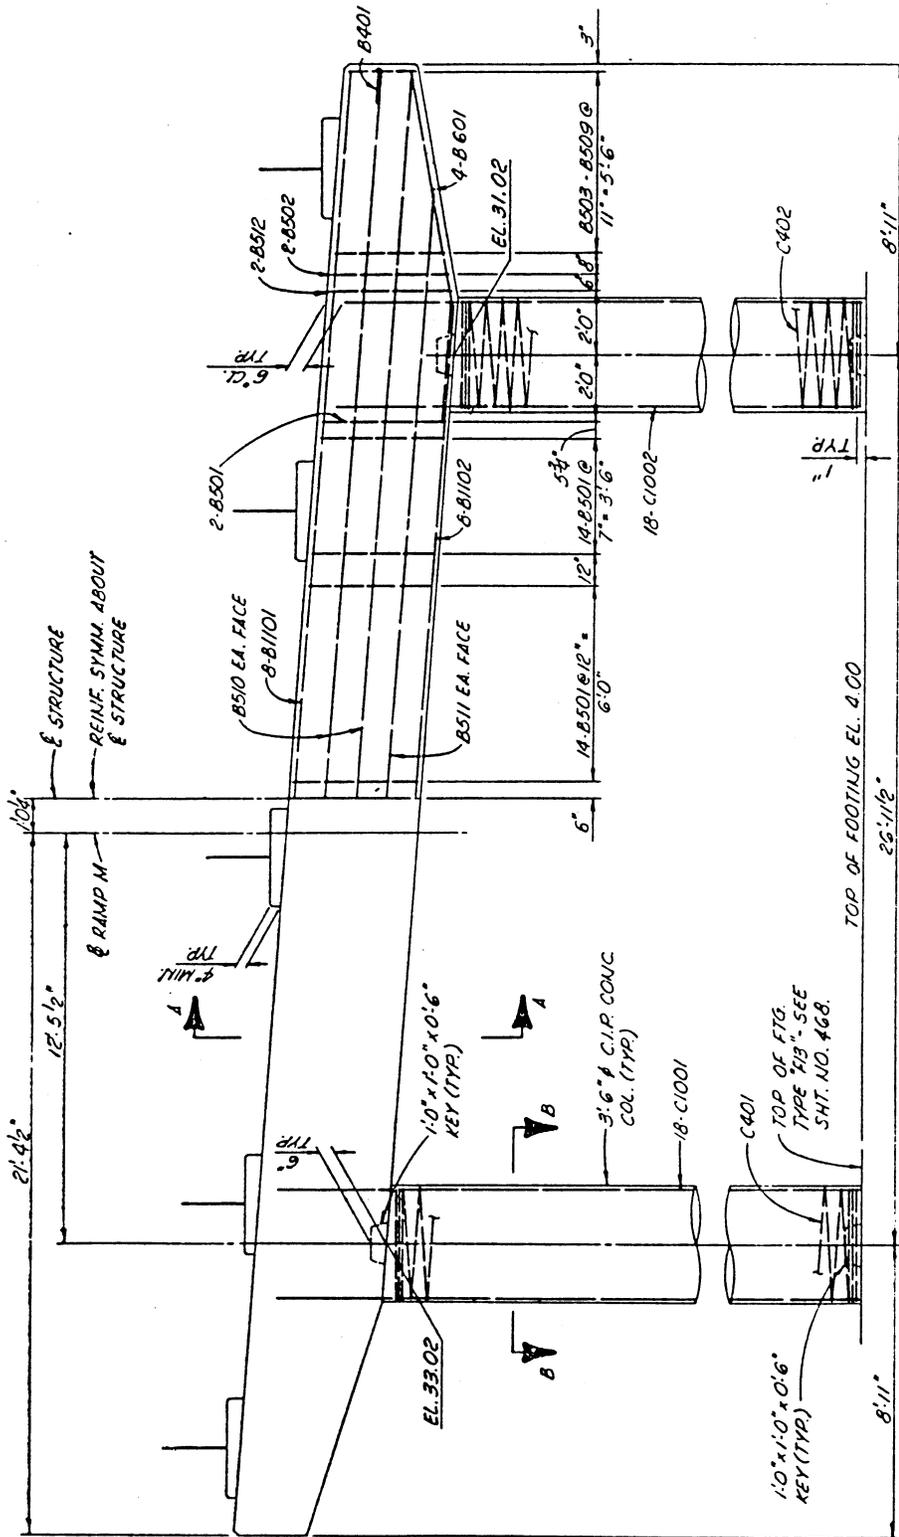


FIGURE 5-1 Louisiana Circular Column Bent Details

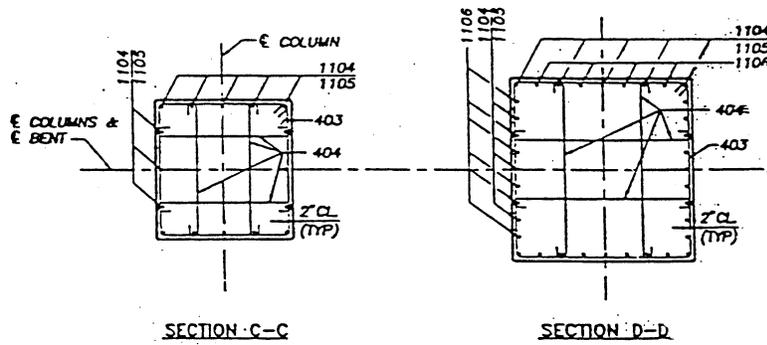
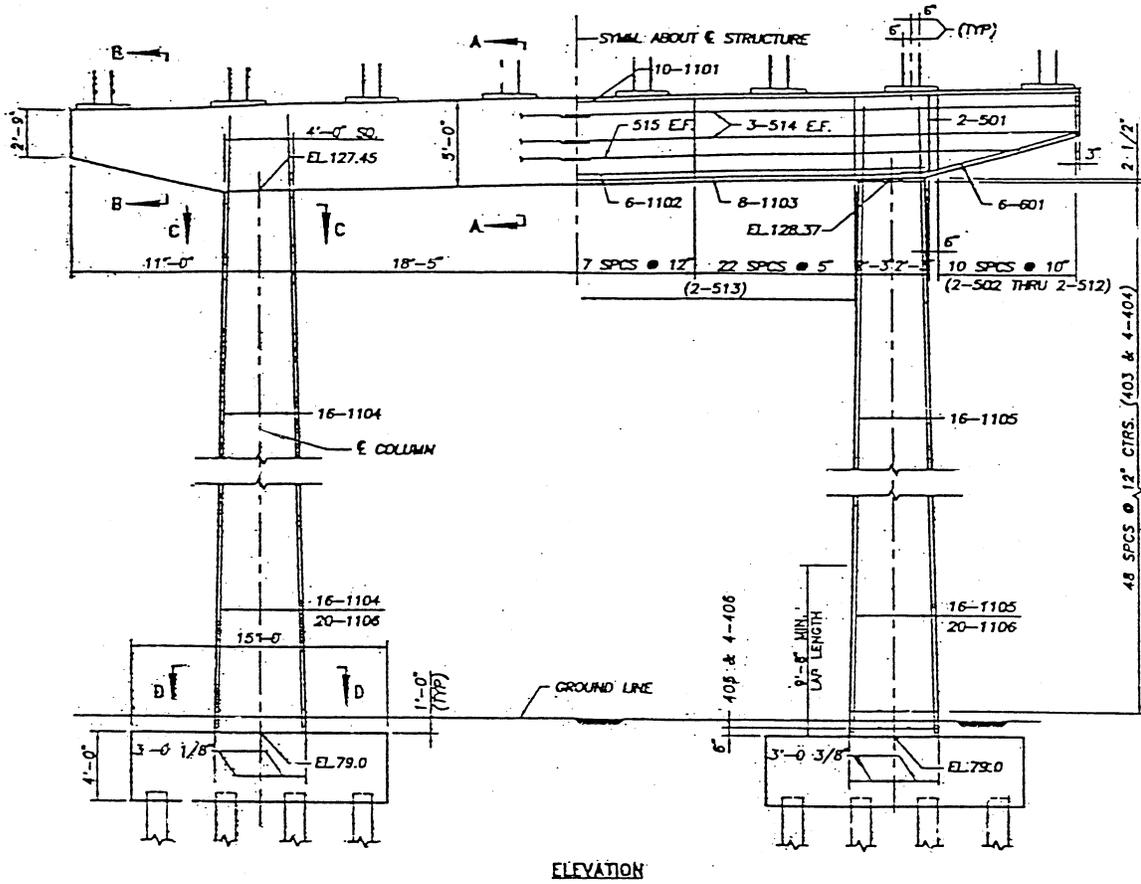


FIGURE 5-2 Louisiana Rectangular Column Bent Details

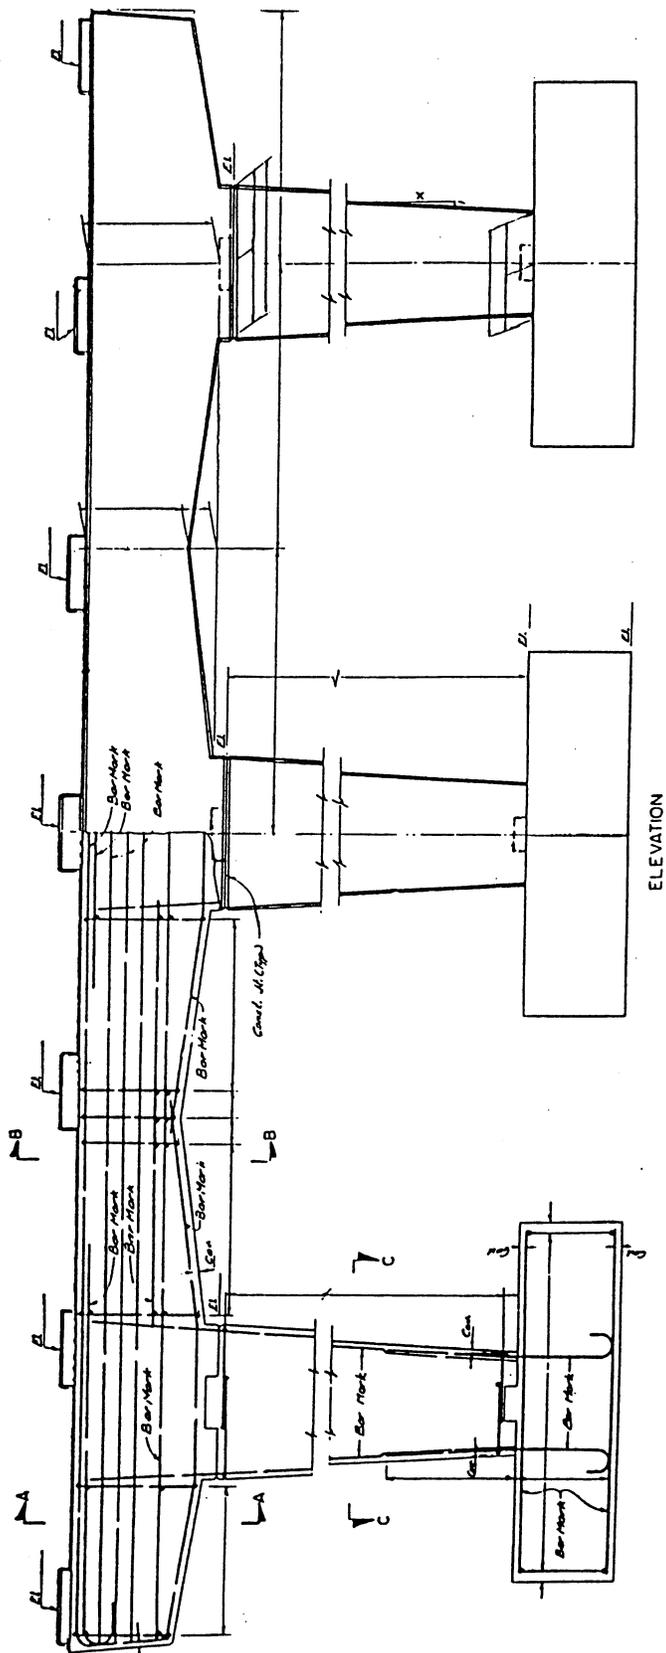


FIGURE 5-3a New York Rectangular Column Bent Details - Elevation

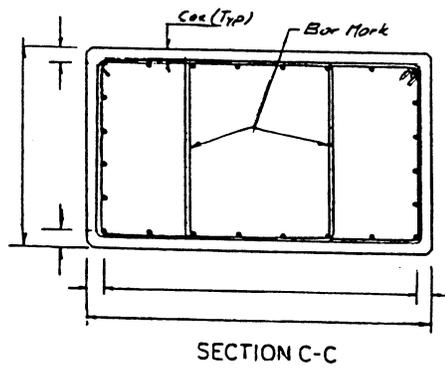
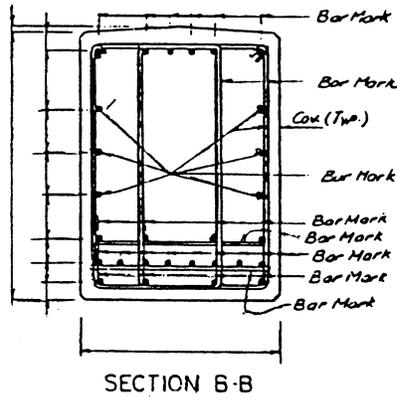
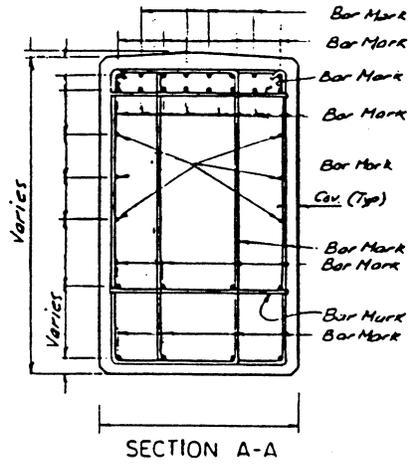


FIGURE 5-3b New York Rectangular Column Bent Details - Cross Sections

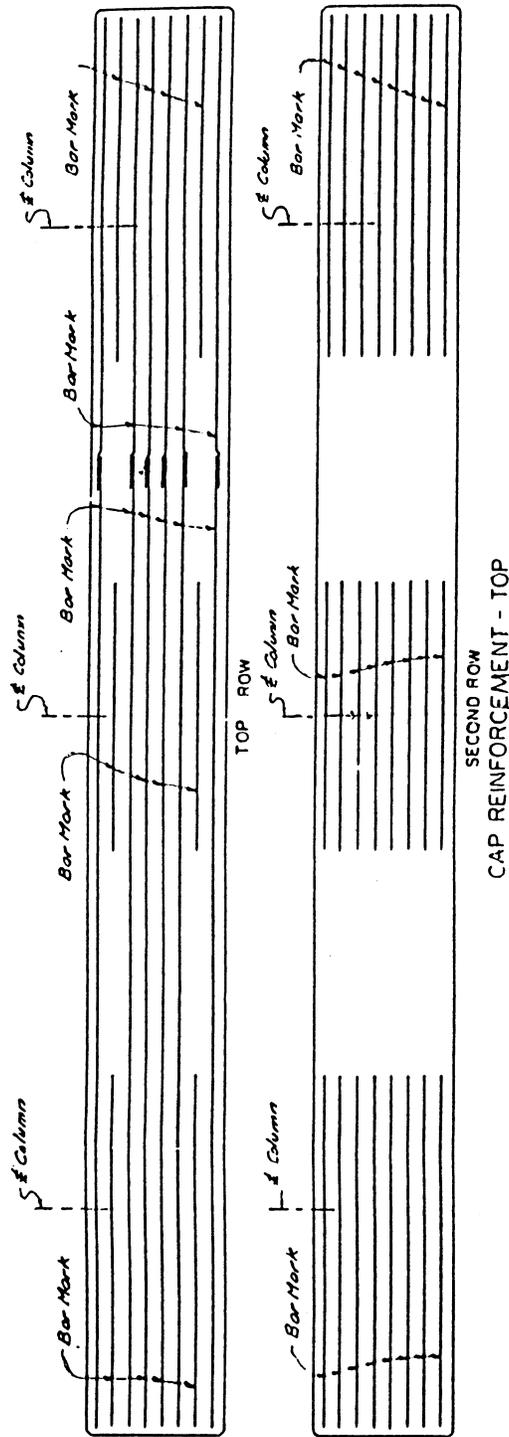


FIGURE 5-3c New York Rectangular Column Bent Details - Cap Reinforcement



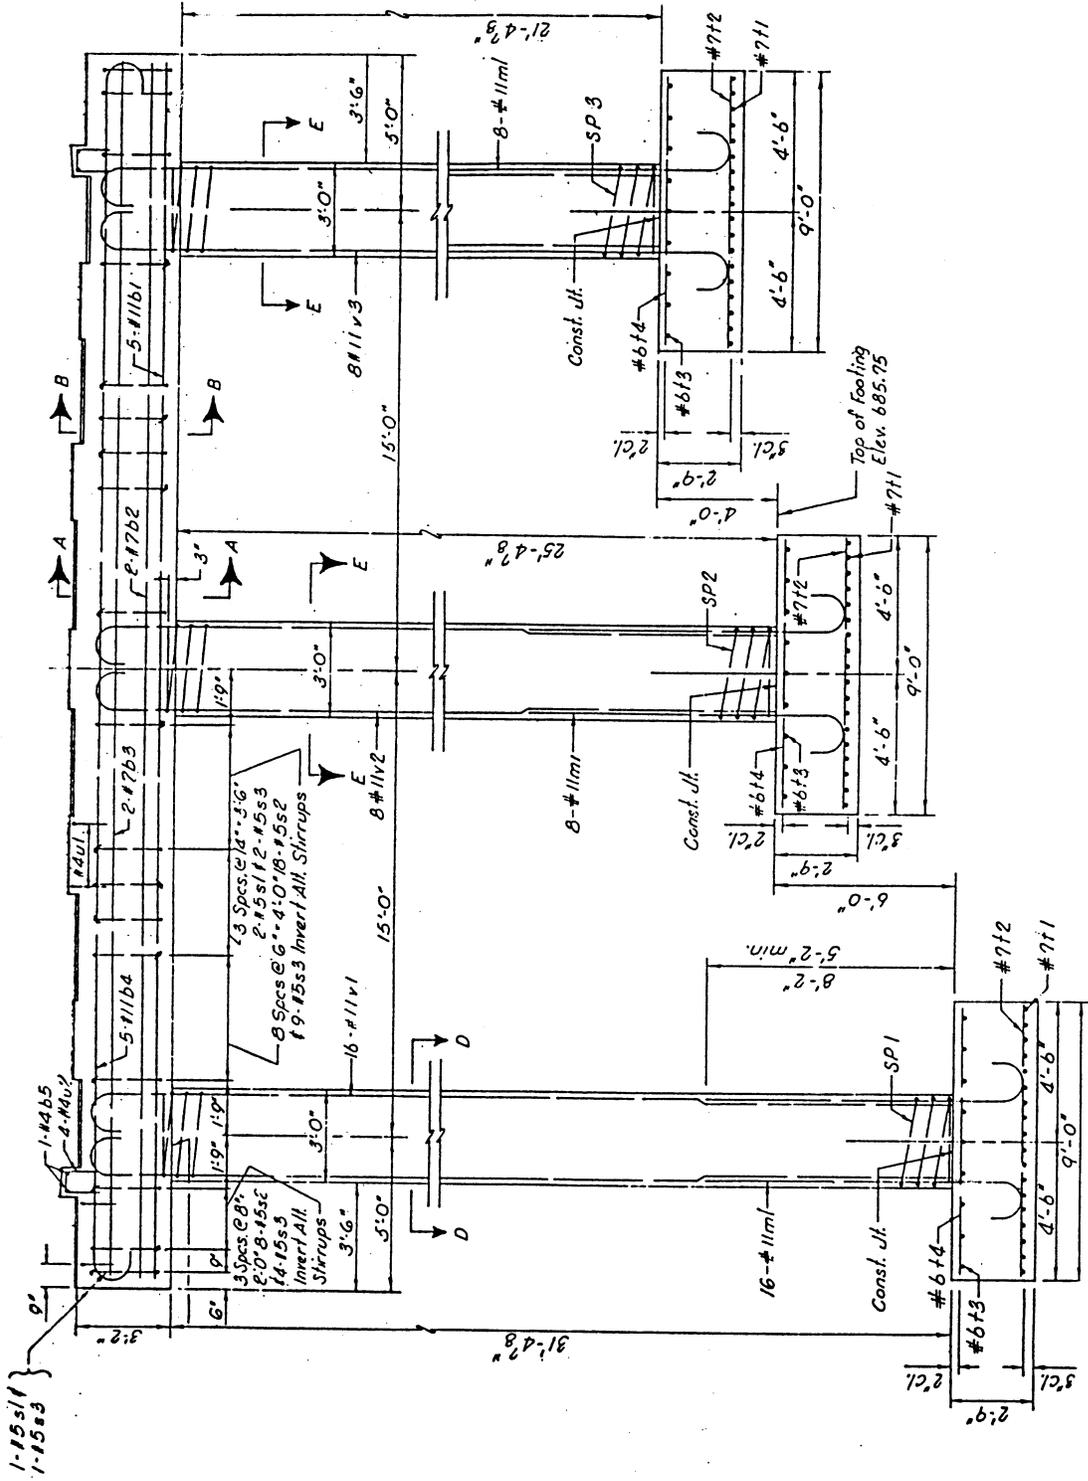



FIGURE 5-4a North Carolina Unequal Column Height Bent Details - Elevation

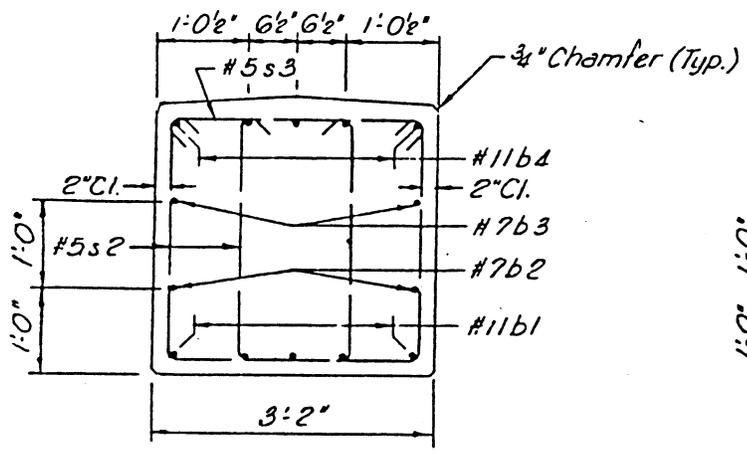


SECTION A-A
Scale: 3/4" = 1'-0"

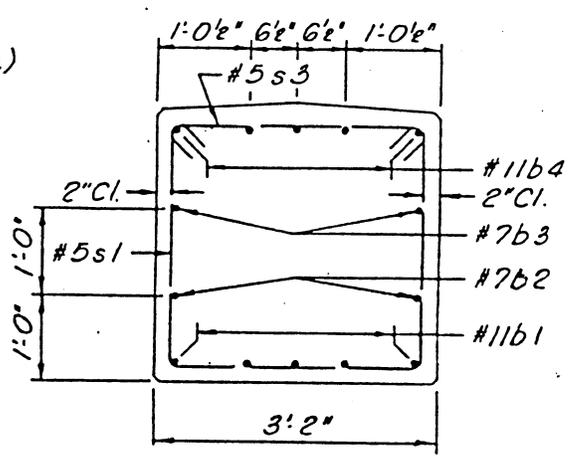

SECTION B-B
Scale: 3/4" = 1'-0"

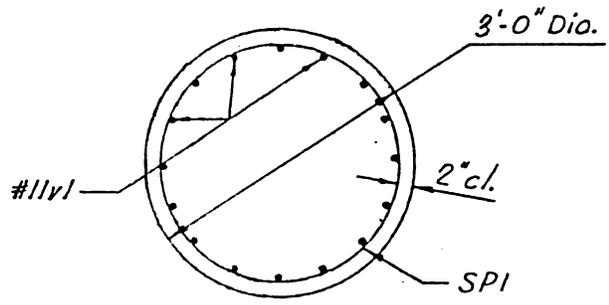


SECTION D-D
Scale: 3/4" = 1'-0"

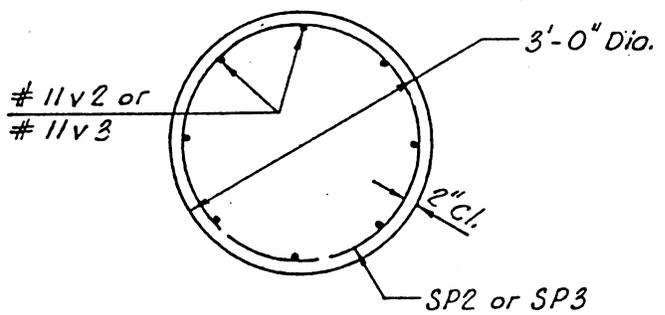

SECTION E-E
Scale 3/4" = 1'-0"

FIGURE 5-4b North Carolina Unequal Column Height Bent Details - Cross Sections

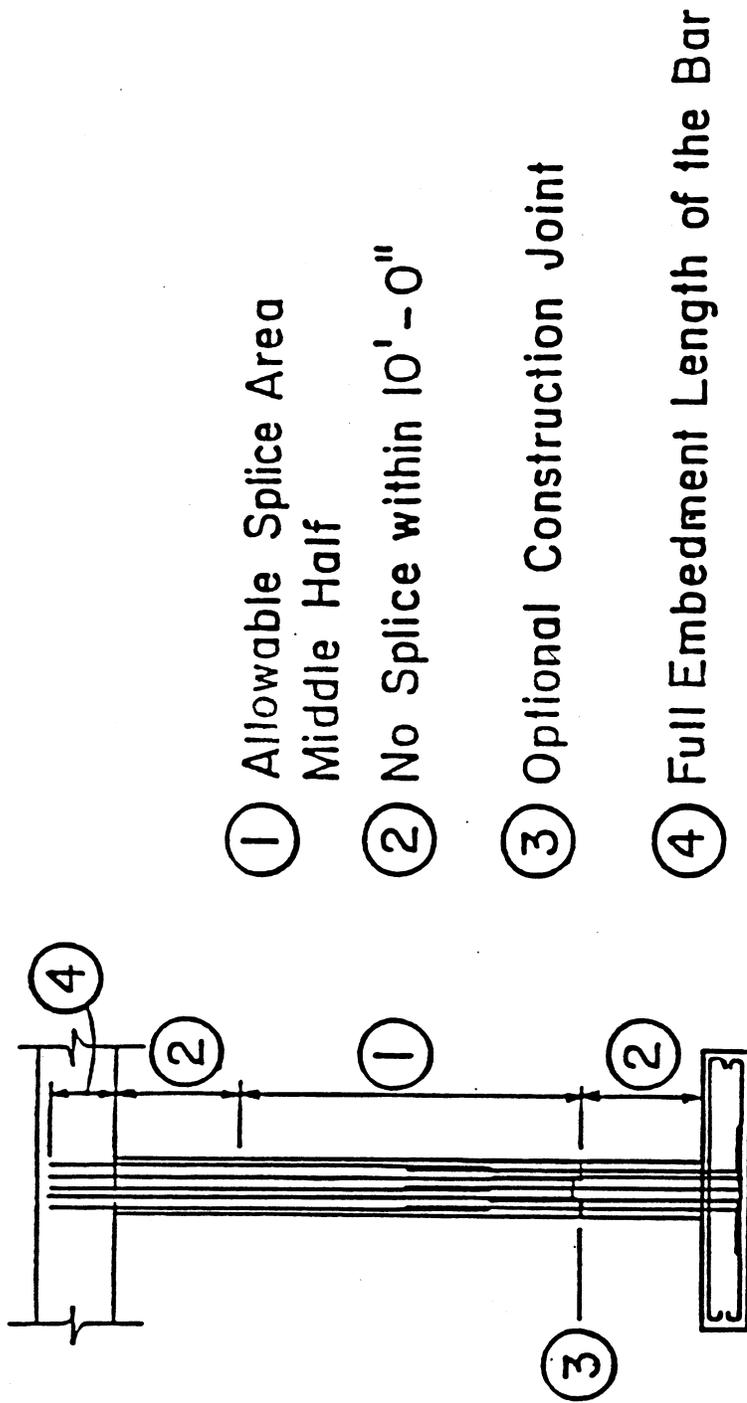

① Allowable Splice Area
Middle Half

② No Splice within 10' - 0"

③ Optional Construction Joint

④ Full Embedment Length of the Bar

Vertical Column Reinforcement

FIGURE 5-5 New York Vertical Column Reinforcement Requirements


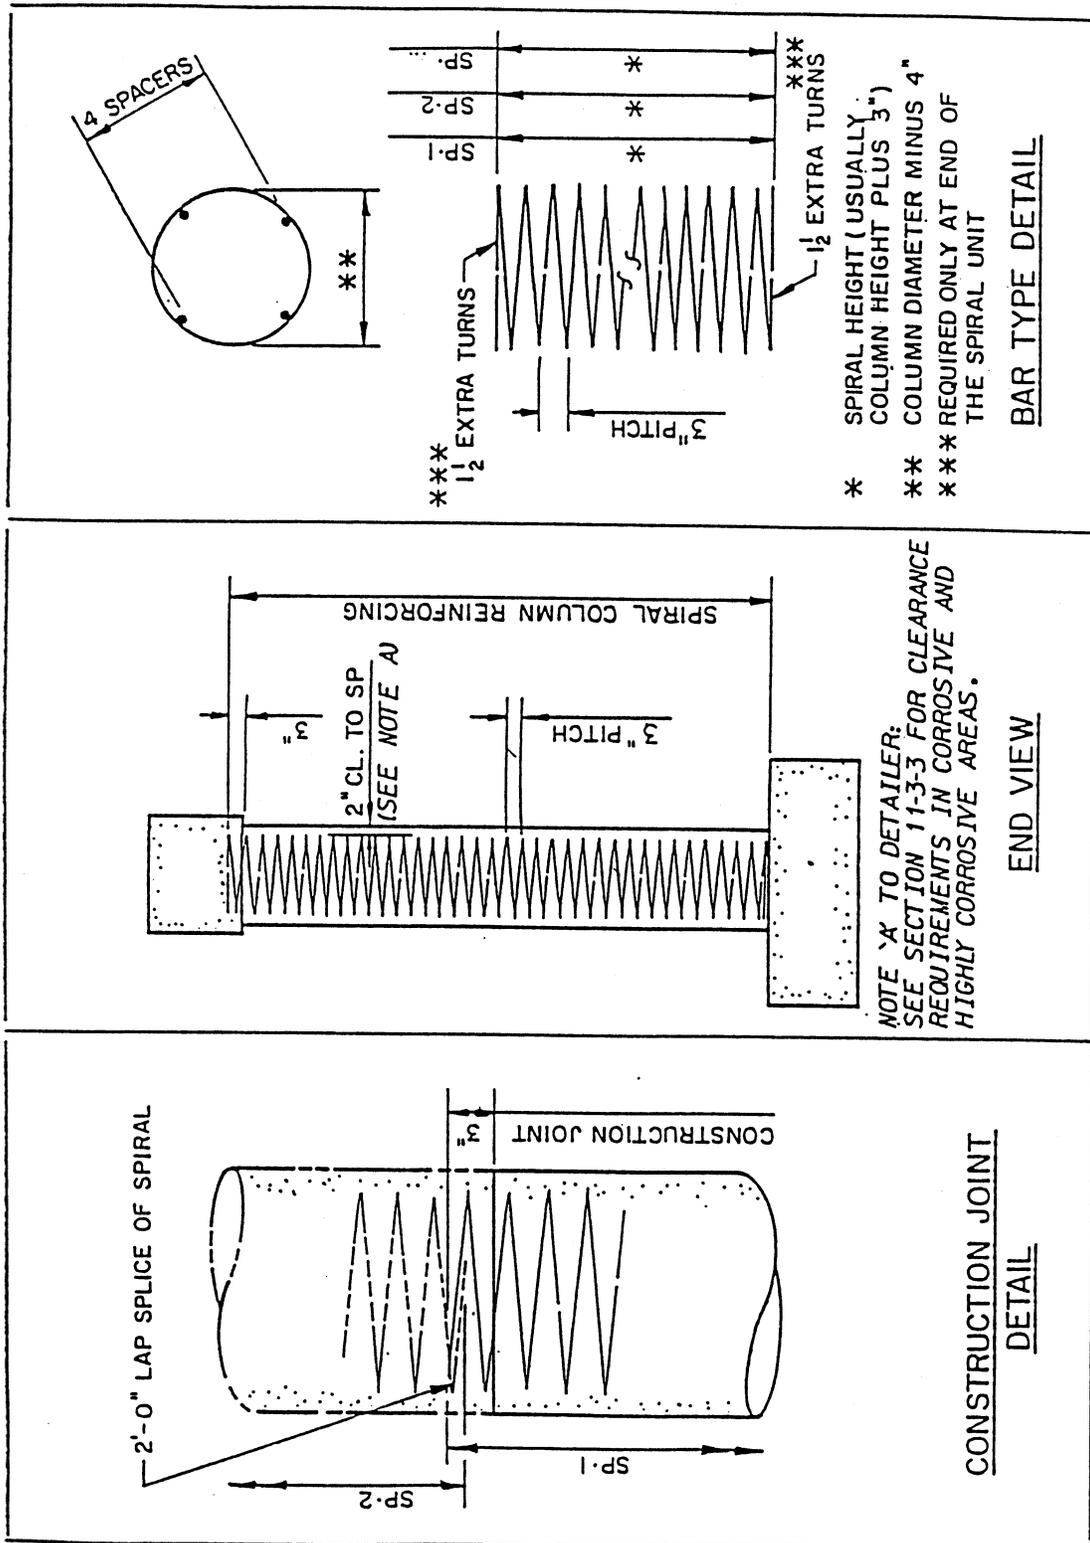


FIGURE 5-7 North Carolina Column Spiral Reinforcing Requirements

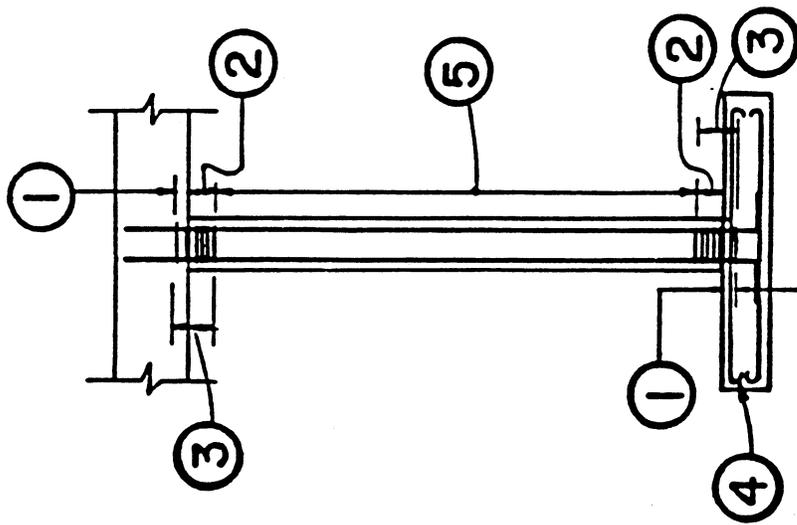

- ① 15" or one half the Maximum Column Dimension.
- ② Maximum Column Dimension or one sixth the clear height of the column, but not less than 18".
- ③ Ties (spirals) spaced at 6" max.
- ④ Hooks for all footing bars.
- ⑤ Standard tie (spiral) spacing.

**Ties for Rectangular Columns
& Spirals for Round Columns**

FIGURE 5-6 New York Transverse Column Reinforcement Requirements

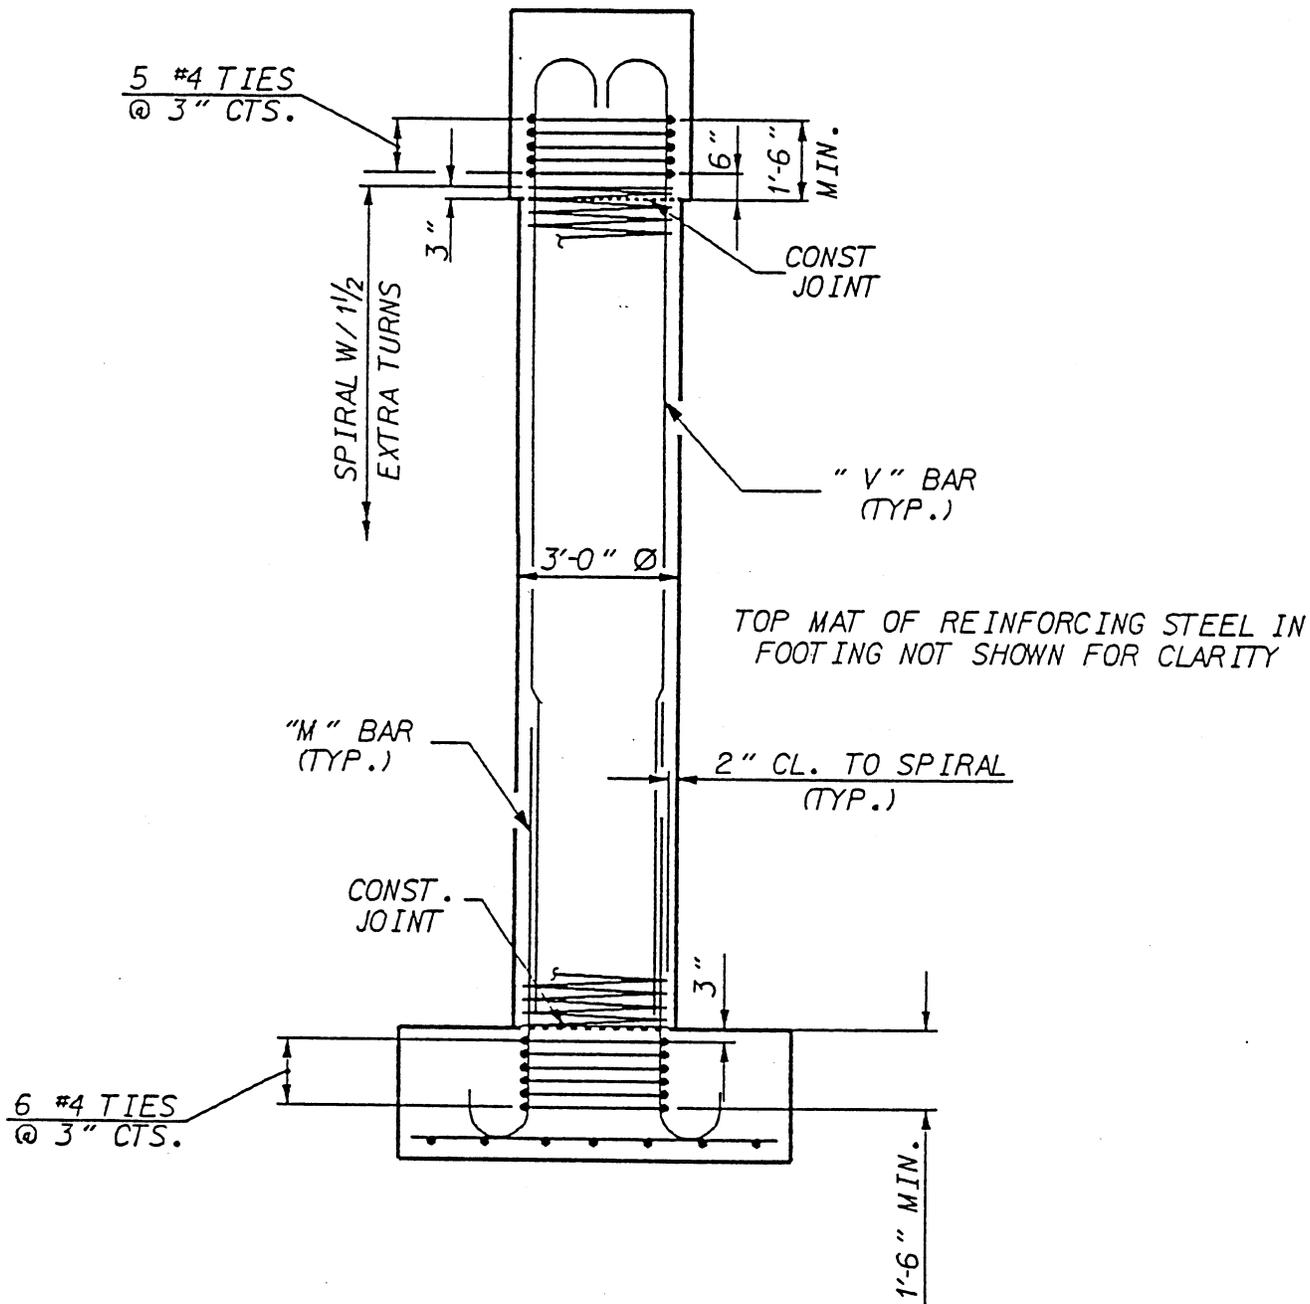


FIGURE 5-8 North Carolina Column Connection Details for SPC B

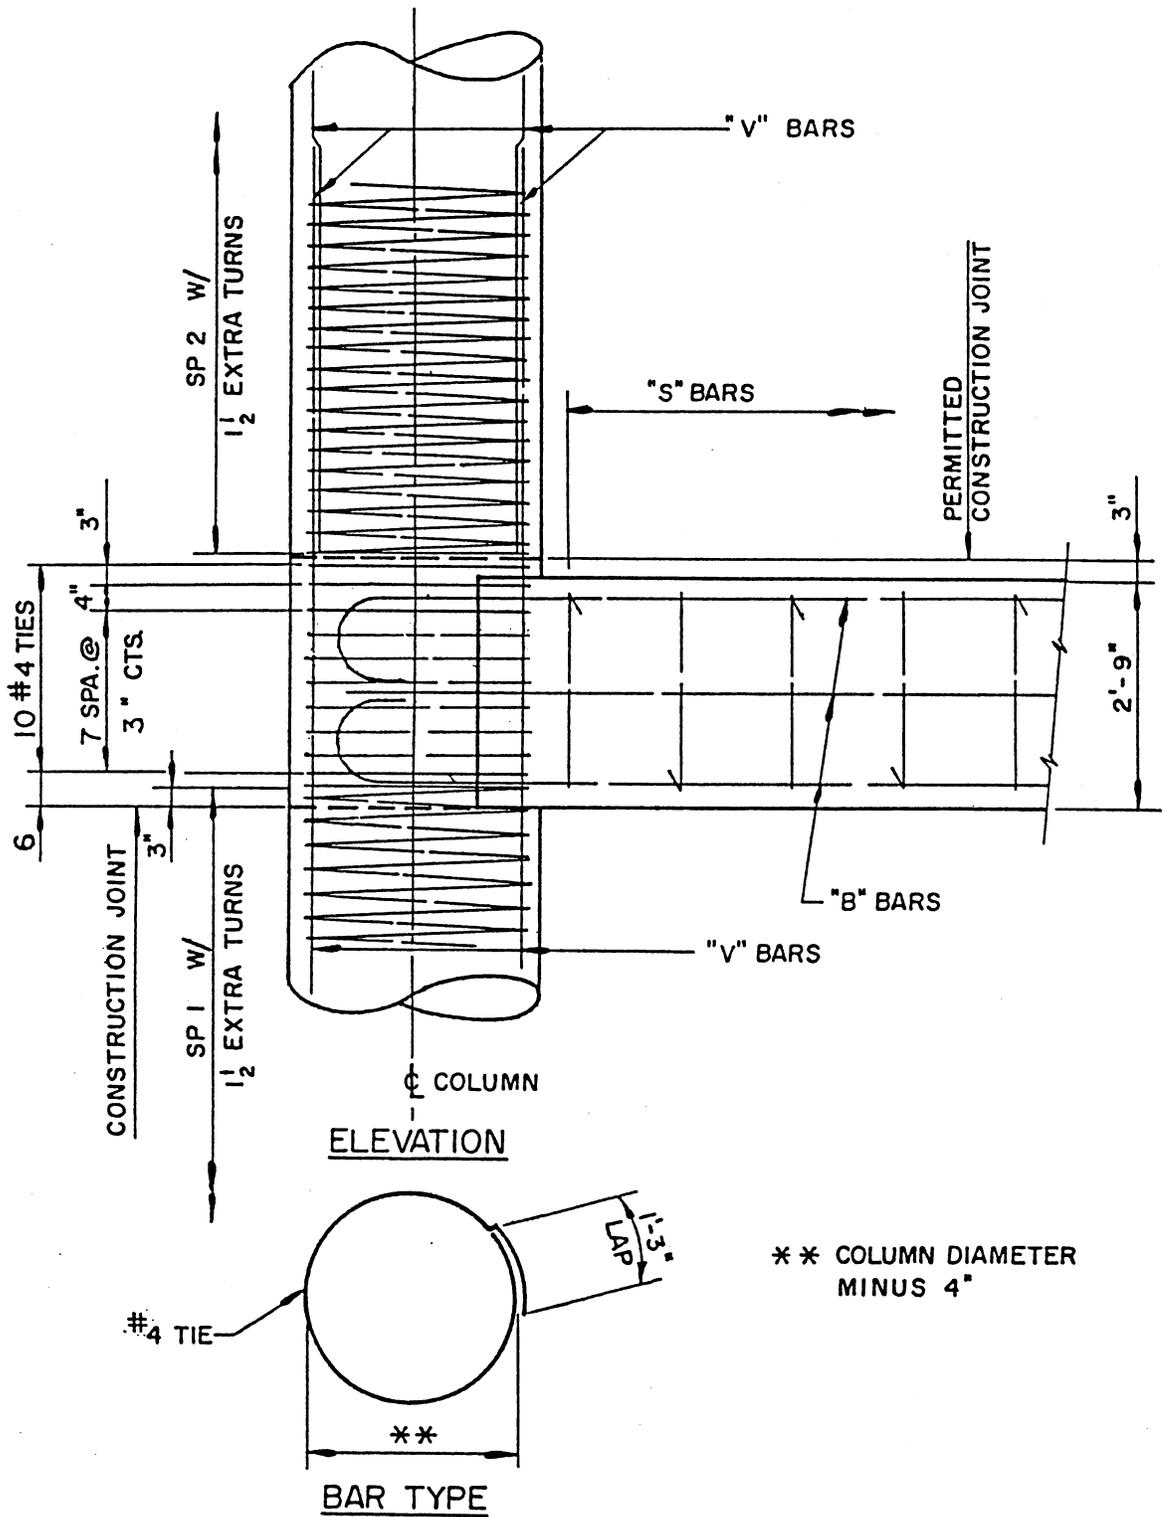


FIGURE 5-9 North Carolina Column Spiral Reinforcing at Struts

NOTE TO DETAILER

(1) ADD 3'-0" TO SPLICE LENGTH OF CRASH WALL STIRRUPS IF SPREAD FOOTINGS ARE USED TO TAKE CARE OF POSSIBLE ADJUSTMENTS OF FOOTING ELEVATION.

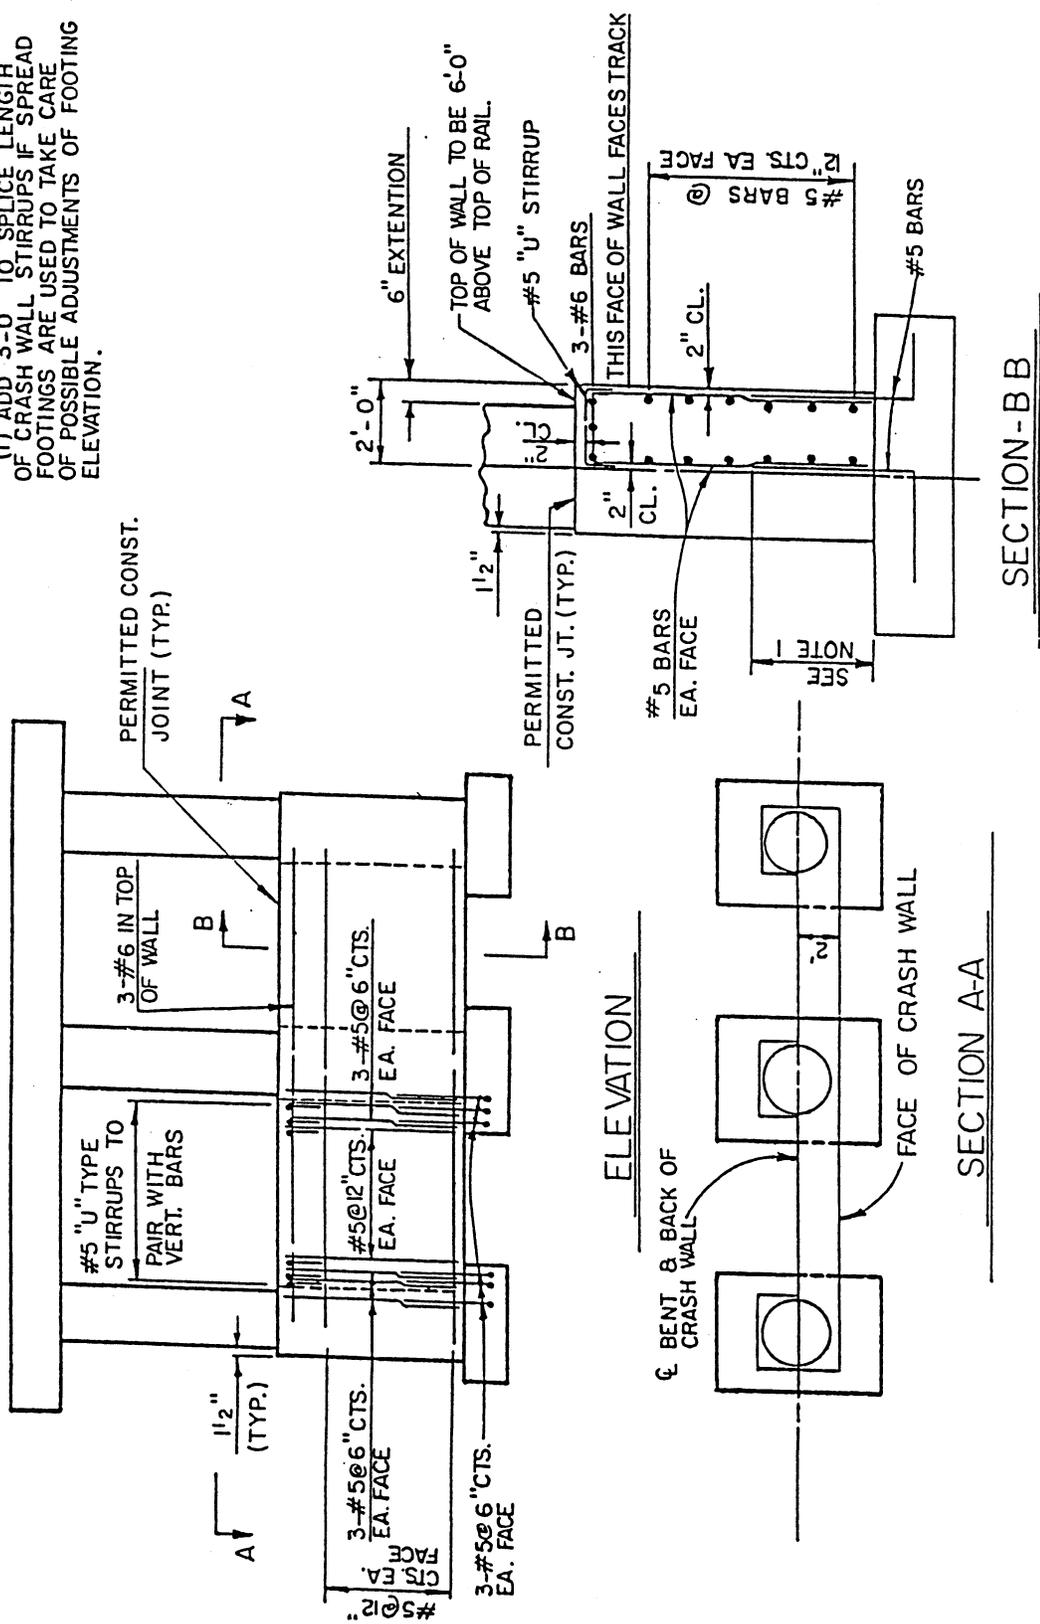


FIGURE 5-10 North Carolina Pier Crash Wall Details for Multicolumn Bents

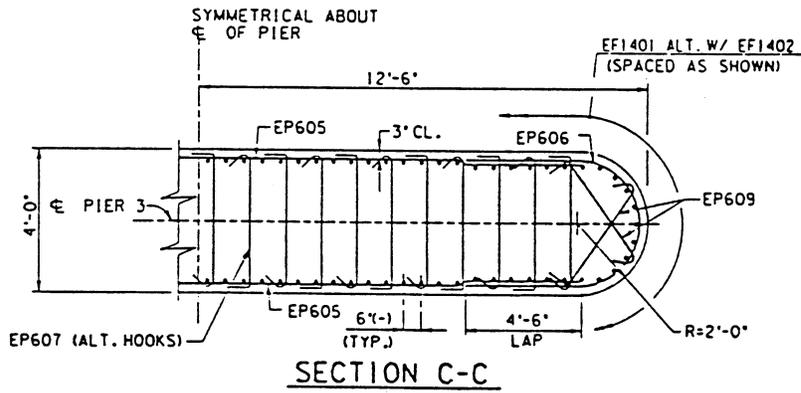
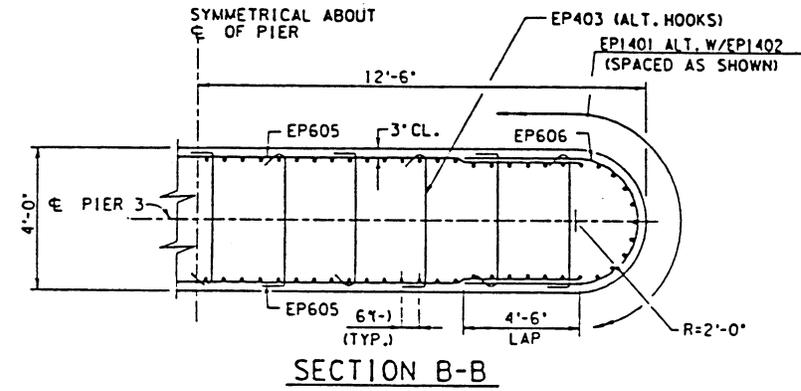


FIGURE 5-11b Pennsylvania Pier Wall with Hammerhead Cap Details - Cross Sections

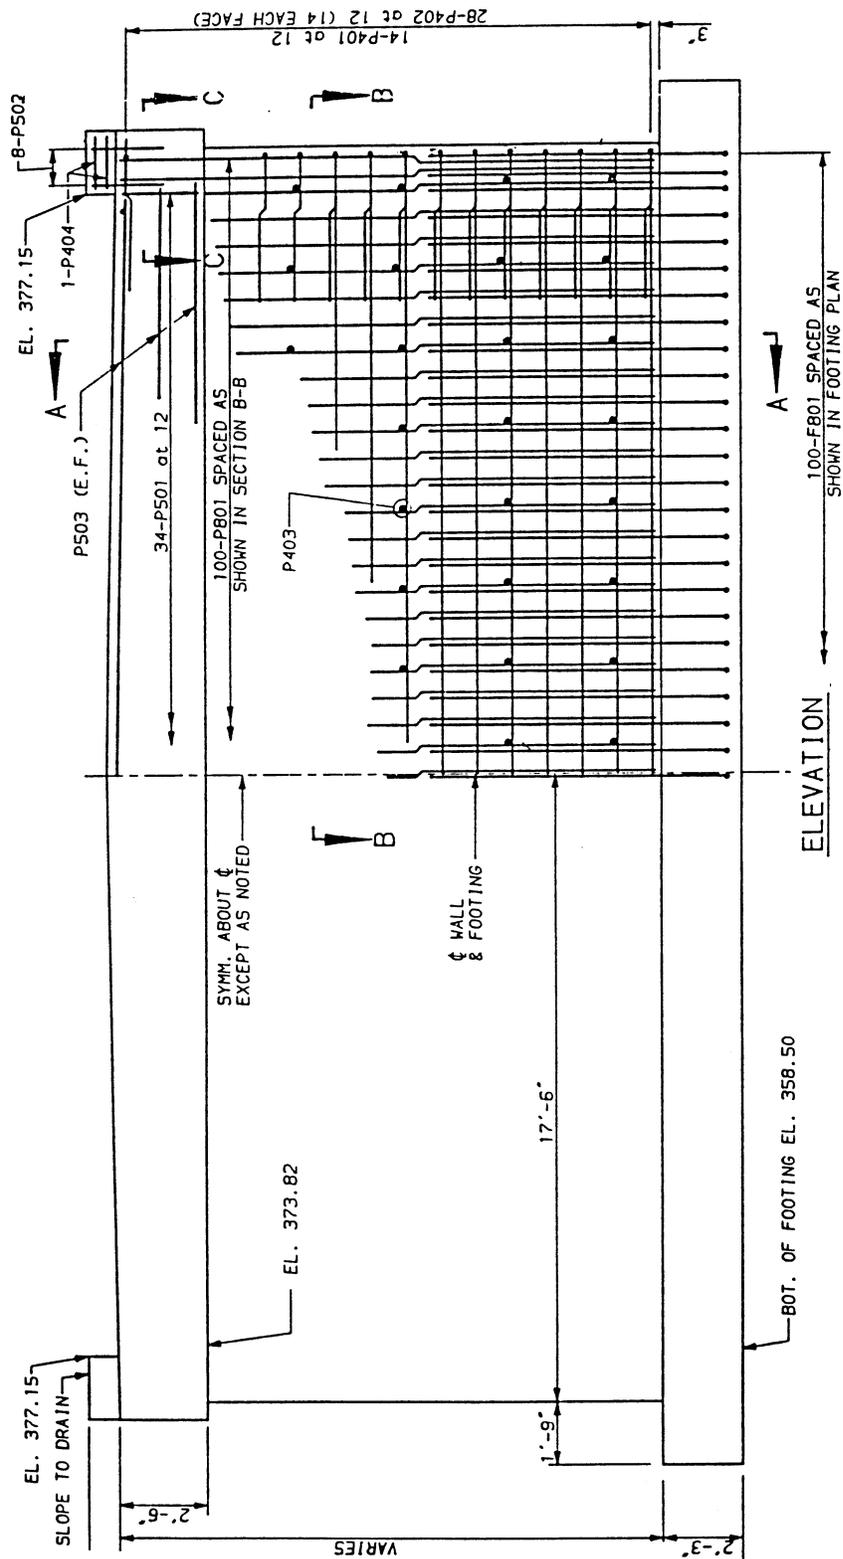


FIGURE 5-12a Pennsylvania Pier Wall with Widened Top Cap Details - Elevation


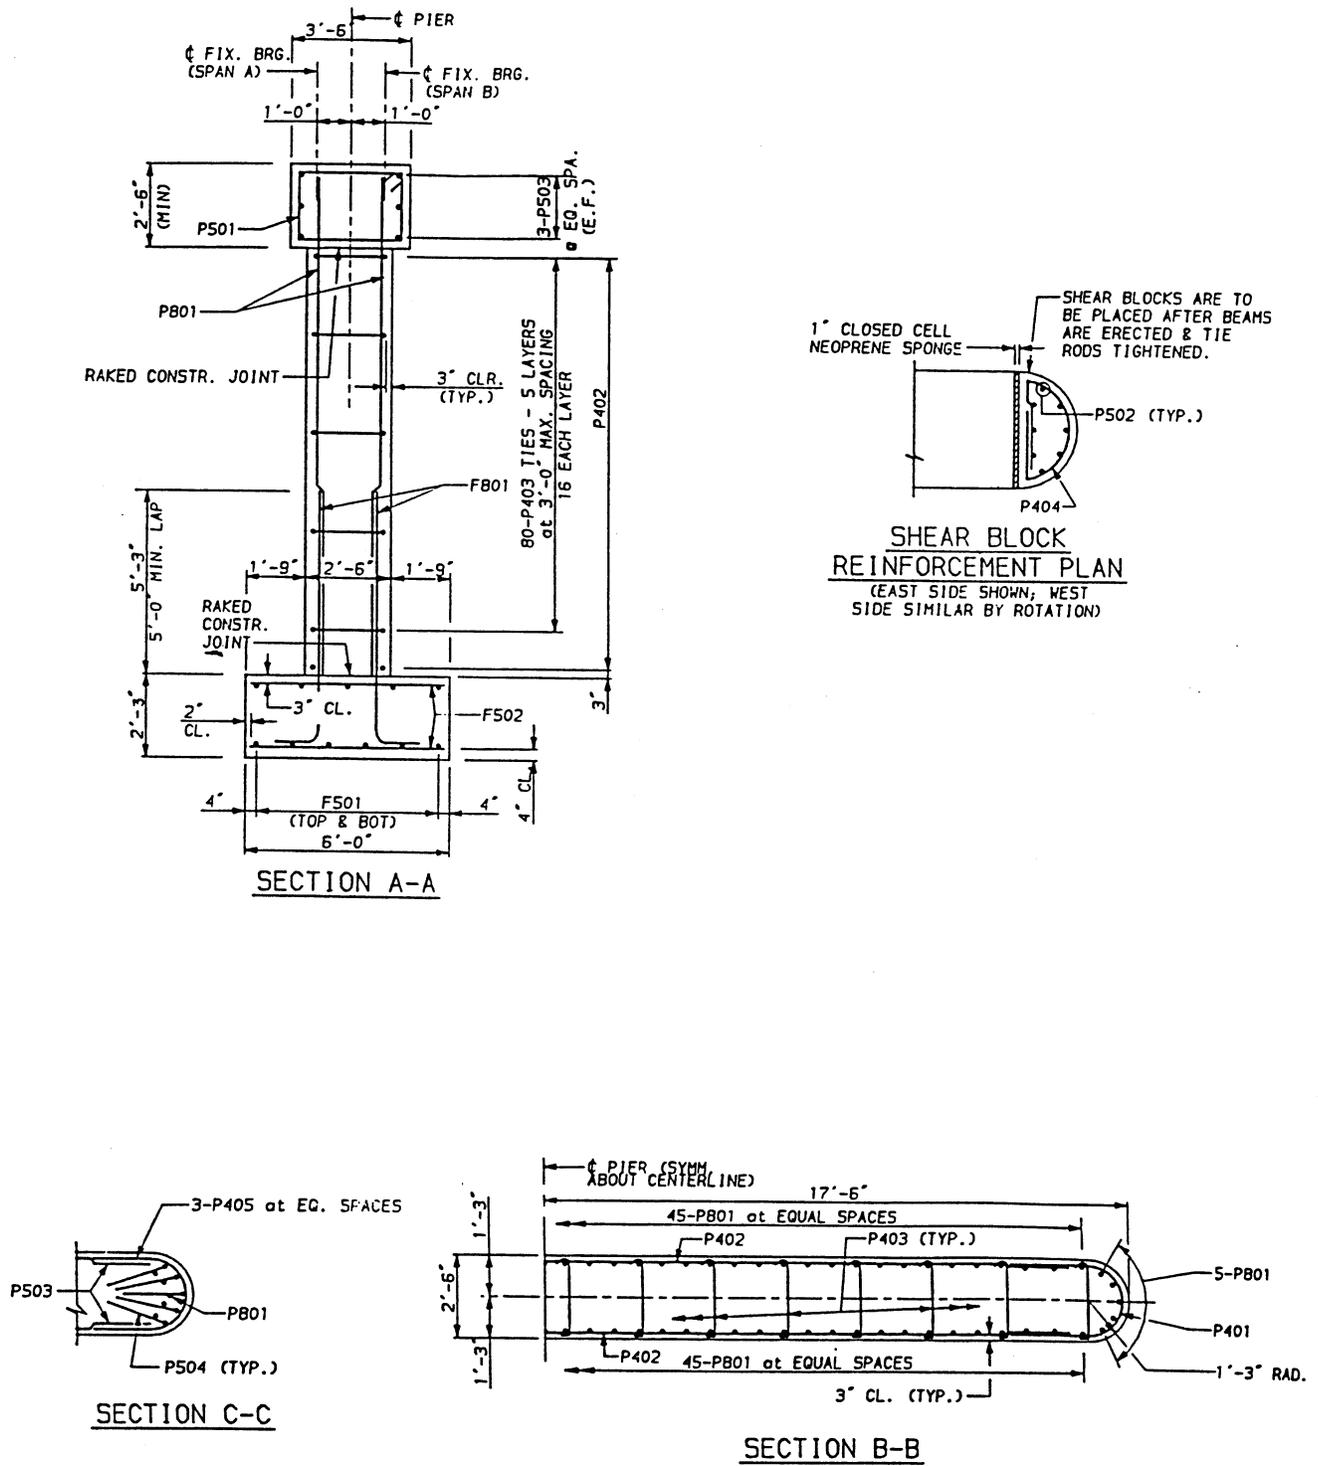


FIGURE 5-12b Pennsylvania Pier Wall with Widened Top Cap Details - Cross Sections

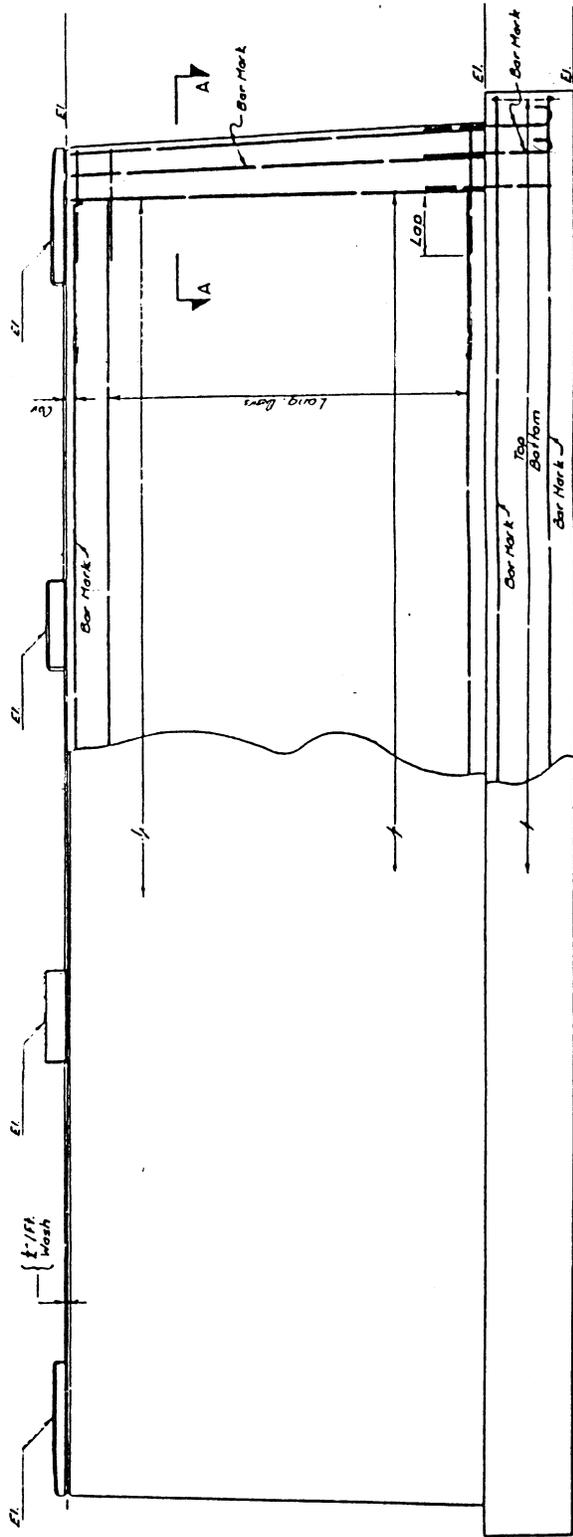

ELEVATION

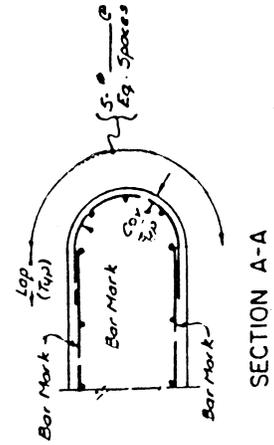
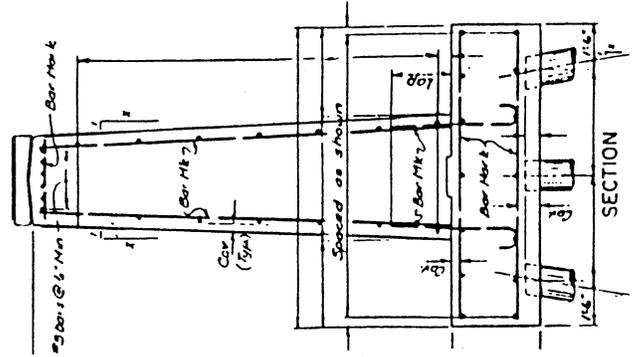


FIGURE 5-13 New York Pier Wall Details

SECTION 6 BENT CAP DESIGN AND DETAILING ISSUES IN COLUMN BENTS

6.1 Cap Dimensions

Description: There are three basic types of caps that are most common; the rectangular beam type with the superstructure on top (see figure 6-1), the hammerhead used for the single column bents (see figures 6-2, 6-3a and 6-4a), and the inverted-T cap (see figures 6-5 and 6-6). The inverted-T bent cap type is usually used for aesthetic reasons, or when it is necessary to reduce the overall depth of the cap plus the superstructure. The minimum width of the rectangular beam caps in Louisiana is at least 4" greater than the column diameter or the required clearance dictated by the bearing areas. Pennsylvania recommends up to 12" wider caps than the thickness or diameter of the columns. In North Carolina the minimum size of the bent caps is 3'-2" wide by 2'-6" deep. The minimum bent cap width is also required to meet the bearing support length provisions of the AASHTO Specifications for Seismic Design, Section 4.9.1 for various span lengths and column heights. The cap length is required to extend at least 9 inches beyond the edge of the extreme bearing plate on steel superstructures or beyond the anchor bolts on prestressed girder superstructures. Representative bent cap details are shown in figures 6-1 through 6-6.

Advantages: The wider cap section provides a higher flexure capacity, forcing plastic moments to develop in the columns. Also, it reduces the conflict between column and bent cap reinforcement.

6.2 Longitudinal Cap Steel

Description: The longitudinal cap steel is designed in accordance with the AASHTO Specifications. Both top and bottom longitudinal steel is provided. No. 4 bars at 12" spacing are required on the vertical faces of caps for shrinkage and temperature. No. 5 bars are required for massive caps. For hammer head pier caps, Pennsylvania requires that all the calculated cantilever reinforcement be extended throughout the entire length of the cap. In deep caps, additional longitudinal bars are placed at intervals throughout the depth of the cap. No. 5 bars spaced at 12" maximum are required at the bottom of hammer head caps. Representative longitudinal cap steel details are shown in figures 5-1 through 5-4 and 6-1 through 6-6.

Advantages: When the top and bottom longitudinal reinforcement is made continuous along the bent the seismic capacity of caps that may be subjected to load reversals is significantly increased.


Disadvantages: Continuous reinforcement over the cap makes construction more difficult, and may result in conflict of steel at column and bent connection.

Historical: Past performance of bent caps during earthquakes has shown that when the bottom reinforcement stops at the column, cap damage near the column may occur before the column yields as a result of the high positive moments that can be induced by seismic loading.


6.3 Cap Shear Reinforcement

Description: The maximum stirrup spacing in a bent cap is 12". In Louisiana, the first stirrup adjacent to the surface of a column is located at a maximum of 3" away from the column and the first space is under 6". Stirrups are closed, and the minimum size used is No. 4 bars. In North Carolina, stirrups consist of U-shaped bars with 135 degree hooks ends closed by a tie with 135 degree hooks. Alternate stirrups are inverted. The end of caps are reinforced with U-shaped bars. No. 4 U-shaped stirrups at 6-inch centers are placed beneath the bearing area of each line of girders or beams. Additional reinforcement requirements are specified for the top reinforcing steel of stepped bent caps (see figure 4-10). For hammer head caps, Pennsylvania requires that additional stirrups be placed in the cap within the limits of the shaft. It is recommended that stirrups be closely spaced near the ends of the shaft than in the interior region. Representative cap shear reinforcement details are shown in figures 5-1 through 5-4 and 6-1 through 6-6.


Advantages: The closed stirrups provide good confinement to the longitudinal steel and increase the cap ductility and torsional capacity. The closely spaced stirrups near the column increase the local cap capacity near the column locations.

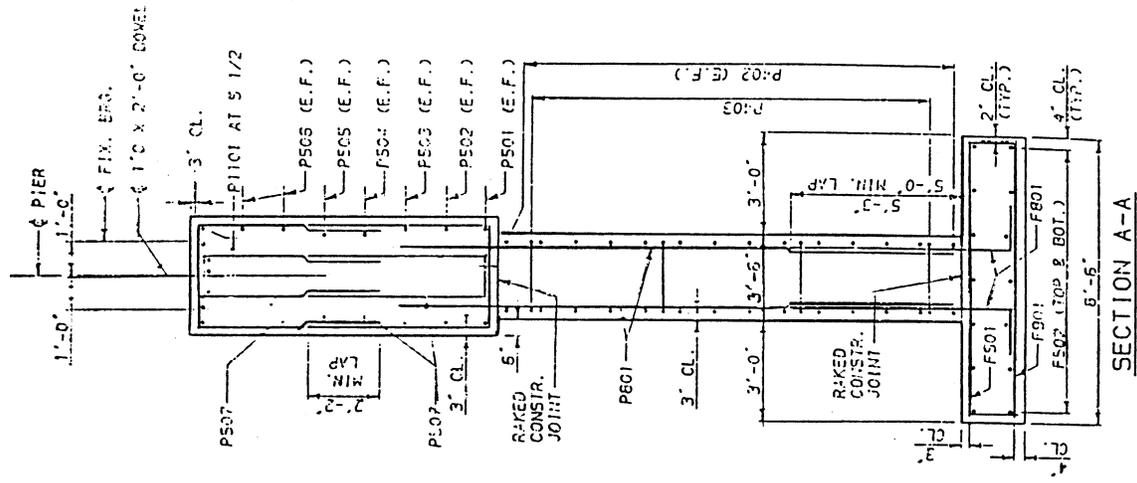

SECTION A-A

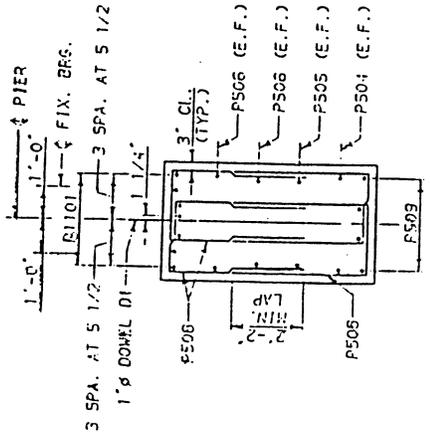

SECTION B-B

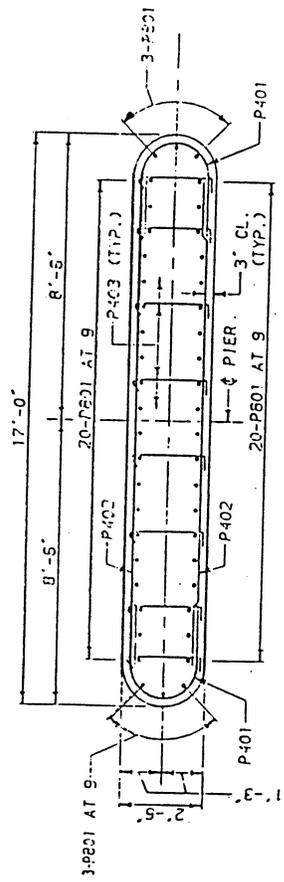

SECTION C-C

FIGURE 6-3b Pennsylvania Hammerhead Cap Details - Cross Sections

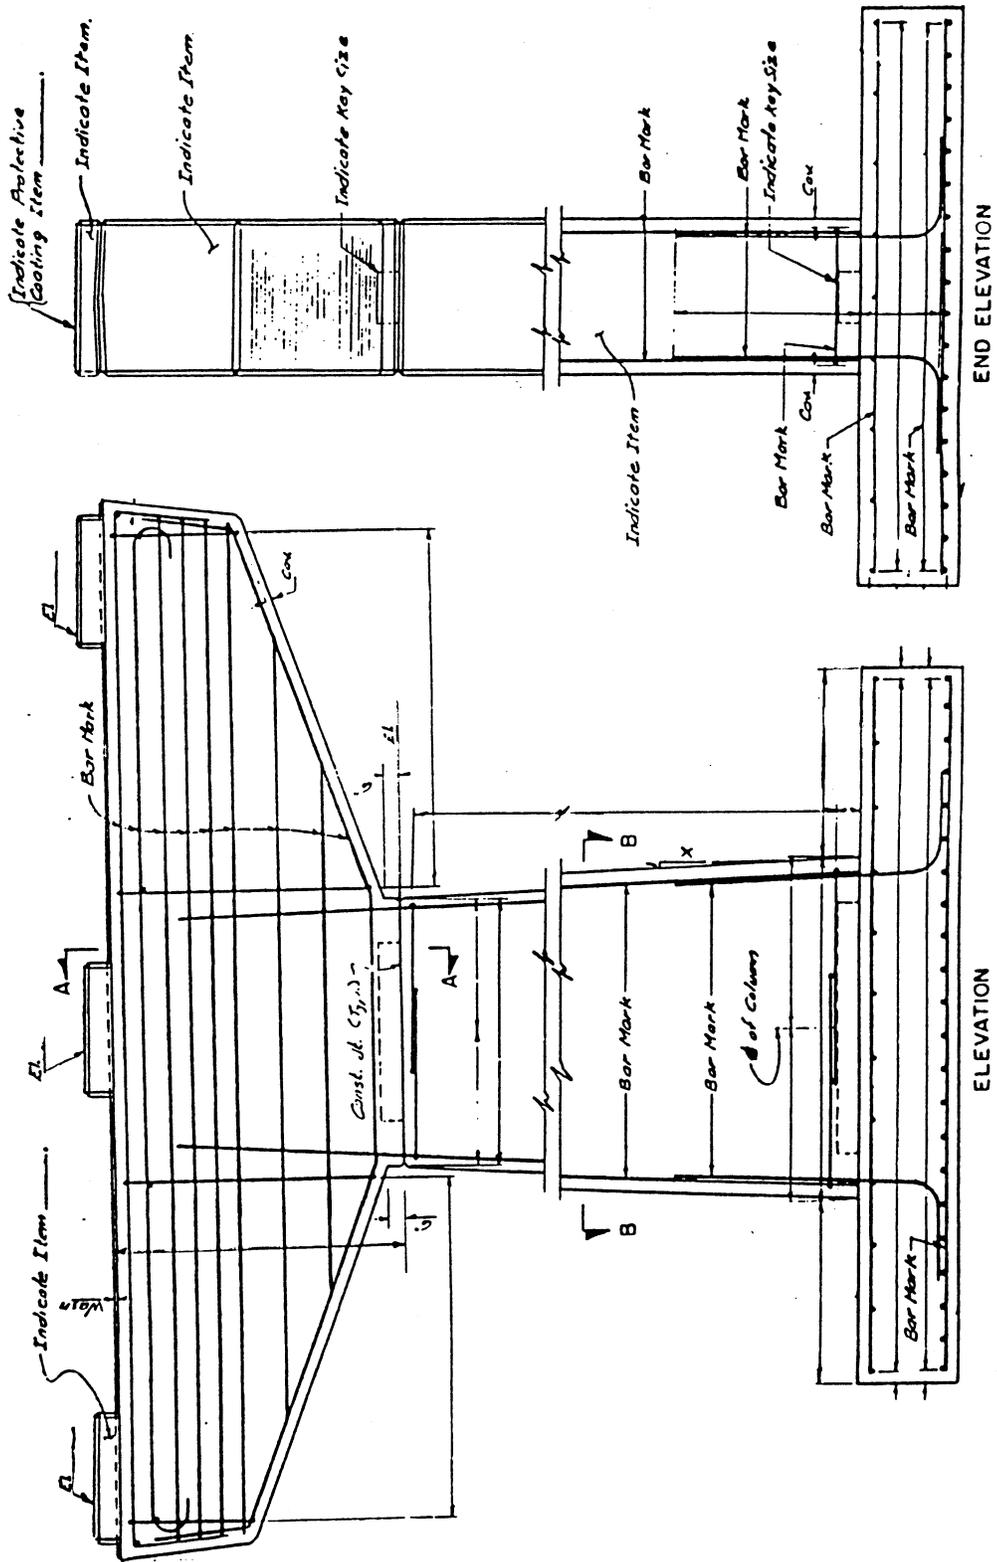


FIGURE 6-4a New York Hammerhead Cap Details - Elevations

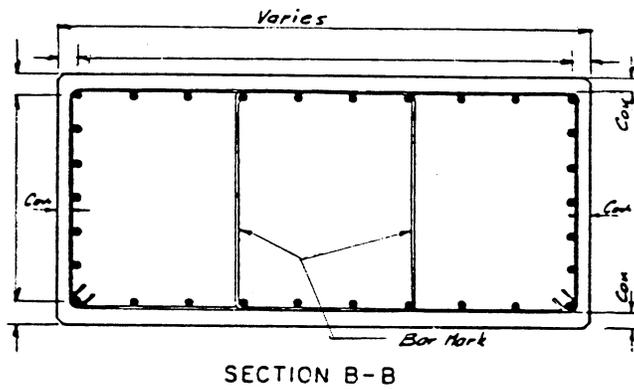
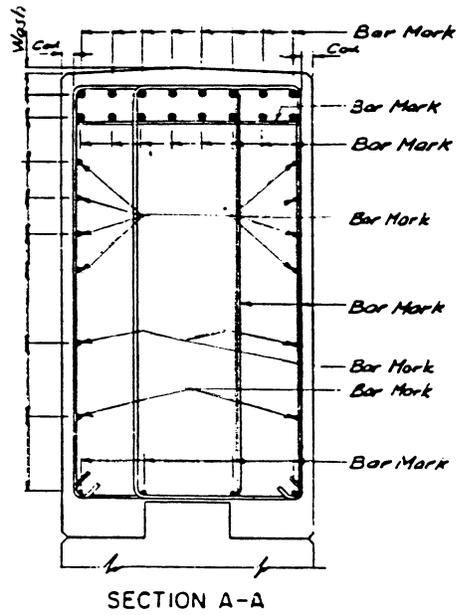


FIGURE 6-4b New York Hammerhead Cap Details - Cross Sections

INVERTED T BENT CAP DETAILS

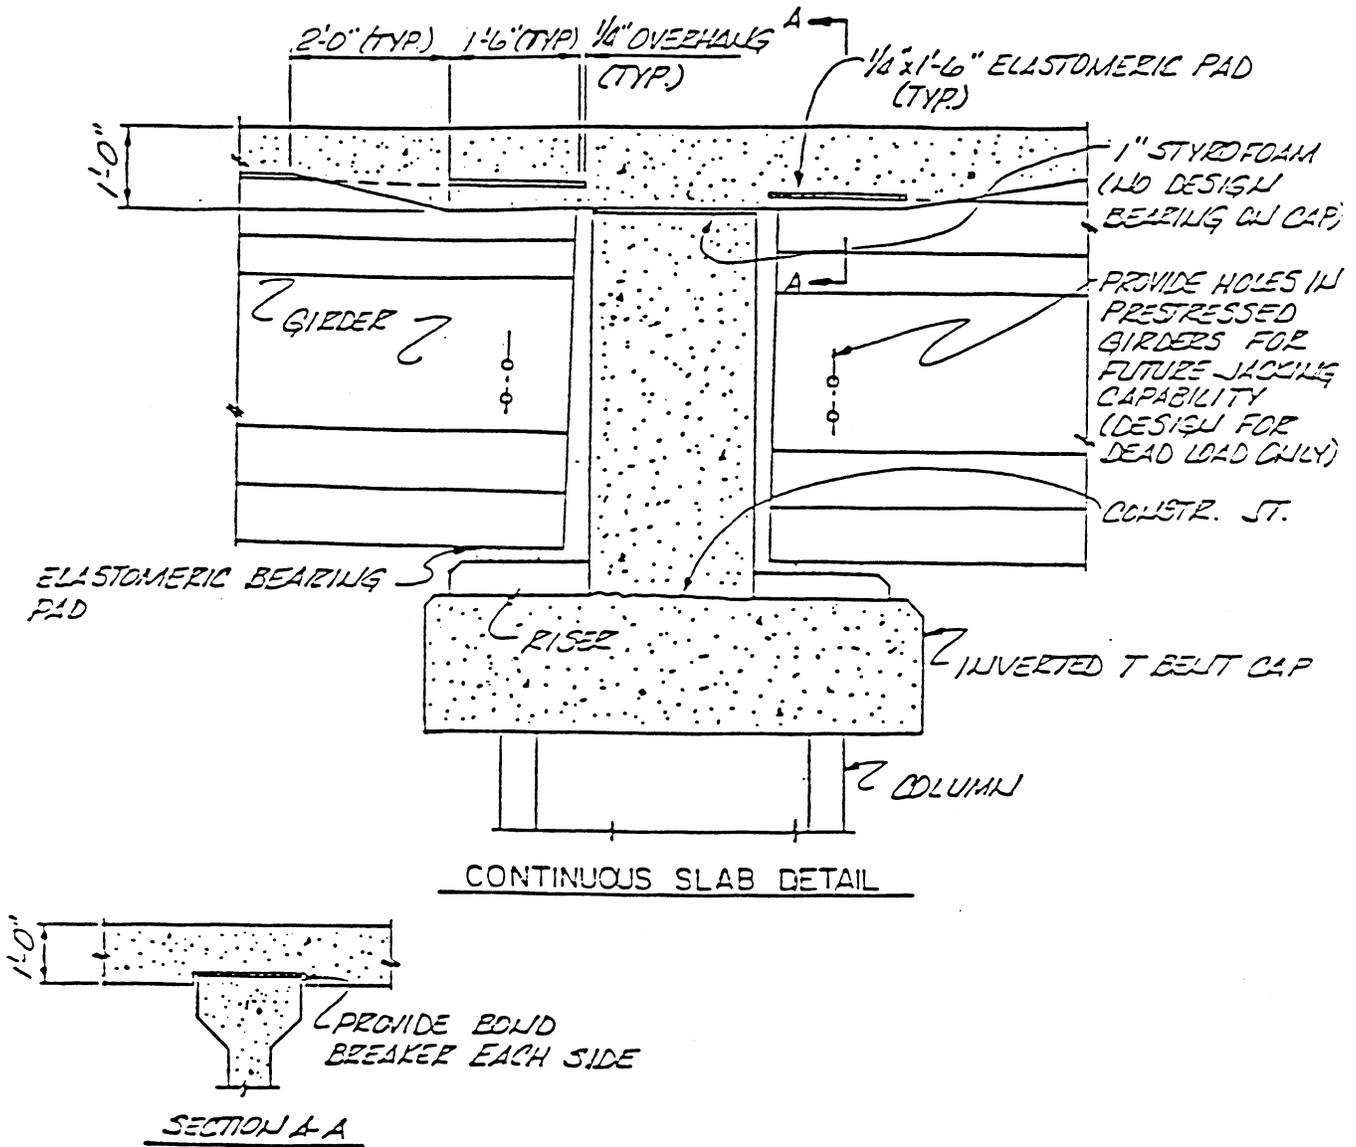


FIGURE 6-5 Louisiana Inverted T-Bent Cap Requirements

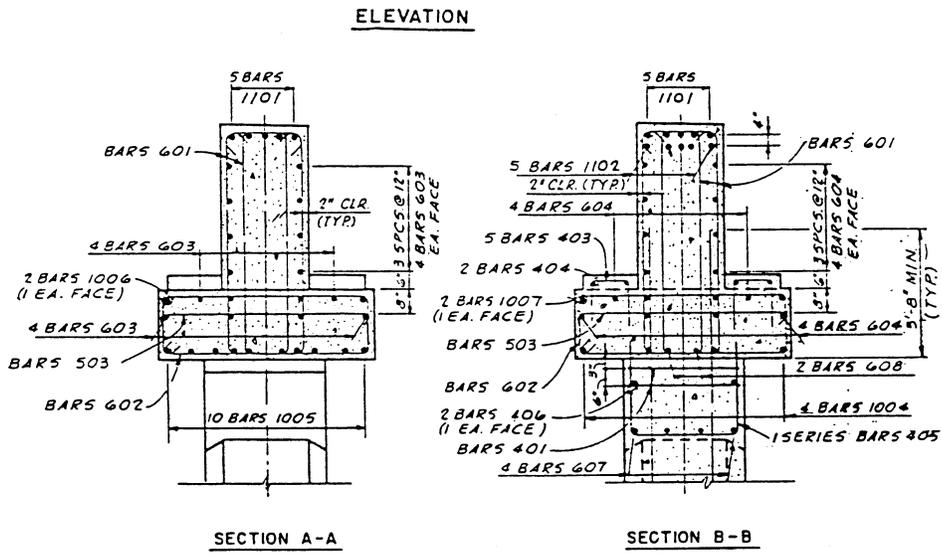
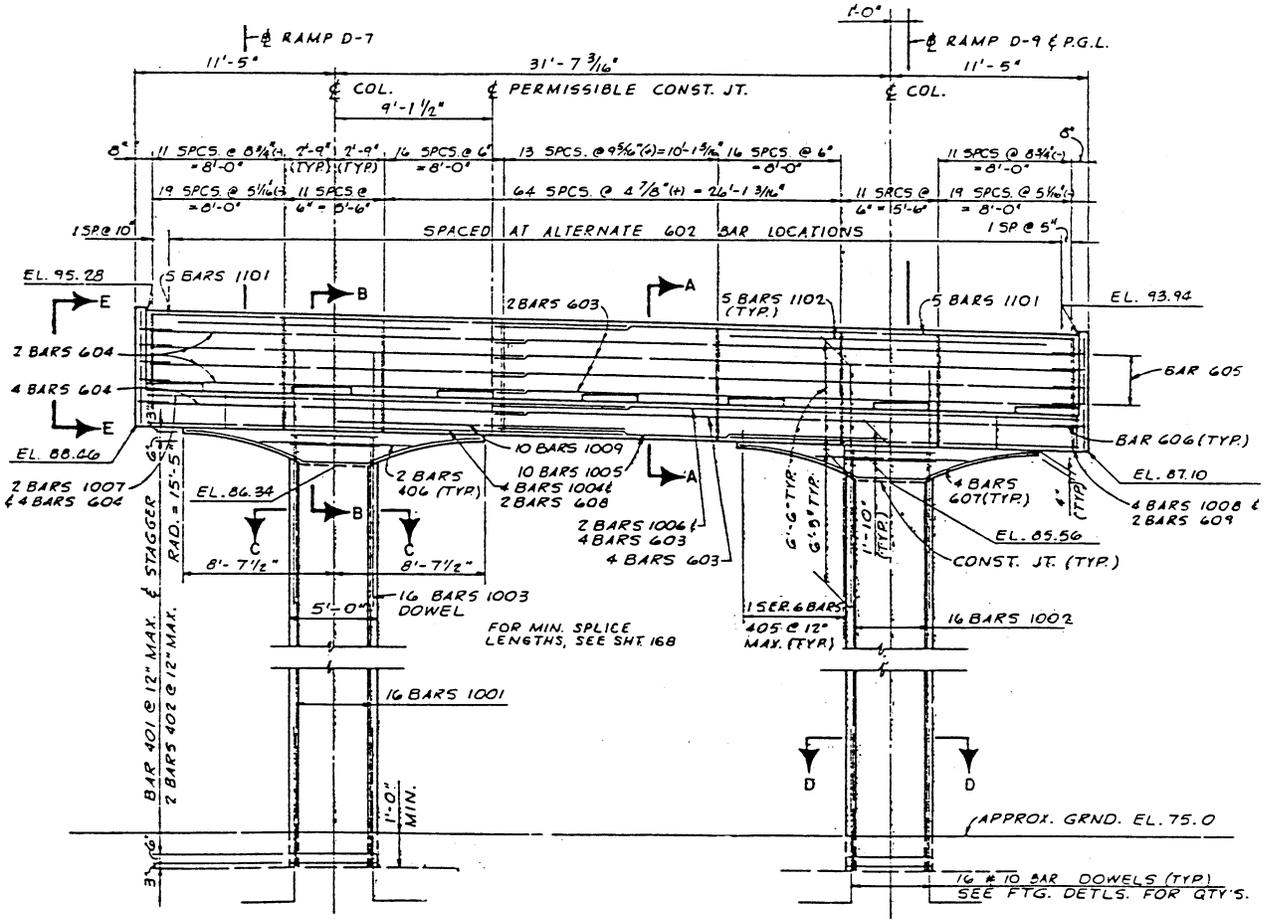


FIGURE 6-6 Louisiana Inverted T-Bent Cap Details

SECTION 7 FOOTING DETAILS ISSUES

7.1 Footing Design Details

Description: In Louisiana, the most common footings are pile supported, as shown in figures 7-1 and 7-2. Steel H-piles and timber piles are required to penetrate the bottom of the footing a minimum of 12". The minimum penetration requirement for concrete piles is 6". No positive pile tension anchorage is required. The minimum spacing of piles is 3'-0" for timber piles and 3 times the diameter (center to center) for concrete piles 18" and up. A minimum edge distance from the center of an outside pile to the face of the footing of 1'-6" is required. The exterior footing piles are sometimes battered to provide the necessary lateral support. Straps are sometimes used between isolated footings in a column bent to prevent differential horizontal movement on soft soil or where erosion is possible.

In North Carolina, the footings are either spread footings or pile footings, depending on the recommendations of the Soils Engineer. The minimum length for interior bent spread footings is 0.2 times the overall height from the bottom of footing to the crown of roadway to the next 6 inches. Minimum distance centerline to centerline of exterior piles for pile footings is 0.15 times the overall height from the bottom of footing to the crown of roadway to the next 3 inches. The minimum footing thickness in SPC A is 2 feet without piles, and 2 feet 6 inches with piles. SPC B requires increased footing thickness. The minimum pile penetration requirement into the footing is 9 inches. No positive pile tension anchorage is required. The minimum spacing of piles is 2'-6" for timber or steel piles, and 2'-9" for 12" concrete piles. A minimum of 4 piles per footing is required for pile foundations. If less than six piles are used, all piles are required to be vertical. Batter piles are used in footings with more than six piles (see figure 7-3). Struts between footings are required when foundation piles are used with laterally battered columns.

In Pennsylvania and New York, spread type individual and continuous footings are more common. Continuous footings are used whenever settlement of any magnitude is possible (see figure 7-8a).

7.2 Reinforcing Steel Details

Description: In Louisiana, footings are reinforced with a mat of steel 3" above the pile tops. The bar sizes are determined by design. Sometimes the reinforcing steel is placed between piles. Vertical dowels anchored into the footing extend into the column. The dowels are confined in the footing area by a minimum of 4 ties. The length of the dowels above the footing is determined based on the AASHTO Specifications splice length requirements. No reinforcement is required for the top of the footing and no shear stirrups are required in the

footing. In special design cases top footing reinforcement and shear stirrups are provided to increase footing capacity. Shear keys at the construction joints between the column and the footing are no longer required and the shear transfer capacity is determined based on dowel action and friction on a roughened concrete surface as per AASHTO Specifications.


To provide for earthquake forces, North Carolina requires top footing reinforcement consisting of No. 6 bars at 12-inch centers, except in single column bents in which No. 6 bars at 12-inch centers or 50% the area of the bottom reinforcement, whichever is greater, is required. These bars are to be provided in both transverse and longitudinal directions. Confining ties for longitudinal column reinforcement are provided in SPC B footings (see figure 5-8).

A footing reinforcement layout typical to the Pennsylvania and New York seismic provisions for SPC B is shown in figure 7-9. The design and detailing requirements for piles are as per AASHTO Seismic Specification 6.3.1. New York also requires that the minimum top reinforcement for an individual footing be more than 50% of the area of the designed bottom reinforcement, but not less than No. 6 bars at 12-inch centers in the transverse and the longitudinal directions. The minimum top reinforcement for a continuous footing is required to be at least No. 6 bars at 12-inch centers in the transverse and the longitudinal directions. All top and bottom reinforcement and footing dowels are required to have 180 degree or 90 degree hooks. Both Pennsylvania and New York require that vertical stirrups connect the top and bottom mats at a maximum spacing of 48" in both directions. Representative footing reinforcing steel details are shown in figures 7-1 through 7-9.

Advantages: The requirements for minimum footing width and minimum pile spacing provide for minimum bent stability. The requirement for confining ties in the footing improves the dowel pull out capacity. The requirement for top steel reinforcement prevents cracking of the footing, forcing plastic hinging of the column which is a more desirable failure mode. The top steel reinforcement and the confining ties in the footing also improve the column reinforcement pull out capacity.

Disadvantages: When the top of footings has no steel reinforcement, during severe seismic loading cracking in the footing may occur before column plastic hinging, which is an undesirable failure mode. Also, in a lightly reinforced footing the column vertical reinforcement is more likely to pull out of the footing.

Historical: This requirement for ties confining the footing dowels was introduced in the late 1970's as a result of general changes in bridge detailing in California brought about by the 1971 San Fernando earthquake.

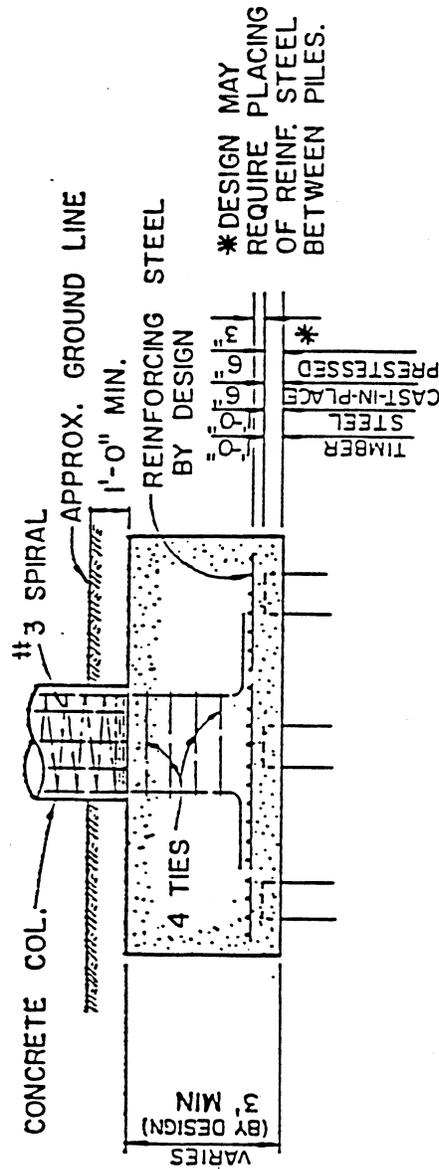

FOOTING	SHEET	CENTROID OF FOOTING		PILE GROUP PROPERTIES	PLAN AREAS		
		\bar{X} (FT.)	\bar{Y} (FT.)		CONCR (FT. ²)	EXCAVATION (FT. ²)	
TWO PILE	2 OF 5	3.500	1.500	N ²	I _{xx} (FT. ⁴)	I _{yy} (FT. ⁴)	
THREE "	2 OF 5	4.599	2.651	2	0.00	8.00	21.00
FOUR "	3 OF 5	3.500	3.500	3	8.00	8.00	32.72
FIVE "	3 OF 5	4.333	4.333	4	16.00	16.00	49.00
SIX "	4 OF 5	5.500	3.500	5	32.00	32.00	75.11
SEVEN "	4 OF 5	5.734	4.964	6	24.00	64.00	77.00
EIGHT "	5 OF 5	7.167	4.333	7	48.00	48.00	85.37
NINE "	5 OF 5	5.500	5.500	8	48.00	144.50	124.22
				9	96.00	96.00	121.00

DIMENSIONS SHOWN ARE MINIMUM

FIGURE 7-1 Louisiana Footing Detail Requirements



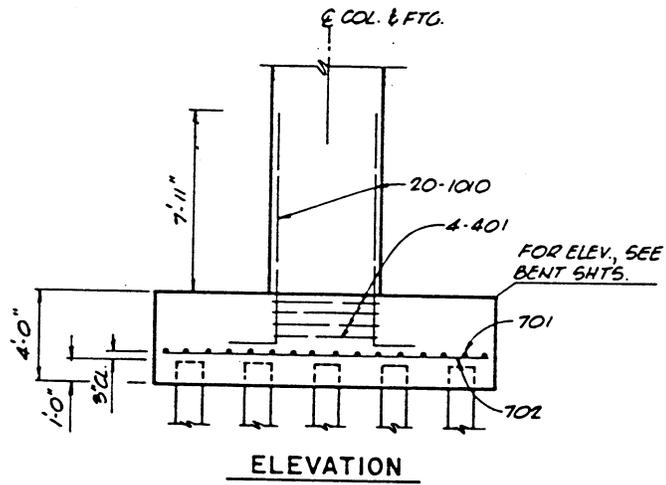


FIGURE 7-2 Louisiana Pile Supported Footing Details

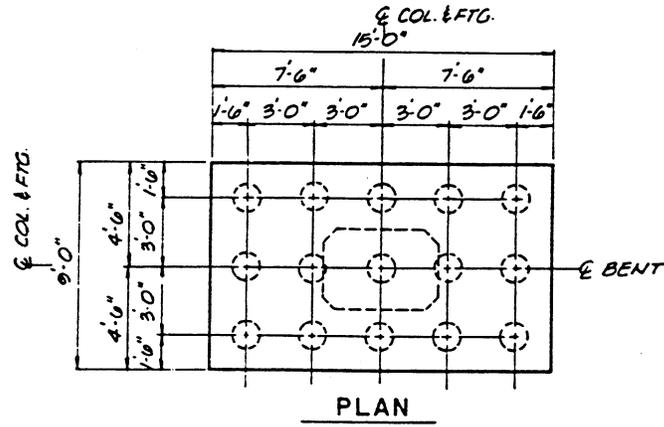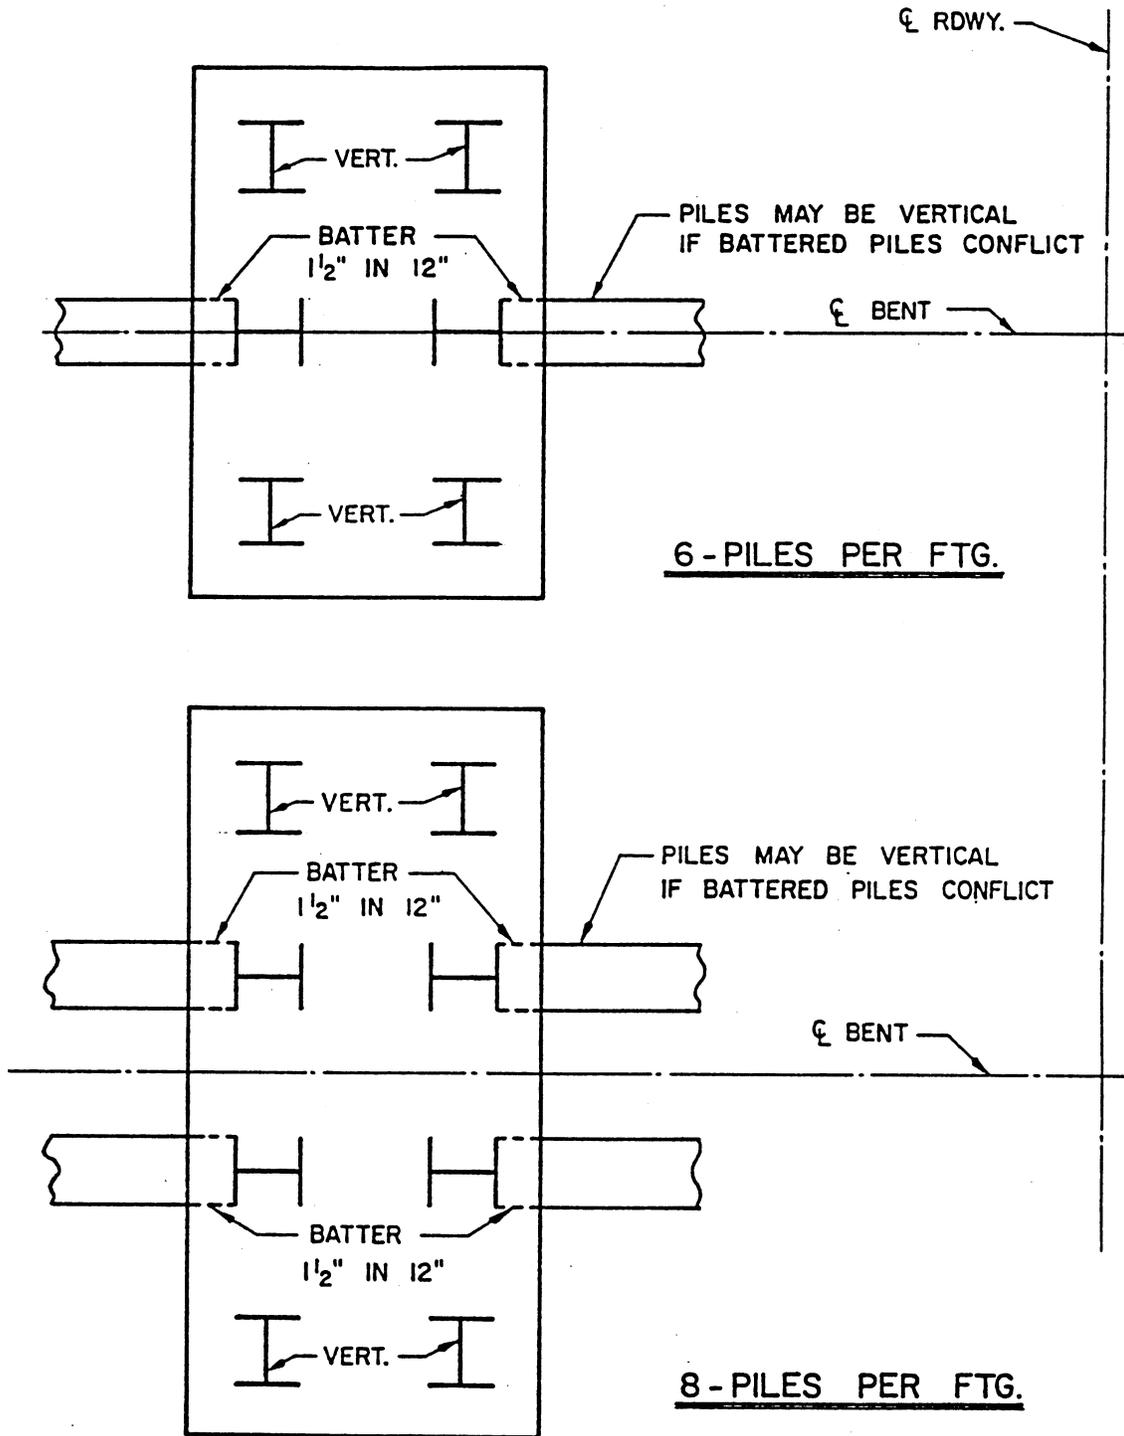

DETAILS SHOW STEEL PILES. DETAILS FOR TIMBER
AND CONCRETE PILES SIMILAR.

FIGURE 7-3 North Carolina Footing Detail Requirements

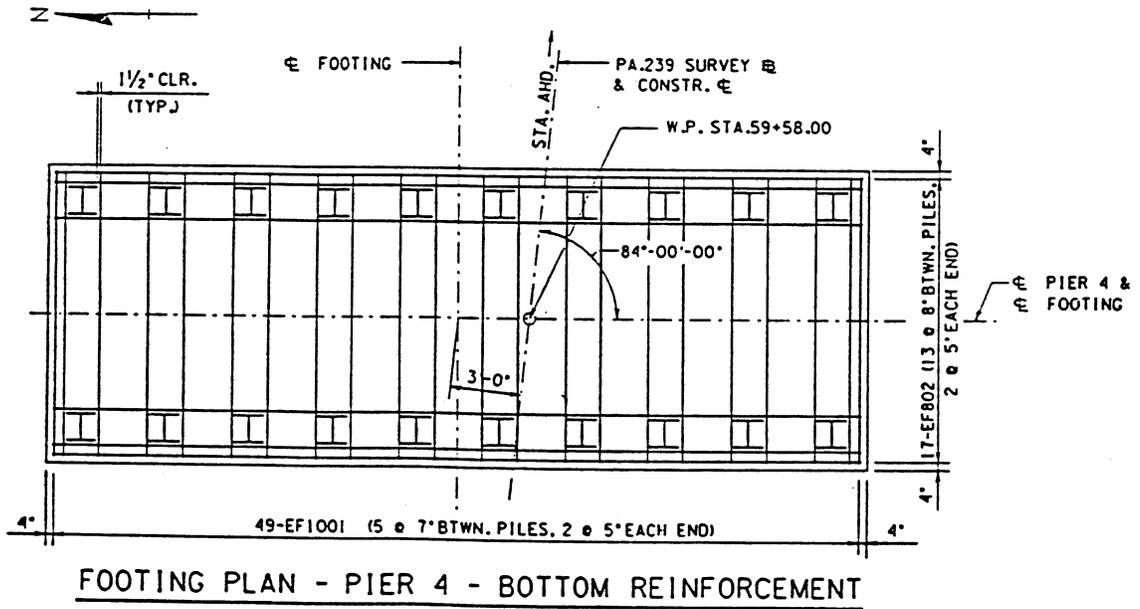
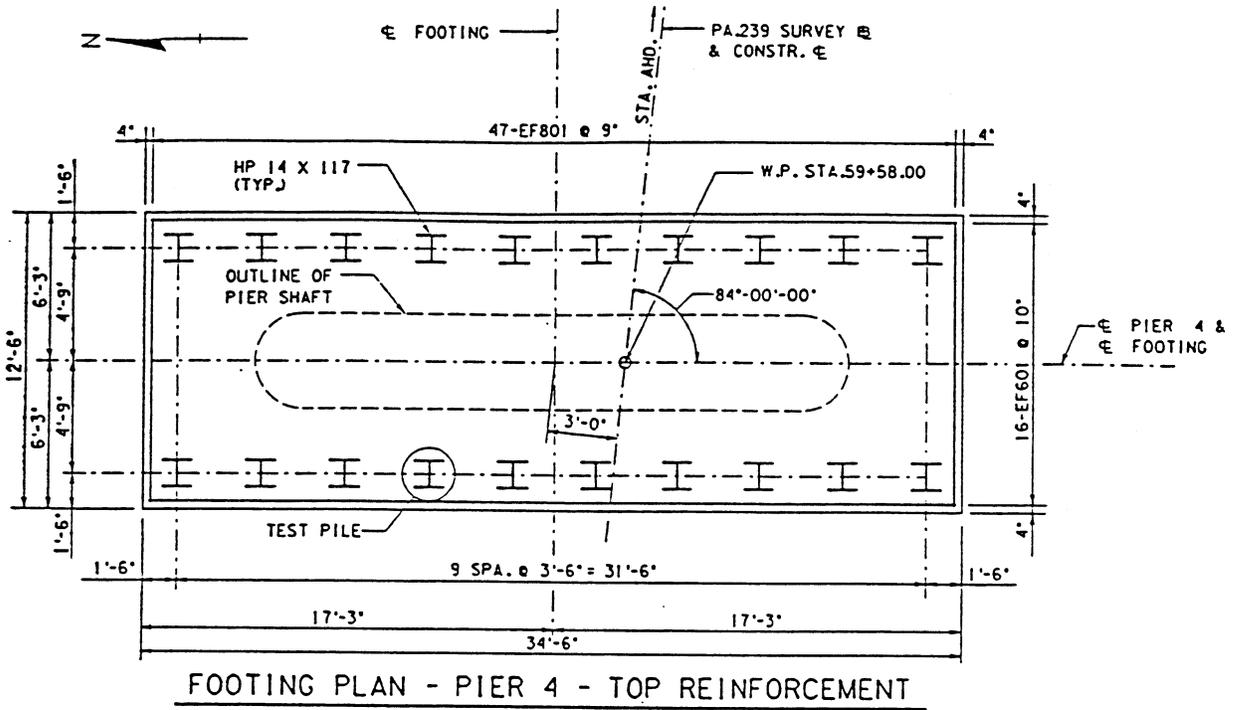


FIGURE 7-5 Pennsylvania Footing Details A

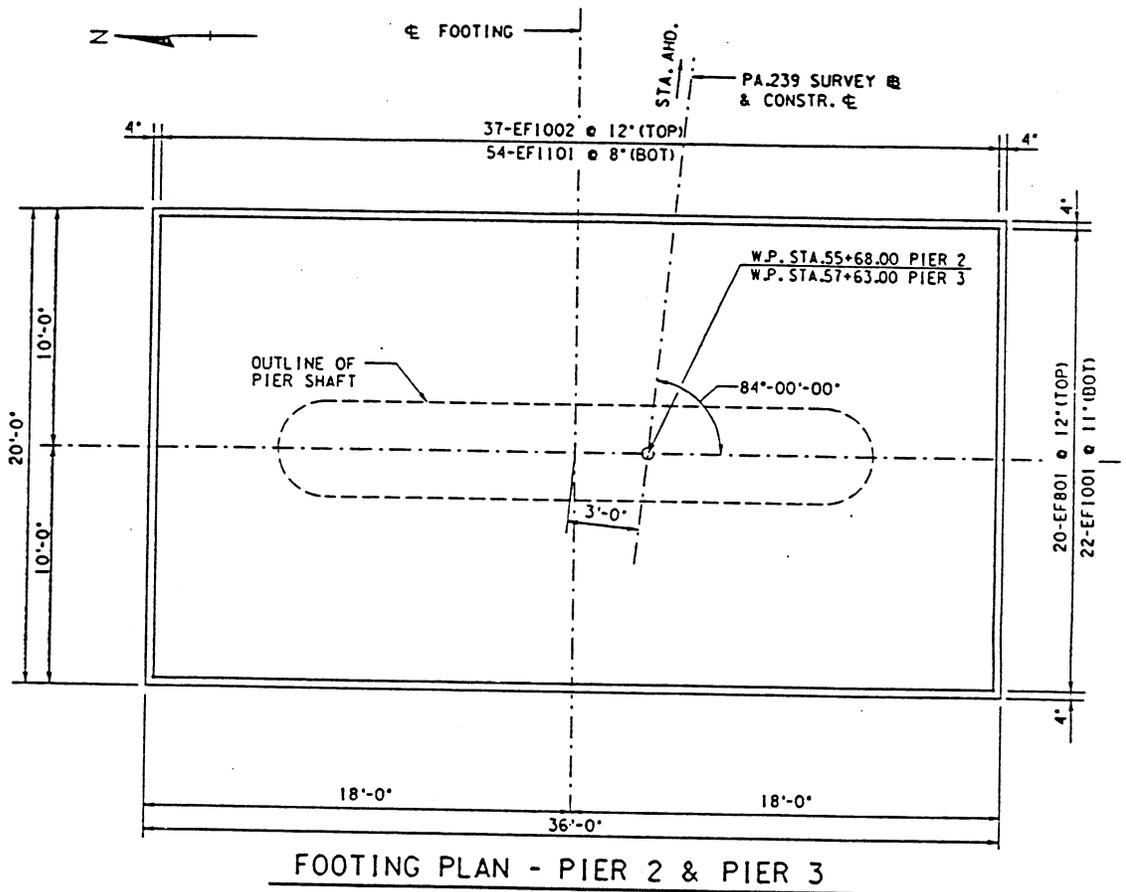


FIGURE 7-6 Pennsylvania Footing Details B

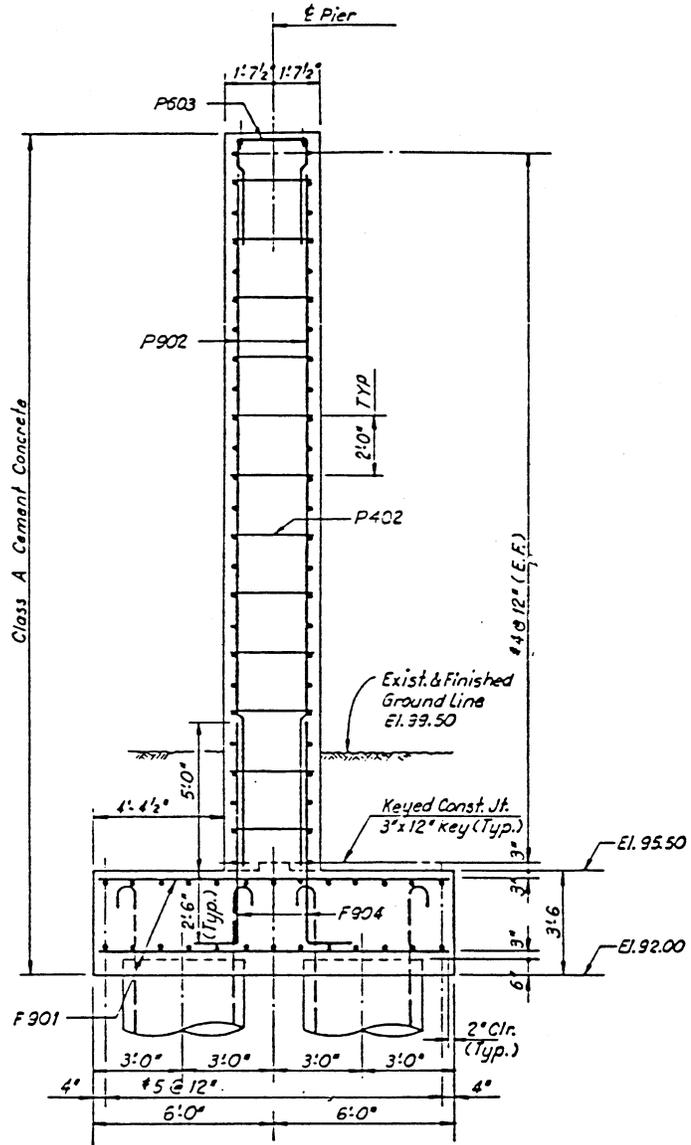


FIGURE 7-7 Pennsylvania Pier Wall Footing Details

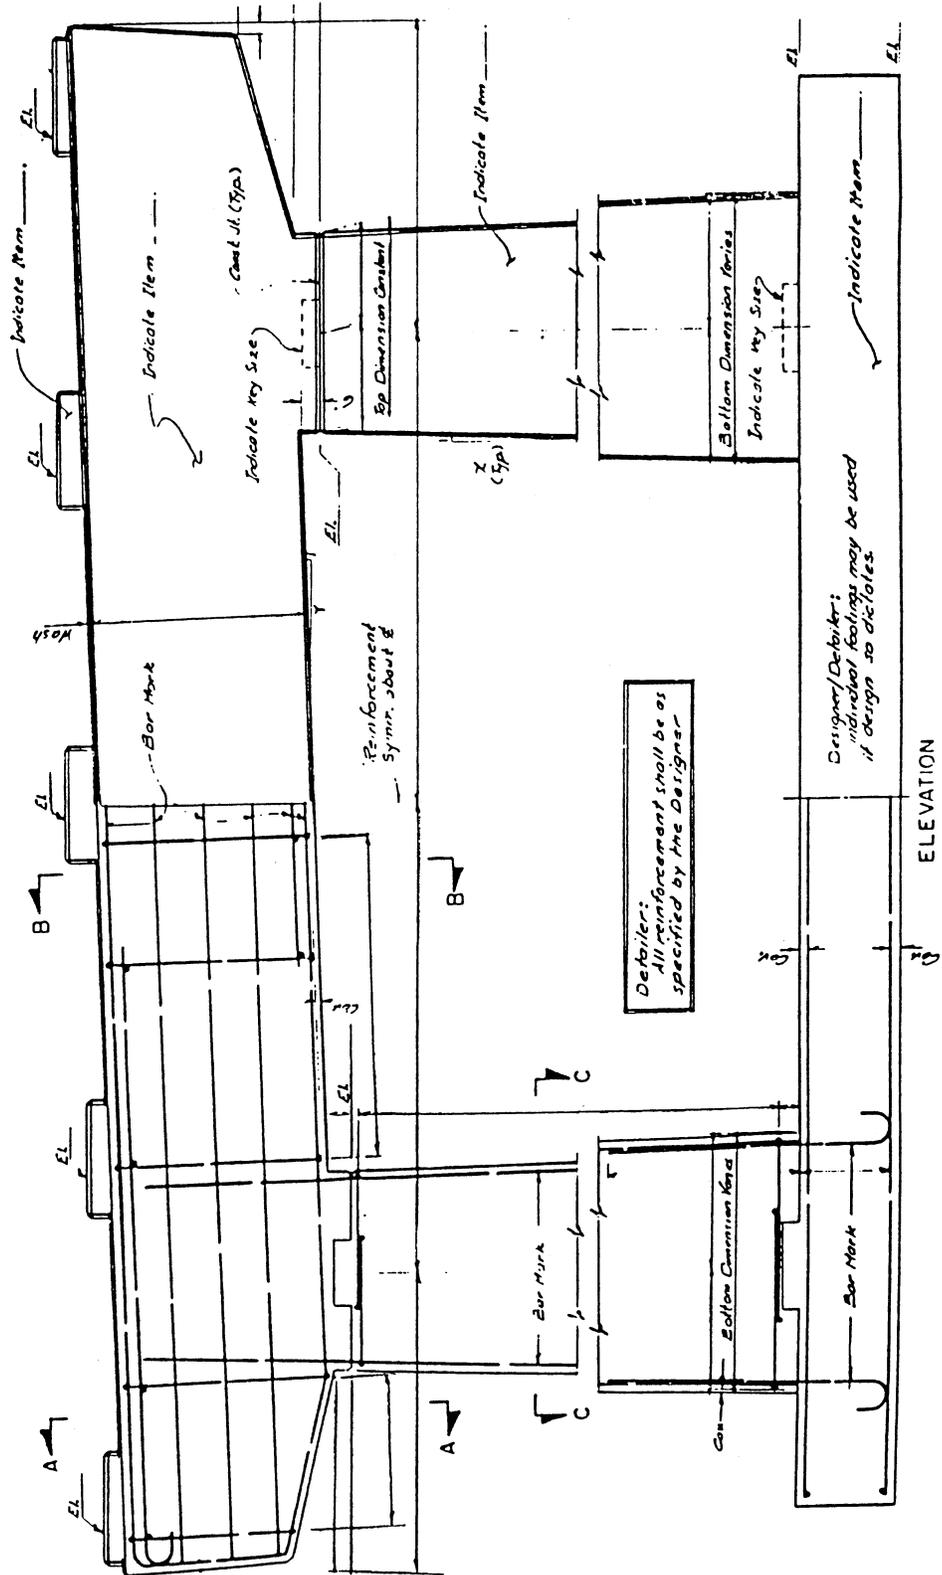


FIGURE 7-8a New York Column Bent with Continuous Footing - Elevation




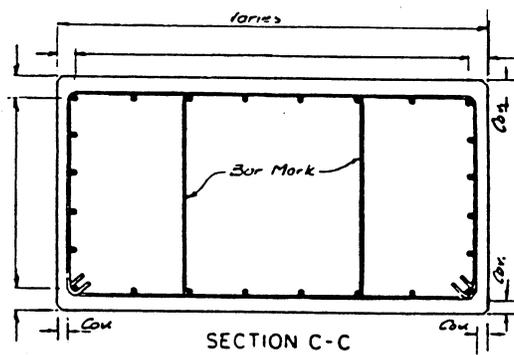


FIGURE 7-8b New York Column Bent with Continuous Footing - Cross Section

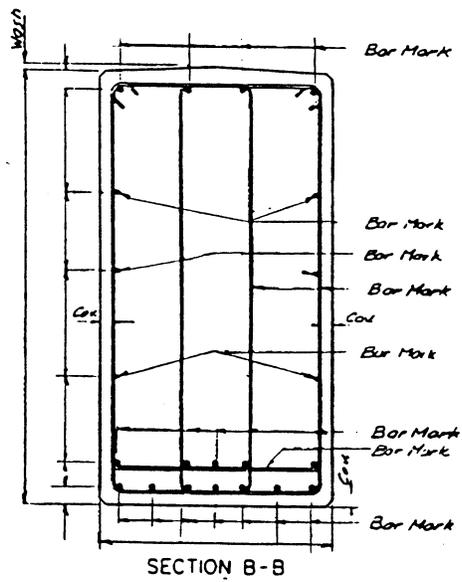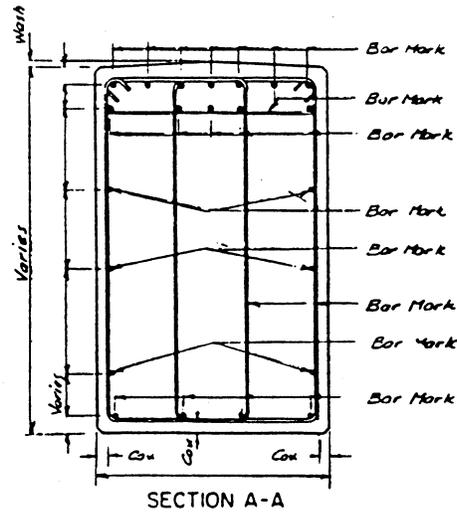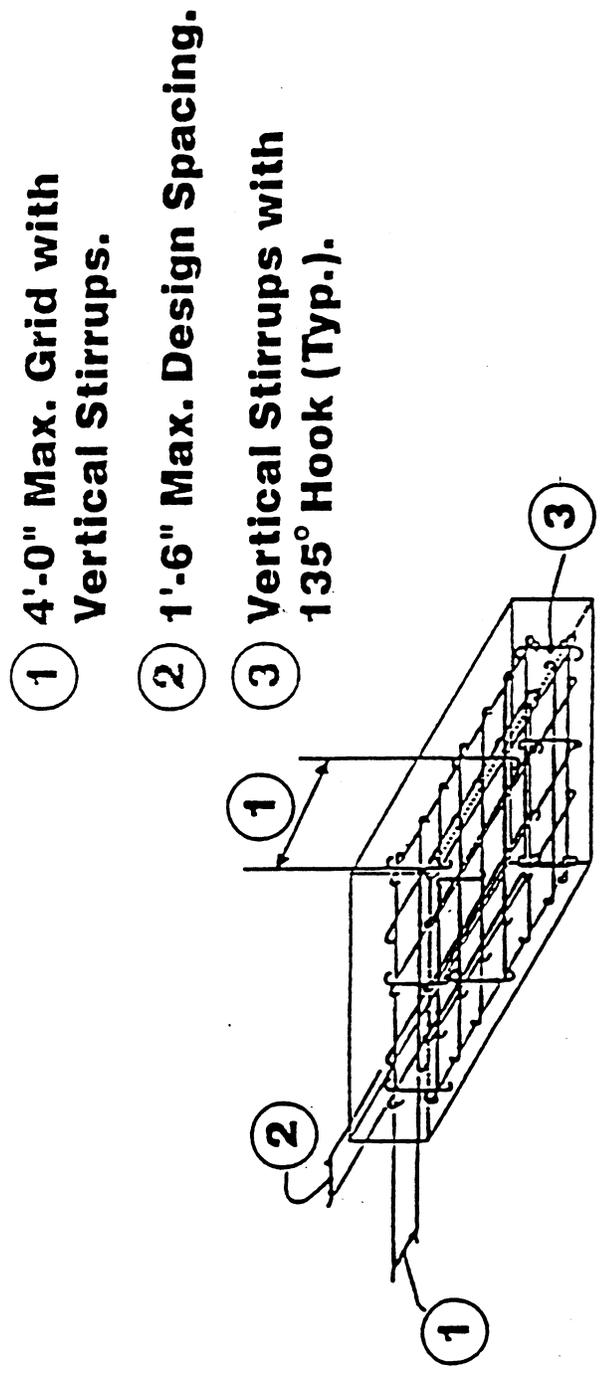

① 4'-0" Max. Grid with Vertical Stirrups.

② 1'-6" Max. Design Spacing.

③ Vertical Stirrups with 135° Hook (Typ.).

**Footing Layout
(Typical for Abut. & Piers)**

FIGURE 7-9 New York Footing Layout Reinforcement Requirements

SECTION 8 CONCLUSIONS

The requirements for seismic design of bridges in the eastern states, which are in low to moderate seismic zones, are not as rigorous as the those used for the design of western bridges. Most bridges in the east fall in Seismic Performance Categories A and B which have fewer, and less rigorous, seismic design and detailing requirements. Most bridges in the west fall in Seismic Performance Categories C and D, where more stringent design and detailing provisions apply.

Seismic design of bridges in the eastern United States currently follows the AASHTO Specifications for Seismic Design of Highway Bridges in conjunction with state specific policies designed to address the unique conditions of each state. Both the AASHTO seismic specifications and the state policies are constantly refined and updated as technical knowledge becomes available. The bridge engineering community in the east has become aware of the nature of the seismic hazard in the central and eastern United States where a very large magnitude earthquake, larger than the design earthquake, could occur. Engineers in the east have also become aware of the need to provide reinforcement details that would enhance the ductility capacity of bridges, even in regions of low seismicity where seismic loads may not govern lateral load performance and the AASHTO requirements for seismic design are not very stringent. Therefore, future bridge design and detailing practices in the east and in the west will have more and more elements in common. At present, similar detailing practices may be found in superstructures of the same construction type (e.g., concrete box girders), in bent caps, and to some extent in footings and pier walls. Changes made by several eastern states in detailing requirements for SPC B, which pertain to the confinement of longitudinal column reinforcement in plastic hinge regions, the extension of column reinforcement into bent caps and footings and the provision of top reinforcement in footings will increase the similarities between east and in the west construction details.

Historically, the development of criteria for seismic design in the east has followed the developments in the west which has already experienced several damaging earthquakes. It was only in 1983 that comprehensive seismic criteria have been included as an Alternate Guide Specification in the AASHTO Specifications, which were adopted by AASHTO in 1991. After the 1989 Loma Prieta earthquake, states like Pennsylvania and New York have made conservative adjustments to the AASHTO requirements for SPC B to improve resistance to seismic loading and reduce the potential of catastrophic bridge failure. These adjustments have resulted in a minimal increase in construction costs.

In the past, most of the bridge designs in the east were made in accordance with previous standards under which horizontal design loadings were mostly governed by wind, centrifugal or braking forces.

The bridge pier types, details and issues outlined in this report are representative of the practices and seismic policies in the Eastern U.S. In some cases, past practice has also been discussed. Typical highway bridge designs in the east are different from those in the west. In the east, most bridge steel or concrete superstructures are supported on piers and single or multi column bents through bearings. Many of the western bridges have concrete superstructures that are cast monolithically with single or multi column bents. The bridge pier types included in the report have been divided into pile bents, column bents and solid wall piers. They reflect design and construction practices in Louisiana, North Carolina, Pennsylvania and New York. Many detailing practices in these states are similar, but some pier types and details are more common in some states than others. In Louisiana, for example inverted T-caps are very common in current designs and spiral reinforcement in round columns is a standard detail. Hammerhead caps and continuous footings are more common in Pennsylvania and New York. North Carolina has standard steel pile bent details. Pile bents have been addressed separately since they are more common in the east, and the nature of their response to seismic loads is different. In the past, seismic considerations have not been included in the design of pile bents in the east. The seismic design of column bents, however, has been emphasized in design codes, especially after the 1971 San Fernando earthquake when many column bents were damaged. The seismic design and detailing of pier walls is different and the report emphasizes the unique nature of the seismic response of partial height walls. Design and detailing requirements for pile bents, column bents and pier walls are outlined and example details from actual designs are included. Some of these examples comply with the current seismic provisions, while others represent older designs made before these requirements were introduced.

SECTION 9 REFERENCES

AASHTO (1992), "Standard Specifications for Highway Bridges," 15th Ed., American Association of State Highway and Transportation Officials, Washington D.C.

AASHTO (1992), "Standard Specifications for Seismic Design of Highway Bridges (Supplement A)," American Association of State Highway and Transportation Officials, Washington D.C.

Louisiana Bridge Plans (1976), "South Approach (West Bank) Mississippi River Bridge (Luling)."

Louisiana Bridge Plans (1987), "I-10 Interchange - Route I-310."

Louisiana Bridge Plans (1989), "Alexandria Urban Section 11C Pineville Expressway Approaches Route I-49."

Louisiana Bridge Plans (1994), "Red River Bridge Alexandria - Pineville Expressway (Southbound) LA 28/US 167."

Louisiana Department of Transportation and Development (1987), "Bridge Design Manual," with 1994 revisions.

Louisiana Department of Transportation and Development (1991), "Seismic Policy for Bridges, Memorandum No. 73 of June 1991."

Mander, J.B., Waheed, S.M., Chaudhary, M.T.A. and Chen, S.S. (1993), "Seismic Performance of Shear-Critical Reinforced Concrete Bridge Piers," Technical Report NCEER-93-0010, National Center for Earthquake Engineering Research, SUNY at Buffalo.

New York State Department of Transportation (1982), "Sample Details - Substructure"

New York State Department of Transportation (1990), "Standard Specifications for Highway Bridge Design - Seismic Criteria," Engineering Instruction Letter of March 1990.

New York State Department of Transportation (1992), "Seismic Criteria - Bridge Rehabilitation Projects," Engineering Instruction Letter of Oct. 1992.

North Carolina Bridge Plans (1980), "Bridge over South Fork Catawba River US 321 in High Shoals."

North Carolina Department of Transportation (1984), "Design Manual, Structure Design, with June 1994 revisions.

Pennsylvania Bridge Plans (1987), "Philadelphia County, S.R. 0030, Sec. 02B, over Amtrak R.R. and Conrail R.R."

Pennsylvania Bridge Plans (1988), "Lancaster County, S.R. 0625, Sec. B02, over Conestoga River."

Pennsylvania Bridge Plans (1988), "Luzerne County, S.R. 0239, Sec. 350, over North Branch Susquehanna River."

Pennsylvania Department of Transportation (1982), "Design Manual, Part 4, Piers" and "Appendix A - Guidelines for Seismic Design of Highway Bridges for Pennsylvania."

Pennsylvania Department of Transportation (1992), "Seismic Design and Rehabilitation Policy, Strike-Off-Letter of Dec. 1992.

**NATIONAL CENTER FOR EARTHQUAKE ENGINEERING RESEARCH
LIST OF TECHNICAL REPORTS**

The National Center for Earthquake Engineering Research (NCEER) publishes technical reports on a variety of subjects related to earthquake engineering written by authors funded through NCEER. These reports are available from both NCEER Publications and the National Technical Information Service (NTIS). Requests for reports should be directed to NCEER Publications, National Center for Earthquake Engineering Research, State University of New York at Buffalo, Red Jacket Quadrangle, Buffalo, New York 14261. Reports can also be requested through NTIS, 5285 Port Royal Road, Springfield, Virginia 22161. NTIS accession numbers are shown in parenthesis, if available.

- NCEER-87-0001 "First-Year Program in Research, Education and Technology Transfer," 3/5/87, (PB88-134275, A04, MF-A01).
- NCEER-87-0002 "Experimental Evaluation of Instantaneous Optimal Algorithms for Structural Control," by R.C. Lin, T.T. Soong and A.M. Reinhorn, 4/20/87, (PB88-134341, A04, MF-A01).
- NCEER-87-0003 "Experimentation Using the Earthquake Simulation Facilities at University at Buffalo," by A.M. Reinhorn and R.L. Ketter, to be published.
- NCEER-87-0004 "The System Characteristics and Performance of a Shaking Table," by J.S. Hwang, K.C. Chang and G.C. Lee, 6/1/87, (PB88-134259, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0005 "A Finite Element Formulation for Nonlinear Viscoplastic Material Using a Q Model," by O. Gyebe and G. Dasgupta, 11/2/87, (PB88-213764, A08, MF-A01).
- NCEER-87-0006 "Symbolic Manipulation Program (SMP) - Algebraic Codes for Two and Three Dimensional Finite Element Formulations," by X. Lee and G. Dasgupta, 11/9/87, (PB88-218522, A05, MF-A01).
- NCEER-87-0007 "Instantaneous Optimal Control Laws for Tall Buildings Under Seismic Excitations," by J.N. Yang, A. Akbarpour and P. Ghaemmaghami, 6/10/87, (PB88-134333, A06, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0008 "IDARC: Inelastic Damage Analysis of Reinforced Concrete Frame - Shear-Wall Structures," by Y.J. Park, A.M. Reinhorn and S.K. Kunnath, 7/20/87, (PB88-134325, A09, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0009 "Liquefaction Potential for New York State: A Preliminary Report on Sites in Manhattan and Buffalo," by M. Budhu, V. Vijayakumar, R.F. Giese and L. Baumgras, 8/31/87, (PB88-163704, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0010 "Vertical and Torsional Vibration of Foundations in Inhomogeneous Media," by A.S. Veletsos and K.W. Dotson, 6/1/87, (PB88-134291, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0011 "Seismic Probabilistic Risk Assessment and Seismic Margins Studies for Nuclear Power Plants," by Howard H.M. Hwang, 6/15/87, (PB88-134267, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0012 "Parametric Studies of Frequency Response of Secondary Systems Under Ground-Acceleration Excitations," by Y. Yong and Y.K. Lin, 6/10/87, (PB88-134309, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0013 "Frequency Response of Secondary Systems Under Seismic Excitation," by J.A. HoLung, J. Cai and Y.K. Lin, 7/31/87, (PB88-134317, A05, MF-A01). This report is only available through NTIS (see address given above).

- NCEER-87-0014 "Modelling Earthquake Ground Motions in Seismically Active Regions Using Parametric Time Series Methods," by G.W. Ellis and A.S. Cakmak, 8/25/87, (PB88-134283, A08, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0015 "Detection and Assessment of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 8/25/87, (PB88-163712, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0016 "Pipeline Experiment at Parkfield, California," by J. Isenberg and E. Richardson, 9/15/87, (PB88-163720, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0017 "Digital Simulation of Seismic Ground Motion," by M. Shinozuka, G. Deodatis and T. Harada, 8/31/87, (PB88-155197, A04, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0018 "Practical Considerations for Structural Control: System Uncertainty, System Time Delay and Truncation of Small Control Forces," J.N. Yang and A. Akbarpour, 8/10/87, (PB88-163738, A08, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0019 "Modal Analysis of Nonclassically Damped Structural Systems Using Canonical Transformation," by J.N. Yang, S. Sarkani and F.X. Long, 9/27/87, (PB88-187851, A04, MF-A01).
- NCEER-87-0020 "A Nonstationary Solution in Random Vibration Theory," by J.R. Red-Horse and P.D. Spanos, 11/3/87, (PB88-163746, A03, MF-A01).
- NCEER-87-0021 "Horizontal Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by A.S. Veletsos and K.W. Dotson, 10/15/87, (PB88-150859, A04, MF-A01).
- NCEER-87-0022 "Seismic Damage Assessment of Reinforced Concrete Members," by Y.S. Chung, C. Meyer and M. Shinozuka, 10/9/87, (PB88-150867, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0023 "Active Structural Control in Civil Engineering," by T.T. Soong, 11/11/87, (PB88-187778, A03, MF-A01).
- NCEER-87-0024 "Vertical and Torsional Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by K.W. Dotson and A.S. Veletsos, 12/87, (PB88-187786, A03, MF-A01).
- NCEER-87-0025 "Proceedings from the Symposium on Seismic Hazards, Ground Motions, Soil-Liquefaction and Engineering Practice in Eastern North America," October 20-22, 1987, edited by K.H. Jacob, 12/87, (PB88-188115, A23, MF-A01).
- NCEER-87-0026 "Report on the Whittier-Narrows, California, Earthquake of October 1, 1987," by J. Pantelic and A. Reinhorn, 11/87, (PB88-187752, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0027 "Design of a Modular Program for Transient Nonlinear Analysis of Large 3-D Building Structures," by S. Srivastav and J.F. Abel, 12/30/87, (PB88-187950, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0028 "Second-Year Program in Research, Education and Technology Transfer," 3/8/88, (PB88-219480, A04, MF-A01).
- NCEER-88-0001 "Workshop on Seismic Computer Analysis and Design of Buildings With Interactive Graphics," by W. McGuire, J.F. Abel and C.H. Conley, 1/18/88, (PB88-187760, A03, MF-A01). This report is only available through NTIS (see address given above).

- NCEER-88-0002 "Optimal Control of Nonlinear Flexible Structures," by J.N. Yang, F.X. Long and D. Wong, 1/22/88, (PB88-213772, A06, MF-A01).
- NCEER-88-0003 "Substructuring Techniques in the Time Domain for Primary-Secondary Structural Systems," by G.D. Manolis and G. Juhn, 2/10/88, (PB88-213780, A04, MF-A01).
- NCEER-88-0004 "Iterative Seismic Analysis of Primary-Secondary Systems," by A. Singhal, L.D. Lutes and P.D. Spanos, 2/23/88, (PB88-213798, A04, MF-A01).
- NCEER-88-0005 "Stochastic Finite Element Expansion for Random Media," by P.D. Spanos and R. Ghanem, 3/14/88, (PB88-213806, A03, MF-A01).
- NCEER-88-0006 "Combining Structural Optimization and Structural Control," by F.Y. Cheng and C.P. Pantelides, 1/10/88, (PB88-213814, A05, MF-A01).
- NCEER-88-0007 "Seismic Performance Assessment of Code-Designed Structures," by H.H-M. Hwang, J-W. Jaw and H-J. Shau, 3/20/88, (PB88-219423, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0008 "Reliability Analysis of Code-Designed Structures Under Natural Hazards," by H.H-M. Hwang, H. Ushiba and M. Shinozuka, 2/29/88, (PB88-229471, A07, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0009 "Seismic Fragility Analysis of Shear Wall Structures," by J-W Jaw and H.H-M. Hwang, 4/30/88, (PB89-102867, A04, MF-A01).
- NCEER-88-0010 "Base Isolation of a Multi-Story Building Under a Harmonic Ground Motion - A Comparison of Performances of Various Systems," by F-G Fan, G. Ahmadi and I.G. Tadjbakhsh, 5/18/88, (PB89-122238, A06, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0011 "Seismic Floor Response Spectra for a Combined System by Green's Functions," by F.M. Lavelle, L.A. Bergman and P.D. Spanos, 5/1/88, (PB89-102875, A03, MF-A01).
- NCEER-88-0012 "A New Solution Technique for Randomly Excited Hysteretic Structures," by G.Q. Cai and Y.K. Lin, 5/16/88, (PB89-102883, A03, MF-A01).
- NCEER-88-0013 "A Study of Radiation Damping and Soil-Structure Interaction Effects in the Centrifuge," by K. Weissman, supervised by J.H. Prevost, 5/24/88, (PB89-144703, A06, MF-A01).
- NCEER-88-0014 "Parameter Identification and Implementation of a Kinematic Plasticity Model for Frictional Soils," by J.H. Prevost and D.V. Griffiths, to be published.
- NCEER-88-0015 "Two- and Three- Dimensional Dynamic Finite Element Analyses of the Long Valley Dam," by D.V. Griffiths and J.H. Prevost, 6/17/88, (PB89-144711, A04, MF-A01).
- NCEER-88-0016 "Damage Assessment of Reinforced Concrete Structures in Eastern United States," by A.M. Reinhorn, M.J. Seidel, S.K. Kunnath and Y.J. Park, 6/15/88, (PB89-122220, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0017 "Dynamic Compliance of Vertically Loaded Strip Foundations in Multilayered Viscoelastic Soils," by S. Ahmad and A.S.M. Israil, 6/17/88, (PB89-102891, A04, MF-A01).
- NCEER-88-0018 "An Experimental Study of Seismic Structural Response With Added Viscoelastic Dampers," by R.C. Lin, Z. Liang, T.T. Soong and R.H. Zhang, 6/30/88, (PB89-122212, A05, MF-A01). This report is available only through NTIS (see address given above).

- NCEER-88-0019 "Experimental Investigation of Primary - Secondary System Interaction," by G.D. Manolis, G. Juhn and A.M. Reinhorn, 5/27/88, (PB89-122204, A04, MF-A01).
- NCEER-88-0020 "A Response Spectrum Approach For Analysis of Nonclassically Damped Structures," by J.N. Yang, S. Sarkani and F.X. Long, 4/22/88, (PB89-102909, A04, MF-A01).
- NCEER-88-0021 "Seismic Interaction of Structures and Soils: Stochastic Approach," by A.S. Veletsos and A.M. Prasad, 7/21/88, (PB89-122196, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0022 "Identification of the Serviceability Limit State and Detection of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 6/15/88, (PB89-122188, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0023 "Multi-Hazard Risk Analysis: Case of a Simple Offshore Structure," by B.K. Bhartia and E.H. Vanmarcke, 7/21/88, (PB89-145213, A05, MF-A01).
- NCEER-88-0024 "Automated Seismic Design of Reinforced Concrete Buildings," by Y.S. Chung, C. Meyer and M. Shinozuka, 7/5/88, (PB89-122170, A06, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0025 "Experimental Study of Active Control of MDOF Structures Under Seismic Excitations," by L.L. Chung, R.C. Lin, T.T. Soong and A.M. Reinhorn, 7/10/88, (PB89-122600, A04, MF-A01).
- NCEER-88-0026 "Earthquake Simulation Tests of a Low-Rise Metal Structure," by J.S. Hwang, K.C. Chang, G.C. Lee and R.L. Ketter, 8/1/88, (PB89-102917, A04, MF-A01).
- NCEER-88-0027 "Systems Study of Urban Response and Reconstruction Due to Catastrophic Earthquakes," by F. Kozin and H.K. Zhou, 9/22/88, (PB90-162348, A04, MF-A01).
- NCEER-88-0028 "Seismic Fragility Analysis of Plane Frame Structures," by H.H-M. Hwang and Y.K. Low, 7/31/88, (PB89-131445, A06, MF-A01).
- NCEER-88-0029 "Response Analysis of Stochastic Structures," by A. Kardara, C. Bucher and M. Shinozuka, 9/22/88, (PB89-174429, A04, MF-A01).
- NCEER-88-0030 "Nonnormal Accelerations Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 9/19/88, (PB89-131437, A04, MF-A01).
- NCEER-88-0031 "Design Approaches for Soil-Structure Interaction," by A.S. Veletsos, A.M. Prasad and Y. Tang, 12/30/88, (PB89-174437, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0032 "A Re-evaluation of Design Spectra for Seismic Damage Control," by C.J. Turkstra and A.G. Tallin, 11/7/88, (PB89-145221, A05, MF-A01).
- NCEER-88-0033 "The Behavior and Design of Noncontact Lap Splices Subjected to Repeated Inelastic Tensile Loading," by V.E. Sagan, P. Gergely and R.N. White, 12/8/88, (PB89-163737, A08, MF-A01).
- NCEER-88-0034 "Seismic Response of Pile Foundations," by S.M. Mamoon, P.K. Banerjee and S. Ahmad, 11/1/88, (PB89-145239, A04, MF-A01).
- NCEER-88-0035 "Modeling of R/C Building Structures With Flexible Floor Diaphragms (IDARC2)," by A.M. Reinhorn, S.K. Kunnath and N. Panahshahi, 9/7/88, (PB89-207153, A07, MF-A01).

- NCEER-88-0036 "Solution of the Dam-Reservoir Interaction Problem Using a Combination of FEM, BEM with Particular Integrals, Modal Analysis, and Substructuring," by C-S. Tsai, G.C. Lee and R.L. Ketter, 12/31/88, (PB89-207146, A04, MF-A01).
- NCEER-88-0037 "Optimal Placement of Actuators for Structural Control," by F.Y. Cheng and C.P. Pantelides, 8/15/88, (PB89-162846, A05, MF-A01).
- NCEER-88-0038 "Teflon Bearings in Aseismic Base Isolation: Experimental Studies and Mathematical Modeling," by A. Mokha, M.C. Constantinou and A.M. Reinhorn, 12/5/88, (PB89-218457, A10, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0039 "Seismic Behavior of Flat Slab High-Rise Buildings in the New York City Area," by P. Weidlinger and M. Ettouney, 10/15/88, (PB90-145681, A04, MF-A01).
- NCEER-88-0040 "Evaluation of the Earthquake Resistance of Existing Buildings in New York City," by P. Weidlinger and M. Ettouney, 10/15/88, to be published.
- NCEER-88-0041 "Small-Scale Modeling Techniques for Reinforced Concrete Structures Subjected to Seismic Loads," by W. Kim, A. El-Attar and R.N. White, 11/22/88, (PB89-189625, A05, MF-A01).
- NCEER-88-0042 "Modeling Strong Ground Motion from Multiple Event Earthquakes," by G.W. Ellis and A.S. Cakmak, 10/15/88, (PB89-174445, A03, MF-A01).
- NCEER-88-0043 "Nonstationary Models of Seismic Ground Acceleration," by M. Grigoriu, S.E. Ruiz and E. Rosenblueth, 7/15/88, (PB89-189617, A04, MF-A01).
- NCEER-88-0044 "SARCF User's Guide: Seismic Analysis of Reinforced Concrete Frames," by Y.S. Chung, C. Meyer and M. Shinozuka, 11/9/88, (PB89-174452, A08, MF-A01).
- NCEER-88-0045 "First Expert Panel Meeting on Disaster Research and Planning," edited by J. Pantelic and J. Stoye, 9/15/88, (PB89-174460, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0046 "Preliminary Studies of the Effect of Degrading Infill Walls on the Nonlinear Seismic Response of Steel Frames," by C.Z. Chrysostomou, P. Gergely and J.F. Abel, 12/19/88, (PB89-208383, A05, MF-A01).
- NCEER-88-0047 "Reinforced Concrete Frame Component Testing Facility - Design, Construction, Instrumentation and Operation," by S.P. Pessiki, C. Conley, T. Bond, P. Gergely and R.N. White, 12/16/88, (PB89-174478, A04, MF-A01).
- NCEER-89-0001 "Effects of Protective Cushion and Soil Compliancy on the Response of Equipment Within a Seismically Excited Building," by J.A. HoLung, 2/16/89, (PB89-207179, A04, MF-A01).
- NCEER-89-0002 "Statistical Evaluation of Response Modification Factors for Reinforced Concrete Structures," by H.H-M. Hwang and J-W. Jaw, 2/17/89, (PB89-207187, A05, MF-A01).
- NCEER-89-0003 "Hysteretic Columns Under Random Excitation," by G-Q. Cai and Y.K. Lin, 1/9/89, (PB89-196513, A03, MF-A01).
- NCEER-89-0004 "Experimental Study of `Elephant Foot Bulge' Instability of Thin-Walled Metal Tanks," by Z-H. Jia and R.L. Ketter, 2/22/89, (PB89-207195, A03, MF-A01).
- NCEER-89-0005 "Experiment on Performance of Buried Pipelines Across San Andreas Fault," by J. Isenberg, E. Richardson and T.D. O'Rourke, 3/10/89, (PB89-218440, A04, MF-A01). This report is available only through NTIS (see address given above).

- NCEER-89-0006 "A Knowledge-Based Approach to Structural Design of Earthquake-Resistant Buildings," by M. Subramani, P. Gergely, C.H. Conley, J.F. Abel and A.H. Zaghw, 1/15/89, (PB89-218465, A06, MF-A01).
- NCEER-89-0007 "Liquefaction Hazards and Their Effects on Buried Pipelines," by T.D. O'Rourke and P.A. Lane, 2/1/89, (PB89-218481, A09, MF-A01).
- NCEER-89-0008 "Fundamentals of System Identification in Structural Dynamics," by H. Imai, C-B. Yun, O. Maruyama and M. Shinozuka, 1/26/89, (PB89-207211, A04, MF-A01).
- NCEER-89-0009 "Effects of the 1985 Michoacan Earthquake on Water Systems and Other Buried Lifelines in Mexico," by A.G. Ayala and M.J. O'Rourke, 3/8/89, (PB89-207229, A06, MF-A01).
- NCEER-89-R010 "NCEER Bibliography of Earthquake Education Materials," by K.E.K. Ross, Second Revision, 9/1/89, (PB90-125352, A05, MF-A01). This report is replaced by NCEER-92-0018.
- NCEER-89-0011 "Inelastic Three-Dimensional Response Analysis of Reinforced Concrete Building Structures (IDARC-3D), Part I - Modeling," by S.K. Kunnath and A.M. Reinhorn, 4/17/89, (PB90-114612, A07, MF-A01).
- NCEER-89-0012 "Recommended Modifications to ATC-14," by C.D. Poland and J.O. Malley, 4/12/89, (PB90-108648, A15, MF-A01).
- NCEER-89-0013 "Repair and Strengthening of Beam-to-Column Connections Subjected to Earthquake Loading," by M. Corazao and A.J. Durrani, 2/28/89, (PB90-109885, A06, MF-A01).
- NCEER-89-0014 "Program EXKAL2 for Identification of Structural Dynamic Systems," by O. Maruyama, C-B. Yun, M. Hoshiya and M. Shinozuka, 5/19/89, (PB90-109877, A09, MF-A01).
- NCEER-89-0015 "Response of Frames With Bolted Semi-Rigid Connections, Part I - Experimental Study and Analytical Predictions," by P.J. DiCorso, A.M. Reinhorn, J.R. Dickerson, J.B. Radzimirski and W.L. Harper, 6/1/89, to be published.
- NCEER-89-0016 "ARMA Monte Carlo Simulation in Probabilistic Structural Analysis," by P.D. Spanos and M.P. Mignolet, 7/10/89, (PB90-109893, A03, MF-A01).
- NCEER-89-P017 "Preliminary Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 6/23/89, (PB90-108606, A03, MF-A01).
- NCEER-89-0017 "Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 12/31/89, (PB90-207895, A012, MF-A02). This report is available only through NTIS (see address given above).
- NCEER-89-0018 "Multidimensional Models of Hysteretic Material Behavior for Vibration Analysis of Shape Memory Energy Absorbing Devices, by E.J. Graesser and F.A. Cozzarelli, 6/7/89, (PB90-164146, A04, MF-A01).
- NCEER-89-0019 "Nonlinear Dynamic Analysis of Three-Dimensional Base Isolated Structures (3D-BASIS)," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 8/3/89, (PB90-161936, A06, MF-A01). This report has been replaced by NCEER-93-0011.
- NCEER-89-0020 "Structural Control Considering Time-Rate of Control Forces and Control Rate Constraints," by F.Y. Cheng and C.P. Pantelides, 8/3/89, (PB90-120445, A04, MF-A01).
- NCEER-89-0021 "Subsurface Conditions of Memphis and Shelby County," by K.W. Ng, T-S. Chang and H-H.M. Hwang, 7/26/89, (PB90-120437, A03, MF-A01).
- NCEER-89-0022 "Seismic Wave Propagation Effects on Straight Jointed Buried Pipelines," by K. Elhmedi and M.J. O'Rourke, 8/24/89, (PB90-162322, A10, MF-A02).

- NCEER-89-0023 "Workshop on Serviceability Analysis of Water Delivery Systems," edited by M. Grigoriu, 3/6/89, (PB90-127424, A03, MF-A01).
- NCEER-89-0024 "Shaking Table Study of a 1/5 Scale Steel Frame Composed of Tapered Members," by K.C. Chang, J.S. Hwang and G.C. Lee, 9/18/89, (PB90-160169, A04, MF-A01).
- NCEER-89-0025 "DYNA1D: A Computer Program for Nonlinear Seismic Site Response Analysis - Technical Documentation," by Jean H. Prevost, 9/14/89, (PB90-161944, A07, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0026 "1:4 Scale Model Studies of Active Tendon Systems and Active Mass Dampers for Aseismic Protection," by A.M. Reinhorn, T.T. Soong, R.C. Lin, Y.P. Yang, Y. Fukao, H. Abe and M. Nakai, 9/15/89, (PB90-173246, A10, MF-A02).
- NCEER-89-0027 "Scattering of Waves by Inclusions in a Nonhomogeneous Elastic Half Space Solved by Boundary Element Methods," by P.K. Hadley, A. Askar and A.S. Cakmak, 6/15/89, (PB90-145699, A07, MF-A01).
- NCEER-89-0028 "Statistical Evaluation of Deflection Amplification Factors for Reinforced Concrete Structures," by H.H.M. Hwang, J-W. Jaw and A.L. Ch'ng, 8/31/89, (PB90-164633, A05, MF-A01).
- NCEER-89-0029 "Bedrock Accelerations in Memphis Area Due to Large New Madrid Earthquakes," by H.H.M. Hwang, C.H.S. Chen and G. Yu, 11/7/89, (PB90-162330, A04, MF-A01).
- NCEER-89-0030 "Seismic Behavior and Response Sensitivity of Secondary Structural Systems," by Y.Q. Chen and T.T. Soong, 10/23/89, (PB90-164658, A08, MF-A01).
- NCEER-89-0031 "Random Vibration and Reliability Analysis of Primary-Secondary Structural Systems," by Y. Ibrahim, M. Grigoriu and T.T. Soong, 11/10/89, (PB90-161951, A04, MF-A01).
- NCEER-89-0032 "Proceedings from the Second U.S. - Japan Workshop on Liquefaction, Large Ground Deformation and Their Effects on Lifelines, September 26-29, 1989," Edited by T.D. O'Rourke and M. Hamada, 12/1/89, (PB90-209388, A22, MF-A03).
- NCEER-89-0033 "Deterministic Model for Seismic Damage Evaluation of Reinforced Concrete Structures," by J.M. Bracci, A.M. Reinhorn, J.B. Mander and S.K. Kunnath, 9/27/89, (PB91-108803, A06, MF-A01).
- NCEER-89-0034 "On the Relation Between Local and Global Damage Indices," by E. DiPasquale and A.S. Cakmak, 8/15/89, (PB90-173865, A05, MF-A01).
- NCEER-89-0035 "Cyclic Undrained Behavior of Nonplastic and Low Plasticity Silts," by A.J. Walker and H.E. Stewart, 7/26/89, (PB90-183518, A10, MF-A01).
- NCEER-89-0036 "Liquefaction Potential of Surficial Deposits in the City of Buffalo, New York," by M. Budhu, R. Giese and L. Baumgrass, 1/17/89, (PB90-208455, A04, MF-A01).
- NCEER-89-0037 "A Deterministic Assessment of Effects of Ground Motion Incoherence," by A.S. Veletsos and Y. Tang, 7/15/89, (PB90-164294, A03, MF-A01).
- NCEER-89-0038 "Workshop on Ground Motion Parameters for Seismic Hazard Mapping," July 17-18, 1989, edited by R.V. Whitman, 12/1/89, (PB90-173923, A04, MF-A01).
- NCEER-89-0039 "Seismic Effects on Elevated Transit Lines of the New York City Transit Authority," by C.J. Costantino, C.A. Miller and E. Heymsfield, 12/26/89, (PB90-207887, A06, MF-A01).
- NCEER-89-0040 "Centrifugal Modeling of Dynamic Soil-Structure Interaction," by K. Weissman, Supervised by J.H. Prevost, 5/10/89, (PB90-207879, A07, MF-A01).

- NCEER-89-0041 "Linearized Identification of Buildings With Cores for Seismic Vulnerability Assessment," by I-K. Ho and A.E. Aktan, 11/1/89, (PB90-251943, A07, MF-A01).
- NCEER-90-0001 "Geotechnical and Lifeline Aspects of the October 17, 1989 Loma Prieta Earthquake in San Francisco," by T.D. O'Rourke, H.E. Stewart, F.T. Blackburn and T.S. Dickerman, 1/90, (PB90-208596, A05, MF-A01).
- NCEER-90-0002 "Nonnormal Secondary Response Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 2/28/90, (PB90-251976, A07, MF-A01).
- NCEER-90-0003 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/16/90, (PB91-251984, A05, MF-A05). This report has been replaced by NCEER-92-0018.
- NCEER-90-0004 "Catalog of Strong Motion Stations in Eastern North America," by R.W. Busby, 4/3/90, (PB90-251984, A05, MF-A01).
- NCEER-90-0005 "NCEER Strong-Motion Data Base: A User Manual for the GeoBase Release (Version 1.0 for the Sun3)," by P. Friberg and K. Jacob, 3/31/90 (PB90-258062, A04, MF-A01).
- NCEER-90-0006 "Seismic Hazard Along a Crude Oil Pipeline in the Event of an 1811-1812 Type New Madrid Earthquake," by H.H.M. Hwang and C-H.S. Chen, 4/16/90, (PB90-258054, A04, MF-A01).
- NCEER-90-0007 "Site-Specific Response Spectra for Memphis Sheahan Pumping Station," by H.H.M. Hwang and C.S. Lee, 5/15/90, (PB91-108811, A05, MF-A01).
- NCEER-90-0008 "Pilot Study on Seismic Vulnerability of Crude Oil Transmission Systems," by T. Ariman, R. Dobry, M. Grigoriu, F. Kozin, M. O'Rourke, T. O'Rourke and M. Shinozuka, 5/25/90, (PB91-108837, A06, MF-A01).
- NCEER-90-0009 "A Program to Generate Site Dependent Time Histories: EQGEN," by G.W. Ellis, M. Srinivasan and A.S. Cakmak, 1/30/90, (PB91-108829, A04, MF-A01).
- NCEER-90-0010 "Active Isolation for Seismic Protection of Operating Rooms," by M.E. Talbott, Supervised by M. Shinozuka, 6/8/9, (PB91-110205, A05, MF-A01).
- NCEER-90-0011 "Program LINEARID for Identification of Linear Structural Dynamic Systems," by C-B. Yun and M. Shinozuka, 6/25/90, (PB91-110312, A08, MF-A01).
- NCEER-90-0012 "Two-Dimensional Two-Phase Elasto-Plastic Seismic Response of Earth Dams," by A.N. Yiagos, Supervised by J.H. Prevost, 6/20/90, (PB91-110197, A13, MF-A02).
- NCEER-90-0013 "Secondary Systems in Base-Isolated Structures: Experimental Investigation, Stochastic Response and Stochastic Sensitivity," by G.D. Manolis, G. Juhn, M.C. Constantinou and A.M. Reinhorn, 7/1/90, (PB91-110320, A08, MF-A01).
- NCEER-90-0014 "Seismic Behavior of Lightly-Reinforced Concrete Column and Beam-Column Joint Details," by S.P. Pessiki, C.H. Conley, P. Gergely and R.N. White, 8/22/90, (PB91-108795, A11, MF-A02).
- NCEER-90-0015 "Two Hybrid Control Systems for Building Structures Under Strong Earthquakes," by J.N. Yang and A. Danielians, 6/29/90, (PB91-125393, A04, MF-A01).
- NCEER-90-0016 "Instantaneous Optimal Control with Acceleration and Velocity Feedback," by J.N. Yang and Z. Li, 6/29/90, (PB91-125401, A03, MF-A01).
- NCEER-90-0017 "Reconnaissance Report on the Northern Iran Earthquake of June 21, 1990," by M. Mehraein, 10/4/90, (PB91-125377, A03, MF-A01).

- NCEER-90-0018 "Evaluation of Liquefaction Potential in Memphis and Shelby County," by T.S. Chang, P.S. Tang, C.S. Lee and H. Hwang, 8/10/90, (PB91-125427, A09, MF-A01).
- NCEER-90-0019 "Experimental and Analytical Study of a Combined Sliding Disc Bearing and Helical Steel Spring Isolation System," by M.C. Constantinou, A.S. Mokha and A.M. Reinhorn, 10/4/90, (PB91-125385, A06, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-90-0020 "Experimental Study and Analytical Prediction of Earthquake Response of a Sliding Isolation System with a Spherical Surface," by A.S. Mokha, M.C. Constantinou and A.M. Reinhorn, 10/11/90, (PB91-125419, A05, MF-A01).
- NCEER-90-0021 "Dynamic Interaction Factors for Floating Pile Groups," by G. Gazetas, K. Fan, A. Kaynia and E. Kausel, 9/10/90, (PB91-170381, A05, MF-A01).
- NCEER-90-0022 "Evaluation of Seismic Damage Indices for Reinforced Concrete Structures," by S. Rodriguez-Gomez and A.S. Cakmak, 9/30/90, PB91-171322, A06, MF-A01).
- NCEER-90-0023 "Study of Site Response at a Selected Memphis Site," by H. Desai, S. Ahmad, E.S. Gazetas and M.R. Oh, 10/11/90, (PB91-196857, A03, MF-A01).
- NCEER-90-0024 "A User's Guide to Strongmo: Version 1.0 of NCEER's Strong-Motion Data Access Tool for PCs and Terminals," by P.A. Friberg and C.A.T. Susch, 11/15/90, (PB91-171272, A03, MF-A01).
- NCEER-90-0025 "A Three-Dimensional Analytical Study of Spatial Variability of Seismic Ground Motions," by L-L. Hong and A.H.-S. Ang, 10/30/90, (PB91-170399, A09, MF-A01).
- NCEER-90-0026 "MUMOID User's Guide - A Program for the Identification of Modal Parameters," by S. Rodriguez-Gomez and E. DiPasquale, 9/30/90, (PB91-171298, A04, MF-A01).
- NCEER-90-0027 "SARCF-II User's Guide - Seismic Analysis of Reinforced Concrete Frames," by S. Rodriguez-Gomez, Y.S. Chung and C. Meyer, 9/30/90, (PB91-171280, A05, MF-A01).
- NCEER-90-0028 "Viscous Dampers: Testing, Modeling and Application in Vibration and Seismic Isolation," by N. Makris and M.C. Constantinou, 12/20/90 (PB91-190561, A06, MF-A01).
- NCEER-90-0029 "Soil Effects on Earthquake Ground Motions in the Memphis Area," by H. Hwang, C.S. Lee, K.W. Ng and T.S. Chang, 8/2/90, (PB91-190751, A05, MF-A01).
- NCEER-91-0001 "Proceedings from the Third Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction, December 17-19, 1990," edited by T.D. O'Rourke and M. Hamada, 2/1/91, (PB91-179259, A99, MF-A04).
- NCEER-91-0002 "Physical Space Solutions of Non-Proportionally Damped Systems," by M. Tong, Z. Liang and G.C. Lee, 1/15/91, (PB91-179242, A04, MF-A01).
- NCEER-91-0003 "Seismic Response of Single Piles and Pile Groups," by K. Fan and G. Gazetas, 1/10/91, (PB92-174994, A04, MF-A01).
- NCEER-91-0004 "Damping of Structures: Part 1 - Theory of Complex Damping," by Z. Liang and G. Lee, 10/10/91, (PB92-197235, A12, MF-A03).
- NCEER-91-0005 "3D-BASIS - Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures: Part II," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 2/28/91, (PB91-190553, A07, MF-A01). This report has been replaced by NCEER-93-0011.

- NCEER-91-0006 "A Multidimensional Hysteretic Model for Plasticity Deforming Metals in Energy Absorbing Devices," by E.J. Graesser and F.A. Cozzarelli, 4/9/91, (PB92-108364, A04, MF-A01).
- NCEER-91-0007 "A Framework for Customizable Knowledge-Based Expert Systems with an Application to a KBES for Evaluating the Seismic Resistance of Existing Buildings," by E.G. Ibarra-Anaya and S.J. Fenves, 4/9/91, (PB91-210930, A08, MF-A01).
- NCEER-91-0008 "Nonlinear Analysis of Steel Frames with Semi-Rigid Connections Using the Capacity Spectrum Method," by G.G. Deierlein, S-H. Hsieh, Y-J. Shen and J.F. Abel, 7/2/91, (PB92-113828, A05, MF-A01).
- NCEER-91-0009 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/30/91, (PB91-212142, A06, MF-A01). This report has been replaced by NCEER-92-0018.
- NCEER-91-0010 "Phase Wave Velocities and Displacement Phase Differences in a Harmonically Oscillating Pile," by N. Makris and G. Gazetas, 7/8/91, (PB92-108356, A04, MF-A01).
- NCEER-91-0011 "Dynamic Characteristics of a Full-Size Five-Story Steel Structure and a 2/5 Scale Model," by K.C. Chang, G.C. Yao, G.C. Lee, D.S. Hao and Y.C. Yeh, 7/2/91, (PB93-116648, A06, MF-A02).
- NCEER-91-0012 "Seismic Response of a 2/5 Scale Steel Structure with Added Viscoelastic Dampers," by K.C. Chang, T.T. Soong, S-T. Oh and M.L. Lai, 5/17/91, (PB92-110816, A05, MF-A01).
- NCEER-91-0013 "Earthquake Response of Retaining Walls; Full-Scale Testing and Computational Modeling," by S. Alampalli and A-W.M. Elgamal, 6/20/91, to be published.
- NCEER-91-0014 "3D-BASIS-M: Nonlinear Dynamic Analysis of Multiple Building Base Isolated Structures," by P.C. Tsopelas, S. Nagarajaiah, M.C. Constantinou and A.M. Reinhorn, 5/28/91, (PB92-113885, A09, MF-A02).
- NCEER-91-0015 "Evaluation of SEAOC Design Requirements for Sliding Isolated Structures," by D. Theodossiou and M.C. Constantinou, 6/10/91, (PB92-114602, A11, MF-A03).
- NCEER-91-0016 "Closed-Loop Modal Testing of a 27-Story Reinforced Concrete Flat Plate-Core Building," by H.R. Somaprasad, T. Toksoy, H. Yoshiyuki and A.E. Aktan, 7/15/91, (PB92-129980, A07, MF-A02).
- NCEER-91-0017 "Shake Table Test of a 1/6 Scale Two-Story Lightly Reinforced Concrete Building," by A.G. El-Attar, R.N. White and P. Gergely, 2/28/91, (PB92-222447, A06, MF-A02).
- NCEER-91-0018 "Shake Table Test of a 1/8 Scale Three-Story Lightly Reinforced Concrete Building," by A.G. El-Attar, R.N. White and P. Gergely, 2/28/91, (PB93-116630, A08, MF-A02).
- NCEER-91-0019 "Transfer Functions for Rigid Rectangular Foundations," by A.S. Veletsos, A.M. Prasad and W.H. Wu, 7/31/91, to be published.
- NCEER-91-0020 "Hybrid Control of Seismic-Excited Nonlinear and Inelastic Structural Systems," by J.N. Yang, Z. Li and A. Danielians, 8/1/91, (PB92-143171, A06, MF-A02).
- NCEER-91-0021 "The NCEER-91 Earthquake Catalog: Improved Intensity-Based Magnitudes and Recurrence Relations for U.S. Earthquakes East of New Madrid," by L. Seeber and J.G. Armbruster, 8/28/91, (PB92-176742, A06, MF-A02).
- NCEER-91-0022 "Proceedings from the Implementation of Earthquake Planning and Education in Schools: The Need for Change - The Roles of the Changemakers," by K.E.K. Ross and F. Winslow, 7/23/91, (PB92-129998, A12, MF-A03).
- NCEER-91-0023 "A Study of Reliability-Based Criteria for Seismic Design of Reinforced Concrete Frame Buildings," by H.H.M. Hwang and H-M. Hsu, 8/10/91, (PB92-140235, A09, MF-A02).

- NCEER-91-0024 "Experimental Verification of a Number of Structural System Identification Algorithms," by R.G. Ghanem, H. Gavin and M. Shinozuka, 9/18/91, (PB92-176577, A18, MF-A04).
- NCEER-91-0025 "Probabilistic Evaluation of Liquefaction Potential," by H.H.M. Hwang and C.S. Lee," 11/25/91, (PB92-143429, A05, MF-A01).
- NCEER-91-0026 "Instantaneous Optimal Control for Linear, Nonlinear and Hysteretic Structures - Stable Controllers," by J.N. Yang and Z. Li, 11/15/91, (PB92-163807, A04, MF-A01).
- NCEER-91-0027 "Experimental and Theoretical Study of a Sliding Isolation System for Bridges," by M.C. Constantinou, A. Kartoum, A.M. Reinhorn and P. Bradford, 11/15/91, (PB92-176973, A10, MF-A03).
- NCEER-92-0001 "Case Studies of Liquefaction and Lifeline Performance During Past Earthquakes, Volume 1: Japanese Case Studies," Edited by M. Hamada and T. O'Rourke, 2/17/92, (PB92-197243, A18, MF-A04).
- NCEER-92-0002 "Case Studies of Liquefaction and Lifeline Performance During Past Earthquakes, Volume 2: United States Case Studies," Edited by T. O'Rourke and M. Hamada, 2/17/92, (PB92-197250, A20, MF-A04).
- NCEER-92-0003 "Issues in Earthquake Education," Edited by K. Ross, 2/3/92, (PB92-222389, A07, MF-A02).
- NCEER-92-0004 "Proceedings from the First U.S. - Japan Workshop on Earthquake Protective Systems for Bridges," Edited by I.G. Buckle, 2/4/92, (PB94-142239, A99, MF-A06).
- NCEER-92-0005 "Seismic Ground Motion from a Haskell-Type Source in a Multiple-Layered Half-Space," A.P. Theoharis, G. Deodatis and M. Shinozuka, 1/2/92, to be published.
- NCEER-92-0006 "Proceedings from the Site Effects Workshop," Edited by R. Whitman, 2/29/92, (PB92-197201, A04, MF-A01).
- NCEER-92-0007 "Engineering Evaluation of Permanent Ground Deformations Due to Seismically-Induced Liquefaction," by M.H. Baziar, R. Dobry and A-W.M. Elgamal, 3/24/92, (PB92-222421, A13, MF-A03).
- NCEER-92-0008 "A Procedure for the Seismic Evaluation of Buildings in the Central and Eastern United States," by C.D. Poland and J.O. Malley, 4/2/92, (PB92-222439, A20, MF-A04).
- NCEER-92-0009 "Experimental and Analytical Study of a Hybrid Isolation System Using Friction Controllable Sliding Bearings," by M.Q. Feng, S. Fujii and M. Shinozuka, 5/15/92, (PB93-150282, A06, MF-A02).
- NCEER-92-0010 "Seismic Resistance of Slab-Column Connections in Existing Non-Ductile Flat-Plate Buildings," by A.J. Durrani and Y. Du, 5/18/92, (PB93-116812, A06, MF-A02).
- NCEER-92-0011 "The Hysteretic and Dynamic Behavior of Brick Masonry Walls Upgraded by Ferrocement Coatings Under Cyclic Loading and Strong Simulated Ground Motion," by H. Lee and S.P. Prawl, 5/11/92, to be published.
- NCEER-92-0012 "Study of Wire Rope Systems for Seismic Protection of Equipment in Buildings," by G.F. Demetriades, M.C. Constantinou and A.M. Reinhorn, 5/20/92, (PB93-116655, A08, MF-A02).
- NCEER-92-0013 "Shape Memory Structural Dampers: Material Properties, Design and Seismic Testing," by P.R. Witting and F.A. Cozzarelli, 5/26/92, (PB93-116663, A05, MF-A01).
- NCEER-92-0014 "Longitudinal Permanent Ground Deformation Effects on Buried Continuous Pipelines," by M.J. O'Rourke, and C. Nordberg, 6/15/92, (PB93-116671, A08, MF-A02).
- NCEER-92-0015 "A Simulation Method for Stationary Gaussian Random Functions Based on the Sampling Theorem," by M. Grigoriu and S. Balopoulou, 6/11/92, (PB93-127496, A05, MF-A01).

- NCEER-92-0016 "Gravity-Load-Designed Reinforced Concrete Buildings: Seismic Evaluation of Existing Construction and Detailing Strategies for Improved Seismic Resistance," by G.W. Hoffmann, S.K. Kunnath, A.M. Reinhorn and J.B. Mander, 7/15/92, (PB94-142007, A08, MF-A02).
- NCEER-92-0017 "Observations on Water System and Pipeline Performance in the Limón Area of Costa Rica Due to the April 22, 1991 Earthquake," by M. O'Rourke and D. Ballantyne, 6/30/92, (PB93-126811, A06, MF-A02).
- NCEER-92-0018 "Fourth Edition of Earthquake Education Materials for Grades K-12," Edited by K.E.K. Ross, 8/10/92, (PB93-114023, A07, MF-A02).
- NCEER-92-0019 "Proceedings from the Fourth Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction," Edited by M. Hamada and T.D. O'Rourke, 8/12/92, (PB93-163939, A99, MF-E11).
- NCEER-92-0020 "Active Bracing System: A Full Scale Implementation of Active Control," by A.M. Reinhorn, T.T. Soong, R.C. Lin, M.A. Riley, Y.P. Wang, S. Aizawa and M. Higashino, 8/14/92, (PB93-127512, A06, MF-A02).
- NCEER-92-0021 "Empirical Analysis of Horizontal Ground Displacement Generated by Liquefaction-Induced Lateral Spreads," by S.F. Bartlett and T.L. Youd, 8/17/92, (PB93-188241, A06, MF-A02).
- NCEER-92-0022 "IDARC Version 3.0: Inelastic Damage Analysis of Reinforced Concrete Structures," by S.K. Kunnath, A.M. Reinhorn and R.F. Lobo, 8/31/92, (PB93-227502, A07, MF-A02).
- NCEER-92-0023 "A Semi-Empirical Analysis of Strong-Motion Peaks in Terms of Seismic Source, Propagation Path and Local Site Conditions," by M. Kamiyama, M.J. O'Rourke and R. Flores-Berrones, 9/9/92, (PB93-150266, A08, MF-A02).
- NCEER-92-0024 "Seismic Behavior of Reinforced Concrete Frame Structures with Nonductile Details, Part I: Summary of Experimental Findings of Full Scale Beam-Column Joint Tests," by A. Beres, R.N. White and P. Gergely, 9/30/92, (PB93-227783, A05, MF-A01).
- NCEER-92-0025 "Experimental Results of Repaired and Retrofitted Beam-Column Joint Tests in Lightly Reinforced Concrete Frame Buildings," by A. Beres, S. El-Borgi, R.N. White and P. Gergely, 10/29/92, (PB93-227791, A05, MF-A01).
- NCEER-92-0026 "A Generalization of Optimal Control Theory: Linear and Nonlinear Structures," by J.N. Yang, Z. Li and S. Vongchavalitkul, 11/2/92, (PB93-188621, A05, MF-A01).
- NCEER-92-0027 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part I - Design and Properties of a One-Third Scale Model Structure," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/1/92, (PB94-104502, A08, MF-A02).
- NCEER-92-0028 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part II - Experimental Performance of Subassemblages," by L.E. Aycardi, J.B. Mander and A.M. Reinhorn, 12/1/92, (PB94-104510, A08, MF-A02).
- NCEER-92-0029 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part III - Experimental Performance and Analytical Study of a Structural Model," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/1/92, (PB93-227528, A09, MF-A01).
- NCEER-92-0030 "Evaluation of Seismic Retrofit of Reinforced Concrete Frame Structures: Part I - Experimental Performance of Retrofitted Subassemblages," by D. Choudhuri, J.B. Mander and A.M. Reinhorn, 12/8/92, (PB93-198307, A07, MF-A02).

- NCEER-92-0031 "Evaluation of Seismic Retrofit of Reinforced Concrete Frame Structures: Part II - Experimental Performance and Analytical Study of a Retrofitted Structural Model," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/8/92, (PB93-198315, A09, MF-A03).
- NCEER-92-0032 "Experimental and Analytical Investigation of Seismic Response of Structures with Supplemental Fluid Viscous Dampers," by M.C. Constantinou and M.D. Symans, 12/21/92, (PB93-191435, A10, MF-A03).
- NCEER-92-0033 "Reconnaissance Report on the Cairo, Egypt Earthquake of October 12, 1992," by M. Khater, 12/23/92, (PB93-188621, A03, MF-A01).
- NCEER-92-0034 "Low-Level Dynamic Characteristics of Four Tall Flat-Plate Buildings in New York City," by H. Gavin, S. Yuan, J. Grossman, E. Pekelis and K. Jacob, 12/28/92, (PB93-188217, A07, MF-A02).
- NCEER-93-0001 "An Experimental Study on the Seismic Performance of Brick-Infilled Steel Frames With and Without Retrofit," by J.B. Mander, B. Nair, K. Wojtkowski and J. Ma, 1/29/93, (PB93-227510, A07, MF-A02).
- NCEER-93-0002 "Social Accounting for Disaster Preparedness and Recovery Planning," by S. Cole, E. Pantoja and V. Razak, 2/22/93, (PB94-142114, A12, MF-A03).
- NCEER-93-0003 "Assessment of 1991 NEHRP Provisions for Nonstructural Components and Recommended Revisions," by T.T. Soong, G. Chen, Z. Wu, R-H. Zhang and M. Grigoriu, 3/1/93, (PB93-188639, A06, MF-A02).
- NCEER-93-0004 "Evaluation of Static and Response Spectrum Analysis Procedures of SEAOC/UBC for Seismic Isolated Structures," by C.W. Winters and M.C. Constantinou, 3/23/93, (PB93-198299, A10, MF-A03).
- NCEER-93-0005 "Earthquakes in the Northeast - Are We Ignoring the Hazard? A Workshop on Earthquake Science and Safety for Educators," edited by K.E.K. Ross, 4/2/93, (PB94-103066, A09, MF-A02).
- NCEER-93-0006 "Inelastic Response of Reinforced Concrete Structures with Viscoelastic Braces," by R.F. Lobo, J.M. Bracci, K.L. Shen, A.M. Reinhorn and T.T. Soong, 4/5/93, (PB93-227486, A05, MF-A02).
- NCEER-93-0007 "Seismic Testing of Installation Methods for Computers and Data Processing Equipment," by K. Kosar, T.T. Soong, K.L. Shen, J.A. HoLung and Y.K. Lin, 4/12/93, (PB93-198299, A07, MF-A02).
- NCEER-93-0008 "Retrofit of Reinforced Concrete Frames Using Added Dampers," by A. Reinhorn, M. Constantinou and C. Li, to be published.
- NCEER-93-0009 "Seismic Behavior and Design Guidelines for Steel Frame Structures with Added Viscoelastic Dampers," by K.C. Chang, M.L. Lai, T.T. Soong, D.S. Hao and Y.C. Yeh, 5/1/93, (PB94-141959, A07, MF-A02).
- NCEER-93-0010 "Seismic Performance of Shear-Critical Reinforced Concrete Bridge Piers," by J.B. Mander, S.M. Waheed, M.T.A. Chaudhary and S.S. Chen, 5/12/93, (PB93-227494, A08, MF-A02).
- NCEER-93-0011 "3D-BASIS-TABS: Computer Program for Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures," by S. Nagarajaiah, C. Li, A.M. Reinhorn and M.C. Constantinou, 8/2/93, (PB94-141819, A09, MF-A02).
- NCEER-93-0012 "Effects of Hydrocarbon Spills from an Oil Pipeline Break on Ground Water," by O.J. Helweg and H.H.M. Hwang, 8/3/93, (PB94-141942, A06, MF-A02).
- NCEER-93-0013 "Simplified Procedures for Seismic Design of Nonstructural Components and Assessment of Current Code Provisions," by M.P. Singh, L.E. Suarez, E.E. Matheu and G.O. Maldonado, 8/4/93, (PB94-141827, A09, MF-A02).
- NCEER-93-0014 "An Energy Approach to Seismic Analysis and Design of Secondary Systems," by G. Chen and T.T. Soong, 8/6/93, (PB94-142767, A11, MF-A03).

- NCEER-93-0015 "Proceedings from School Sites: Becoming Prepared for Earthquakes - Commemorating the Third Anniversary of the Loma Prieta Earthquake," Edited by F.E. Winslow and K.E.K. Ross, 8/16/93, (PB94-154275, A16, MF-A02).
- NCEER-93-0016 "Reconnaissance Report of Damage to Historic Monuments in Cairo, Egypt Following the October 12, 1992 Dahshur Earthquake," by D. Sykora, D. Look, G. Croci, E. Karaesmen and E. Karaesmen, 8/19/93, (PB94-142221, A08, MF-A02).
- NCEER-93-0017 "The Island of Guam Earthquake of August 8, 1993," by S.W. Swan and S.K. Harris, 9/30/93, (PB94-141843, A04, MF-A01).
- NCEER-93-0018 "Engineering Aspects of the October 12, 1992 Egyptian Earthquake," by A.W. Elgamal, M. Amer, K. Adalier and A. Abul-Fadl, 10/7/93, (PB94-141983, A05, MF-A01).
- NCEER-93-0019 "Development of an Earthquake Motion Simulator and its Application in Dynamic Centrifuge Testing," by I. Krstelj, Supervised by J.H. Prevost, 10/23/93, (PB94-181773, A-10, MF-A03).
- NCEER-93-0020 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a Friction Pendulum System (FPS)," by M.C. Constantinou, P. Tsopelas, Y-S. Kim and S. Okamoto, 11/1/93, (PB94-142775, A08, MF-A02).
- NCEER-93-0021 "Finite Element Modeling of Elastomeric Seismic Isolation Bearings," by L.J. Billings, Supervised by R. Shepherd, 11/8/93, to be published.
- NCEER-93-0022 "Seismic Vulnerability of Equipment in Critical Facilities: Life-Safety and Operational Consequences," by K. Porter, G.S. Johnson, M.M. Zadeh, C. Scawthorn and S. Eder, 11/24/93, (PB94-181765, A16, MF-A03).
- NCEER-93-0023 "Hokkaido' Nansei-oki, Japan Earthquake of July 12, 1993, by P.I. Yanev and C.R. Scawthorn, 12/23/93, (PB94-181500, A07, MF-A01).
- NCEER-94-0001 "An Evaluation of Seismic Serviceability of Water Supply Networks with Application to the San Francisco Auxiliary Water Supply System," by I. Markov, Supervised by M. Grigoriu and T. O'Rourke, 1/21/94, (PB94-204013, A07, MF-A02).
- NCEER-94-0002 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of Systems Consisting of Sliding Bearings, Rubber Restoring Force Devices and Fluid Dampers," Volumes I and II, by P. Tsopelas, S. Okamoto, M.C. Constantinou, D. Ozaki and S. Fujii, 2/4/94, (PB94-181740, A09, MF-A02 and PB94-181757, A12, MF-A03).
- NCEER-94-0003 "A Markov Model for Local and Global Damage Indices in Seismic Analysis," by S. Rahman and M. Grigoriu, 2/18/94, (PB94-206000, A12, MF-A03).
- NCEER-94-0004 "Proceedings from the NCEER Workshop on Seismic Response of Masonry Infills," edited by D.P. Abrams, 3/1/94, (PB94-180783, A07, MF-A02).
- NCEER-94-0005 "The Northridge, California Earthquake of January 17, 1994: General Reconnaissance Report," edited by J.D. Goltz, 3/11/94, (PB193943, A10, MF-A03).
- NCEER-94-0006 "Seismic Energy Based Fatigue Damage Analysis of Bridge Columns: Part I - Evaluation of Seismic Capacity," by G.A. Chang and J.B. Mander, 3/14/94, (PB94-219185, A11, MF-A03).
- NCEER-94-0007 "Seismic Isolation of Multi-Story Frame Structures Using Spherical Sliding Isolation Systems," by T.M. Al-Hussaini, V.A. Zayas and M.C. Constantinou, 3/17/94, (PB193745, A09, MF-A02).

- NCEER-94-0008 "The Northridge, California Earthquake of January 17, 1994: Performance of Highway Bridges," edited by I.G. Buckle, 3/24/94, (PB94-193851, A06, MF-A02).
- NCEER-94-0009 "Proceedings of the Third U.S.-Japan Workshop on Earthquake Protective Systems for Bridges," edited by I.G. Buckle and I. Friedland, 3/31/94, (PB94-195815, A99, MF-A06).
- NCEER-94-0010 "3D-BASIS-ME: Computer Program for Nonlinear Dynamic Analysis of Seismically Isolated Single and Multiple Structures and Liquid Storage Tanks," by P.C. Tsopelas, M.C. Constantinou and A.M. Reinhorn, 4/12/94, (PB94-204922, A09, MF-A02).
- NCEER-94-0011 "The Northridge, California Earthquake of January 17, 1994: Performance of Gas Transmission Pipelines," by T.D. O'Rourke and M.C. Palmer, 5/16/94, (PB94-204989, A05, MF-A01).
- NCEER-94-0012 "Feasibility Study of Replacement Procedures and Earthquake Performance Related to Gas Transmission Pipelines," by T.D. O'Rourke and M.C. Palmer, 5/25/94, (PB94-206638, A09, MF-A02).
- NCEER-94-0013 "Seismic Energy Based Fatigue Damage Analysis of Bridge Columns: Part II - Evaluation of Seismic Demand," by G.A. Chang and J.B. Mander, 6/1/94, (PB95-18106, A08, MF-A02).
- NCEER-94-0014 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a System Consisting of Sliding Bearings and Fluid Restoring Force/Damping Devices," by P. Tsopelas and M.C. Constantinou, 6/13/94, (PB94-219144, A10, MF-A03).
- NCEER-94-0015 "Generation of Hazard-Consistent Fragility Curves for Seismic Loss Estimation Studies," by H. Hwang and J-R. Huo, 6/14/94, (PB95-181996, A09, MF-A02).
- NCEER-94-0016 "Seismic Study of Building Frames with Added Energy-Absorbing Devices," by W.S. Pong, C.S. Tsai and G.C. Lee, 6/20/94, (PB94-219136, A10, A03).
- NCEER-94-0017 "Sliding Mode Control for Seismic-Excited Linear and Nonlinear Civil Engineering Structures," by J. Yang, J. Wu, A. Agrawal and Z. Li, 6/21/94, (PB95-138483, A06, MF-A02).
- NCEER-94-0018 "3D-BASIS-TABS Version 2.0: Computer Program for Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures," by A.M. Reinhorn, S. Nagarajah, M.C. Constantinou, P. Tsopelas and R. Li, 6/22/94, (PB95-182176, A08, MF-A02).
- NCEER-94-0019 "Proceedings of the International Workshop on Civil Infrastructure Systems: Application of Intelligent Systems and Advanced Materials on Bridge Systems," Edited by G.C. Lee and K.C. Chang, 7/18/94, (PB95-252474, A20, MF-A04).
- NCEER-94-0020 "Study of Seismic Isolation Systems for Computer Floors," by V. Lambrou and M.C. Constantinou, 7/19/94, (PB95-138533, A10, MF-A03).
- NCEER-94-0021 "Proceedings of the U.S.-Italian Workshop on Guidelines for Seismic Evaluation and Rehabilitation of Unreinforced Masonry Buildings," Edited by D.P. Abrams and G.M. Calvi, 7/20/94, (PB95-138749, A13, MF-A03).
- NCEER-94-0022 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a System Consisting of Lubricated PTFE Sliding Bearings and Mild Steel Dampers," by P. Tsopelas and M.C. Constantinou, 7/22/94, (PB95-182184, A08, MF-A02).
- NCEER-94-0023 "Development of Reliability-Based Design Criteria for Buildings Under Seismic Load," by Y.K. Wen, H. Hwang and M. Shinozuka, 8/1/94, (PB95-211934, A08, MF-A02).

- NCEER-94-0024 "Experimental Verification of Acceleration Feedback Control Strategies for an Active Tendon System," by S.J. Dyke, B.F. Spencer, Jr., P. Quast, M.K. Sain, D.C. Kaspari, Jr. and T.T. Soong, 8/29/94, (PB95-212320, A05, MF-A01).
- NCEER-94-0025 "Seismic Retrofitting Manual for Highway Bridges," Edited by I.G. Buckle and I.F. Friedland, to be published.
- NCEER-94-0026 "Proceedings from the Fifth U.S.-Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction," Edited by T.D. O'Rourke and M. Hamada, 11/7/94, (PB95-220802, A99, MF-E08).
- NCEER-95-0001 "Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part 1 - Fluid Viscous Damping Devices," by A.M. Reinhorn, C. Li and M.C. Constantinou, 1/3/95, (PB95-266599, A09, MF-A02).
- NCEER-95-0002 "Experimental and Analytical Study of Low-Cycle Fatigue Behavior of Semi-Rigid Top-And-Seat Angle Connections," by G. Pekcan, J.B. Mander and S.S. Chen, 1/5/95, (PB95-220042, A07, MF-A02).
- NCEER-95-0003 "NCEER-ATC Joint Study on Fragility of Buildings," by T. Anagnos, C. Rojahn and A.S. Kiremidjian, 1/20/95, (PB95-220026, A06, MF-A02).
- NCEER-95-0004 "Nonlinear Control Algorithms for Peak Response Reduction," by Z. Wu, T.T. Soong, V. Gattulli and R.C. Lin, 2/16/95, (PB95-220349, A05, MF-A01).
- NCEER-95-0005 "Pipeline Replacement Feasibility Study: A Methodology for Minimizing Seismic and Corrosion Risks to Underground Natural Gas Pipelines," by R.T. Eguchi, H.A. Seligson and D.G. Honegger, 3/2/95, (PB95-252326, A06, MF-A02).
- NCEER-95-0006 "Evaluation of Seismic Performance of an 11-Story Frame Building During the 1994 Northridge Earthquake," by F. Naeim, R. DiSulio, K. Benuska, A. Reinhorn and C. Li, to be published.
- NCEER-95-0007 "Prioritization of Bridges for Seismic Retrofitting," by N. Basöz and A.S. Kiremidjian, 4/24/95, (PB95-252300, A08, MF-A02).
- NCEER-95-0008 "Method for Developing Motion Damage Relationships for Reinforced Concrete Frames," by A. Singhal and A.S. Kiremidjian, 5/11/95, (PB95-266607, A06, MF-A02).
- NCEER-95-0009 "Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part II - Friction Devices," by C. Li and A.M. Reinhorn, 7/6/95, (PB96-128087, A11, MF-A03).
- NCEER-95-0010 "Experimental Performance and Analytical Study of a Non-Ductile Reinforced Concrete Frame Structure Retrofitted with Elastomeric Spring Dampers," by G. Pekcan, J.B. Mander and S.S. Chen, 7/14/95, (PB96-137161, A08, MF-A02).
- NCEER-95-0011 "Development and Experimental Study of Semi-Active Fluid Damping Devices for Seismic Protection of Structures," by M.D. Symans and M.C. Constantinou, 8/3/95, (PB96-136940, A23, MF-A04).
- NCEER-95-0012 "Real-Time Structural Parameter Modification (RSPM): Development of Innervated Structures," by Z. Liang, M. Tong and G.C. Lee, 4/11/95, (PB96-137153, A06, MF-A01).
- NCEER-95-0013 "Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part III - Viscous Damping Walls," by A.M. Reinhorn and C. Li, 10/1/95.
- NCEER-95-0014 "Seismic Fragility Analysis of Equipment and Structures in a Memphis Electric Substation," by J-R. Huo and H.H.M. Hwang, 8/10/95.

- NCEER-95-0015 "The Hanshin-Awaji Earthquake of January 17, 1995: Performance of Lifelines," Edited by M. Shinozuka, 11/3/95, (PB96-176383, A15, MF-A03).
- NCEER-95-0016 "Highway Culvert Performance During Earthquakes," by T.L. Youd and C.J. Beckman, 11/6/95, to be published.
- NCEER-95-0017 "The Hanshin-Awaji Earthquake of January 17, 1995: Performance of Highway Bridges," Edited by I.G. Buckle, 12/1/95, to be published.
- NCEER-95-0018 "Modeling of Masonry Infill Panels for Structural Analysis," by A.M. Reinhorn, A. Madan, R.E. Valles, Y. Reichmann and J.B. Mander, 12/8/95.
- NCEER-95-0019 "Optimal Polynomial Control for Linear and Nonlinear Structures," by A.K. Agrawal and J.N. Yang, 12/11/95, (PB96-168737, A07, MF-A02).
- NCEER-95-0020 "Retrofit of Non-Ductile Reinforced Concrete Frames Using Friction Dampers," by R.S. Rao, P. Gergely and R.N. White, 12/22/95.
- NCEER-95-0021 "Parametric Results for Seismic Response of Pile-Supported Bridge Bents," by G. Mylonakis, A. Nikolaou and G. Gazetas, 12/22/95.
- NCEER-95-0022 "Kinematic Bending Moments in Seismically Stressed Piles," by A. Nikolaou, G. Mylonakis and G. Gazetas, 12/23/95.
- NCEER-96-0001 "Dynamic Behavior of Unreinforced Masonry Buildings with Flexible Diaphragms," by A.C. Costley and D.P. Abrams," to be published.
- NCEER-96-0002 "State of the Art Review: Foundations and Retaining Structures," by I. Po Lam, to be published.
- NCEER-96-0003 "Ductility of Rectangular Reinforced Concrete Bridge Columns with Moderate Confinement," by N. Wehbe, M. Saiidi, D. Sanders and B. Douglas, 5/24/96.
- NCEER-96-0004 "Proceedings of the Long-Span Bridge Seismic Research Workshop," by I.G. Buckle and I.M. Friedland, to be published.
- NCEER-96-0005 "Establish Representative Pier Types for Comprehensive Study: Eastern United States," by J. Kulicki and Z. Prucz, 5/28/96.



Headquartered at the State University of New York at Buffalo

State University of New York at Buffalo
Red Jacket Quadrangle
Buffalo, New York 14261
Telephone: 716/645-3391
FAX: 716/645-3399

ISSN 1088-3800